

**ATHLON**  
RIDICULOUSLY GOOD OPTICS

# 2022 PRODUCT CATALOG

BINOCULARS

RIFLESCOPES +

SPOTTING SCOPES

RANGEFINDERS

RED DOTS

ACCESSORIES







CONTENT

8 BINOCULARS

11 Cronus G2 UHD

- 11 10x42
- 11 15x56

13 Cronus UHD  
Rangefinding Binoculars

- 13 10x50

14 Midas G2 UHD

- 14 10x25
- 14 10x42, 8x42
- 14 12x50, 10x50

17 Argos G2 UHD / HD

- 17 10x42, 8x42
- 17 10x42, 8x42
- 17 12x50, 10x50

18 Talos G2 HD

- 18 10x42, 8x42

21 Neos G2 HD

- 21 10x42, 8x42

22 RIFLESCOPES

24 Cronus BTR GEN2 UHD

- 24 1-6x24 SFP
- 24 4.5-29x56 FFP

27 Ares ETR UHD

- 27 1-10x24 FFP
- 29 3-18x50 FFP
- 29 4.5-30x56 FFP

30 Ares BTR GEN2 HD

- 30 2.5-15x50 FFP
- 30 4.5-27x50 FFP

33 Midas TAC HD

- 33 4-16x44 FFP
- 33 5-25x56 FFP
- 33 6-24x50 FFP

34 Midas HMR HD

- 34 2.5-15x50 SFP

37 Midas BTR GEN2 HD

- 37 1-6x24 SFP
- 37 4.5-27x50 SFP

38 Helos BTR / GEN2

- 38 1-4.5x24 SFP
- 38 1-10x28 SFP
- 40 2-12x42 FFP
- 42 4-20x50 FFP
- 42 6-24x56 FFP

45 Argos BTR GEN2

- 45 1-8x24 SFP
- 47 6-24x50 FFP
- 47 8-34x56 FFP
- 47 10-40x56 SFP

48 Argos HMR

- 48 2-12x42 SFP
- 48 4-20x50 SFP

51 Talos BTR

- 51 1-4x24 SFP
- 51 4-14x44 FFP

52 Talos

- 52 3-12x40 SFP
- 52 4-16x40 SFP
- 52 6-24x50 SFP

55 Neos

- 55 3-9x40 SFP
- 55 4-12x40 SFP
- 55 6-18x44 SFP

56 SPOTTING SCOPES

59 Ares G2 UHD

- 59 15-45x65 - 45 DEG / STR
- 59 22x Eyepiece
- 60 20-60x85 - 45 DEG / STR

63 Argos HD

- 63 20-60x85 - 45 DEG / STR

64 Talos

- 64 20-60x80 - 45 DEG

68 RED DOTS

69 Midas Red Dot Sights

- 69 TSR1
- 69 TSR2
- 69 TSR3
- 69 LE GEN2

70 Midas Prism Scopes

- 70 TSP1
- 70 TSP3
- 70 TSP4

73 Midas Magnifiers

- 73 M3
- 73 M5

74 LASER RANGEFINDERS

77 Midas 1 Mile

78 Talos 800Y

80 RIFLESCOPES CHART

80 Quick Comparison

82 RETICLE SUBTENSIONS

94 TRIPODS

96 ACCESSORIES



# KEY FEATURES



## EXTRA-LOW DISPERSION GLASS

Gives you an advantage with an image that has little or no chromatic fringe for the clearest and sharpest image.



## ESP DIELECTRIC COATING

Reflects over 99% of the light to your eyes bringing you a clear, bright image and accurate color reproduction.



## XPL COATING

Extra protection on the exterior lenses to prevent the scope from enduring dirt, oil, and potential scratches.



## SILVER COATED K9 PRISM

K9 glass prisms with silver coating reflects great amount of lights to your eyes which gives you bright image.



## LOCKING TURRETS

Allows you to pull up on your turret to dial and push down on the turret to lock it in place to avoid inadvertent adjustments.



## MOTION SENSOR

Built in motion detector automatically wakes the product up from the sleep mode when a motion is detected.



## WATERPROOF

Regardless of how heavy the rain is coming down or an accidental drop in the water, this sealed and gas-purged optic will remain waterproof.



## HD GLASS

HD glass gives you better light transmission, and brighter and sharper images.



## ADVANCED FMC

Advanced Fully Multi-Coated lenses provide better light transmission with optimum brightness and true color across the entire spectrum.



## PHASE CORRECTED PRISMS

Special coating on prisms that produces images with better contrast, a higher resolution and better color reproduction.



## APOCHROMATIC LENS SYSTEM

Helps in converging refracting colors into one focus point, producing greater contrast, sharpness, and color definition.



## ARGON PURGED

Argon gas has a low thermal conductivity compared to nitrogen gas, resulting in better fog proof capabilities.



## EXTENDED BATTERY LIFE

Offers 50,000 hours battery life at medium illumination setting.



## RAINPROOF

Don't let unexpected showers stop you. While not submersible, rainproof optics will shed water in the harshest conditions, so you can push forward.



## E2ES SYSTEM

A field flattening system that removes distortion on the outermost edge of the field of view.



## FULLY MULTI-COATED

Effectively reduces reflected light and increases the transmission of light giving you a brighter image than normal single coated lenses.




## BAK4 PRISMS

Produce a sharp, round exit pupil ultimately delivering higher light transmission and clarity to the edge of the image.



## PRECISION ZERO STOP SYSTEM

Allows you to return to your initial zero position with a sharp and precise stop, right on your initial zero.



## NITROGEN PURGED

Nitrogen gas is used to purge air from the optic to help maintain internal fog-proof and waterproof capabilities.



## RUBBER ARMOR

Provides additional protection and a durable, secure, non-slip soft texture grip for any weather condition.







## YOUR PRIZE IN OPTICS

ATHLON is a proud US sports optics product company devoted to designing and delivering superior quality optics products and outdoor accessories at a competitive price to our consumers via our distribution and retail channels. Athlon has strong engineering design capabilities, strategic alliances with quality manufacturers, and a streamlined fully integrated supply chain. These advantages enable us to bring the latest cutting edge technologies and cut out the extra layers of the traditional supply chain. With these advantages we are able to deliver goods and products to individual consumers' hands with great cost savings.

Our obsession with product quality and superior customer service for hunters, recreational shooters, and outdoor enthusiasts drives our business. The business model on which we founded Athlon allows us to deliver high quality optics at extremely competitive prices. Our goal from day one is to pass those savings to you, the outdoor enthusiast.

## LIFETIME WARRANTY

Your Athlon product is warranted to be free of defects in materials and workmanship for the lifetime of the product, Athlon will also repair or replace the product at no charge to you if you damage it through normal use. No receipt needed, no registration required. Athlon Optics is committed to providing the best product you can buy for your money. This warranty does not cover damages caused by deliberate damage, misuse, theft, or maintenance provided by someone other than the Athlon Authorized Service Department.



## NEW PRODUCTS

### BINOCULARS



TALOS G2 / pp. 18

### RED DOT SIGHTS



Midas LE GEN2 / pp. 69

### MAGNIFIERS



Midas M3 / pp. 73



Midas M5 / pp. 73


### TRIPODS



Midas Tripods / pp. 94





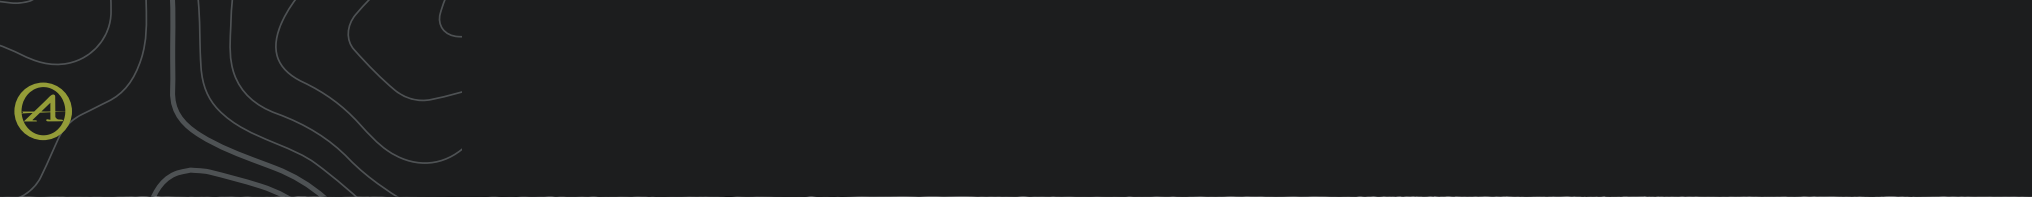

8-21

# BINOCULARS







# CRONUS G2 UHD

BINOCULARS

BINOCULARS



10 x 42 mm



15 x 56 mm

Designed for serious glassing with exceptional edge to edge clarity, sharp detail enhancement, ultra-clear brightness and true color representation. We designed these binoculars with our revolutionary E2ES lens system which gives you a flat field of view. We included UHD glass resulting in a clearer and sharper image. Dielectric coating reflects 99% of the light through the prism assembly. Our state of the art light weight Magnesium chassis helps lighten your load all the while maintaining ruggedness to withstand the scrapes & bumps of constant use. These Cronus binoculars can take a hit!

## PRODUCT SPECIFICATION

MODEL	OBJECTIVE LENS DIAMETER	EYE RELIEF	FIELD OF VIEW ANGULAR	FOV @1000 YARDS	CLOSE FOCUS	INTERPUPILLARY DISTANCE	WEIGHT	HEIGHT X WIDTH
15x56 mm	56 mm	18.5 mm	4.5 °	235 ft	13.1 ft	59-74 mm	45.2 oz	8.7x6.2"
10x42 mm	42 mm	19.3 mm	6.5 °	338 ft	6.6 ft	56-73 mm	27.8 oz	6.3x5.1"

## PRODUCT FEATURES



Phase Coated, BaK4 Prisms, Advanced Fully Multi-Coated Lenses, Magnesium Chassis, Locking Diopter, Long Eye Relief, Close Focus, Twist Up Eye-Cups, Waterproof, Tripod Adaptable

VISIT THE  
PRODUCT  
PAGE



BEST  
USED  
FOR







# CRONUS UHD

RANGEFINDER BINOCULARS



10 x 50 mm

With ranging capabilities from 5 to 1000 yards on a deer and out to 2600 yards on a reflective target, these rangefinding binoculars are perfect for any hunting or long range situation. We designed these binoculars with our revolutionary E2ES lens system that gives you a flat field of view. We included UHD glass that results in clearer and sharper image as well as an illuminated ranging display.

## PRODUCT SPECIFICATION

MODEL	OBJECTIVE LENS DIAMETER	EYE RELIEF	FIELD OF VIEW ANGULAR	FOV @1000 YARDS	CLOSE FOCUS	INTERPUPILLARY DISTANCE	WEIGHT	HEIGHT X WIDTH
10x50 mm	50 mm	17.0 mm	6.2 °	334 ft	9.8 ft	58-76 mm	38.0 oz	6.7x5.4"

## RANGEFINDING SPECIFICATION

RANGING REFLECTIVE	RANGING DEER	ACCURACY	POWER SUPPLY	DISPLAY
2600 Y	1000 Y	+ / -0.5 Y	CR2-3V	Red Illuminated OLED Display Screen

## PRODUCT FEATURES



Dual Units of Measurement (Y/M), Angle Compensation Mode, Argon Purged, Waterproof

VISIT THE  
PRODUCT  
PAGE



BEST  
USED  
FOR





# MIDAS G2 UHD

BINOCULARS



10 x 25 mm

10 x 42 mm / 8 x 42 mm

12 x 50 mm / 10 x 50 mm

Midas was known to have a golden touch. He must have laid his hands on these binoculars since they set the gold standard for this class of binoculars. The rugged benchmark for all-weather brightness and clarity, these Midas roof-prism binoculars are light and slim thanks to the magnesium chassis. Together with UHD glass lenses, Advanced Fully Multi-Coated optics, high-quality Bak-4 prisms with our ESP Dielectric coating plus phase coating, these Midas binoculars gather maximum light and produce brilliant color fidelity.

## PRODUCT SPECIFICATION

MODEL	OBJECTIVE LENS DIAMETER	EYE RELIEF	FIELD OF VIEW ANGULAR	FOV @1000 YARDS	CLOSE FOCUS	INTERPUPILLARY DISTANCE	WEIGHT	HEIGHT X WIDTH
12x50 mm	50 mm	15.0 mm	5.4 °	281 ft	11.5 ft	59-74 mm	32 oz	6.7x5.4"
10x50 mm	50 mm	16.9 mm	6.5 °	341 ft	9.8 ft	59-74 mm	32 oz	6.7x5.4"
10x42 mm	42 mm	15.2 mm	6.5 °	341 ft	8.2 ft	57-74 mm	23.3 oz	5.7x5.2"
8x42 mm	42 mm	17.2 mm	8.1 °	426 ft	6.5 ft	57-74 mm	23.3 oz	5.7x5.2"
10x25 mm	25 mm	15.5 mm	5.4 °	285 ft	5.2 ft	56-74 mm	8.3 oz	4.3x4.1"

## PRODUCT FEATURES



Phase Coated, Magnesium Chassis, Bak-4 Glass Prisms, Advanced Fully Multi-Coated Lenses, Long Eye Relief, Close Focus, Twist Up Eye-Cups, Waterproof, Tripod Adaptable



BEST  
USED  
FOR



VISIT THE  
PRODUCT  
PAGE







# ARGOS G2 UHD / HD

BINOCULARS



10 x 42 mm / 8 x 42 mm  
(UHD)



10 x 42 mm / 8 x 42 mm  
(HD)



12 x 50 mm / 10 x 50 mm  
(HD)

The Argos G2 line features affordable options with HD or UHD glass, both with Advanced Fully Multi-Coated Optics for sharp contrast, true color and excellent light transmission. They also have Bak-4 prism glass with ESP Dielectric coating and phase correction for enhanced color fidelity and sharpness. All Argos G2 binoculars are Argon gas purged for waterproofing & non-fogging capabilities. The durable and ergonomic magnesium chassis takes weight off your neck but at the same time stands up to the demands of hunting in any conditions.

## PRODUCT SPECIFICATION

MODEL	OBJECTIVE LENS DIAMETER	EYE RELIEF	FIELD OF VIEW ANGULAR	FOV @1000 YARDS	CLOSE FOCUS	INTERPUPILLARY DISTANCE	WEIGHT	HEIGHT X WIDTH
HD 12x50 mm	50 mm	16.0 mm	4.9 °	257 ft	13 ft	56-76 mm	31.5 oz	6.8x5.6"
HD 10x50 mm	50 mm	17.0 mm	5.8 °	304 ft	13 ft	56-76 mm	31.5 oz	6.8x5.6"
HD 10x42 mm	42 mm	16.1 mm	6.1 °	319 ft	13 ft	56-76 mm	25.5 oz	5.7x5.3"
HD 8x42 mm	42 mm	17.3 mm	7.1 °	371 ft	13 ft	56-76 mm	25.5 oz	5.7x5.3"
UHD 10x42 mm	42 mm	16.1 mm	6.1 °	319 ft	13 ft	56-76 mm	25.5 oz	5.7x5.3"
UHD 8x42 mm	42 mm	17.3 mm	7.1 °	371 ft	13 ft	56-76 mm	25.5 oz	5.7x5.3"

## PRODUCT FEATURES



Bak-4 Glass Prisms, Advanced Fully Multi-Coated Lenses, Long Eye Relief, Close Focus, Twist Up Eye-Cups, Waterproof, Tripod Adaptable

VISIT THE  
PRODUCT  
PAGE



BEST  
USED  
FOR



BINOCULARS

ARGOS G2 UHD / HD

athlonoptics.com





# TALOS G2 HD

BINOCULARS

NEW



10 x 42 mm / 8 x 42 mm

Blaze your own trail with the Talos HD. Featuring a rugged and lightweight fully sealed and nitrogen purged composite chassis to brave the elements. Advanced Fully-Multicoated lenses paired with HD lenses provide optimum light transmission and true color representation unheard of at this price point. Low dispersion HD Glass significantly reduces chromatic aberration, delivering high clarity, contrast, and resolution. Next time a ridiculously big buck steps out of the shadows, catch him off guard and turn him into a wall hanger.

## PRODUCT SPECIFICATION

MODEL	OBJECTIVE LENS DIAMETER	EYE RELIEF	FIELD OF VIEW ANGULAR	FOV @1000 YARDS	CLOSE FOCUS	INTERPUPILLARY DISTANCE	WEIGHT	HEIGHT X WIDTH
10x42 mm	42 mm	16.1 mm	6.1 °	319 ft	13.1 ft	56-76 mm	20.8 oz	5.7x5.0"
8x42 mm	42 mm	17.9 mm	7.1 °	371 ft	13.1 ft	56-76 mm	20.8 oz	5.7x5.0"

## PRODUCT FEATURES



Long Eye Relief, Close Focus, Twist Up Eye-Cups, Tripod Adaptable, Nitrogen Purged

BEST USED FOR

VISIT THE PRODUCT PAGE





NEOS G2 HD  
BINOCULARS



10 x 42 mm / 8 x 42 mm

We build optics to withstand the elements, no matter what class of binos they are in. We figure if you spend any time outdoors you will be near water, and your equipment might spend some time in it. The Neos G2 series of weatherproof binoculars are built tough, with a composite chassis that's O-ring sealed and nitrogen purged for 100% waterproof/fog-proofing. So, if you run into foul weather or take spill in a mountain stream, your Neos G2 binos are ready for it. Rubber armor gives you a grip in slippery situations. Fully Multi-coated optics and premium-quality BaK-4 prism glass maximize light transmission and image clarity.

PRODUCT SPECIFICATION

MODEL	OBJECTIVE LENS DIAMETER	EYE RELIEF	FIELD OF VIEW ANGULAR	FOV @1000 YARDS	CLOSE FOCUS	INTERPUPILLARY DISTANCE	WEIGHT	HEIGHT X WIDTH
10x42 mm	42 mm	14.1 mm	5.9 °	309 ft	13.1 ft	56-72 mm	21 oz	5.9x4.9"
8x42 mm	42 mm	17 mm	7.0 °	367 ft	13.1 ft	56-72 mm	21 oz	5.9x4.9"

PRODUCT FEATURES



Long Eye Relief, Close Focus, Twist Up Eye-Cups, Tripod Adaptable, Nitrogen Purged

VISIT THE  
PRODUCT  
PAGE



BEST  
USED  
FOR







# RIFLESCOPES



22-55



# CRONUS BTR GEN2 UHD / HD

RIFLESCOPES



1-6x24 SFP



4.5-29x56 FFP

A titan in long range precision. Poor weather and low light conditions are no match for UHD extra-low dispersion lenses. Cut through mirage and leave the competition in the dust. From precision shooting to the most demanding hunt, the Cronus BTR GEN2 is up to the challenge. The next generation of the Cronus BTR is now equipped with our applauded internal stainless-steel component turret design producing sharp, loud, tactile clicks.

## PRODUCT SPECIFICATION




POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YARDS	WEIGHT	LENGTH
1-6x24 SFP	Exposed & Locking	30 mm	ATSR2 SFP IR MOA	Matte	3.6- 4.0"	106.9- 17.7 ft	18.8 oz	10.4"
			APLR5 FFP IR MOA					
4.5-29x56 FFP	Exposed	34 mm	APRS6 FFP IR MIL	Matte	3.6- 3.8"	24.8- 3.83 ft	35.8 oz	14.4"
			APRS1 FFP IR MIL					

## PRODUCT FEATURES

\* only 4.5-29x56 | \*\* only 1-6x24



Argon Purged, High Precision Erector System, Aircraft Grade Aluminum Tube, Side Parallax Adjustment, Illuminated Glass Reticles, Exposed Turrets, Waterproof

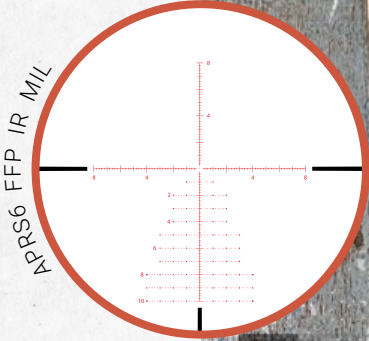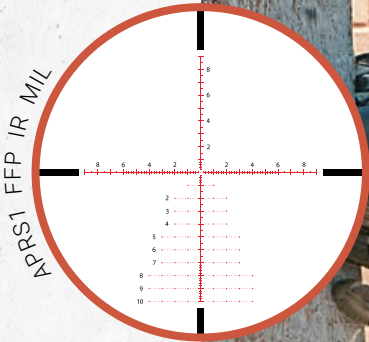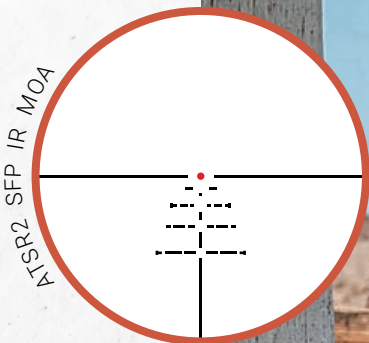

BEST  
USED  
FOR



VISIT THE  
PRODUCT  
PAGE





ARES ETR UHD  
RIFLESCOPES

RIFLESCOPES

ARES ETR UHD

athlonoptics.com



1-10x24 FFP

The latest in our growing line of Low-Power Variable Optics, this First Focal Plane LPVO is unmatched in versatility and quality. Whether hunting in thick brush, taking 600-yard shots over a bean field, or tearing up a 3-gun stage, the incredible field of view on 1x paired with the long-range capability of 10x is ready for any task. Take confidence with a precision zero stop and locking elevation turret/capped windage turret, ensuring you never lose zero.

PRODUCT SPECIFICATION

\* Exposed - Elevation Turret / Capped - Windage Turret

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YARDS	WEIGHT	LENGTH
1-10x24 FFP	*Exposed/ Capped	34 mm	ATMR2 FFP IR MOA ATMR3 FFP IR MIL	Matte	3.7"	117.3- 11.7 ft	26.9 oz	10.0"

PRODUCT FEATURES

\*\* Zero Stop and Locking - Elevation Turret



High Precision Erector System, Aircraft Grade Aluminum Tube, XPL Coating, Illuminated Glass Reticles, Exposed/Capped Turrets, Waterproof


1X - ATMR3 FFP IR MIL



10X - ATMR3 FFP IR MIL



ATMR2 FFP IR MOA

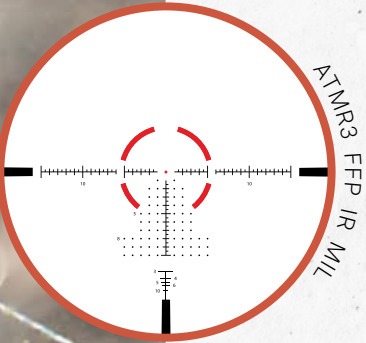

ATMR3 FFP IR MIL

VISIT THE  
PRODUCT  
PAGE



BEST  
USED  
FOR







# ARES ETR UHD

RIFLESCOPES



The Ares ETR First Focal Plane scope is loaded with features that will allow you to take your long range shooting to another level. Featuring a stainless steel turret system, the Ares ETR has the most tactile clicks and a true zero stop on the elevation turret to make sure your turrets and shots are right on every time. A locking feature is equipped on windage turret. Extra Low dispersion lenses allow for the sharpest and best color image possible. Constructed with an 34mm tube, this riflescope can withstand even the harshest of elements.

### PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YARDS	WEIGHT	LENGTH
3-18x50 FFP	Exposed & Locking	34 mm	APLR6 FFP IR MOA	Matte	3.74"	39.2- 6.65 ft	31.4 oz	14.2"
			APRS6 FFP IR MIL					
			APLR2 FFP IR MOA					
4.5-30x56 FFP	Exposed & Locking	34 mm	APLR5 FFP IR MOA	Matte/ *Brown	3.9"	24.5- 3.75 ft	36.5 oz	15.3"
			APRS1 FFP IR MIL					
			APRS6 FFP IR MIL					

### PRODUCT FEATURES

\* Locking Feature on Windage only



\* High Precision Erector System, Aircraft Grade Aluminum Tube, Side Parallax Adjustment, XPL Coating, Illuminated Glass Reticles, Exposed Turrets, Waterproof

VISIT THE  
PRODUCT  
PAGE

BEST  
USED  
FOR





# ARES BTR GEN2 HD

RIFLESCOPES



2.5-15x50 FFP



4.5-27x50 FFP

Built off the success of the 1st generation Ares BTR, the GEN2 is still a top-tier riflescope, without the price tag. The Ares BTR GEN2 acquires a new stainless steel turret design, just like the Midas TAC and Ares ETR lines. The new turret design features sharper, more tactile clicks. Featuring HD glass, a new optical system provides an even brighter and clearer image throughout the magnification range. A one-piece, precision machined aircraft grade aluminum scope body, precision zero stop, and impeccable tracking will deliver precise, accurate results in any field.



## PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YARDS	WEIGHT	LENGTH
2.5-15x50 FFP	Exposed	30 mm	APLR4 FFP IR MOA	Matte	3.9"	41.8- 6.8 ft	27.3 oz	13.8"
			APRS5 FFP IR MIL					
4.5-27x50 FFP	Exposed	30 mm	APLR4 FFP IR MOA	Matte	3.9"	22.7- 3.8 ft	27.3 oz	13.8"
			APRS5 FFP IR MIL					

## PRODUCT FEATURES



High Precision Erector System, Aircraft Grade Aluminum Tube, Side Parallax Adjustment, Illuminated Glass Reticles, Exposed Turrets, Waterproof

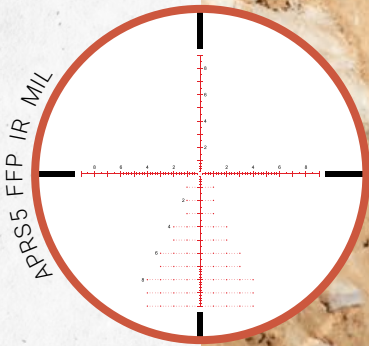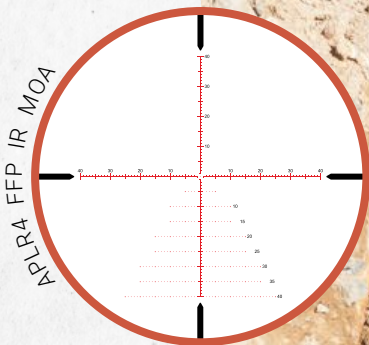

BEST  
USED  
FOR



VISIT THE  
PRODUCT  
PAGE








# MIDAS TAC HD


RIFLESCOPES




APLR4 FFP MOA

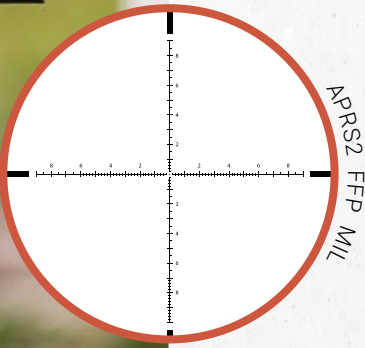

APRS2 FFP MIL

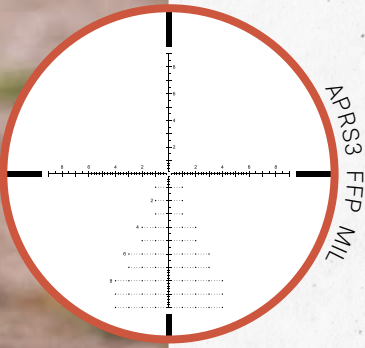

APRS3 FFP MIL

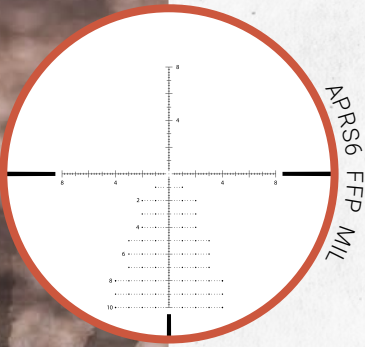

APRS6 FFP MIL



4-16x44 FFP



5-25x56 FFP



6-24x50 FFP

Here at Athlon Optics we have listened to your feedback and suggestions and developed the Midas TAC. Loaded with features including HD Glass, Advanced Fully Multi-Coated lenses to enhance target appearance at all distances, a hard Zero Stop for repeatability and Capped Windage Turret to prevent accidental adjustments. This is not just another option, but the solution!

## PRODUCT SPECIFICATION

\* Exposed - Elevation Turret / Capped - Windage Turret

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YARDS	WEIGHT	LENGTH
4-16x44 FFP	*Exposed/ Capped	30 mm	APRS2 FFP MIL	Matte	3.7"	27.7- 7 ft	23.8 oz	14.2"
5-25x56 FFP	*Exposed/ Capped	34 mm	APLR4 FFP MOA	Matte	3.7"	22.1- 4.5 ft	30.0 oz	15.1"
			APRS3 FFP MIL					
			APRS6 FFP MIL					
6-24x50 FFP	*Exposed/ Capped	30 mm	APLR4 FFP MOA	Matte	3.7"	17.8- 4.6 ft	26.3 oz	14.6"
			APRS2 FFP MIL					
			APRS3 FFP MIL					

## PRODUCT FEATURES



Aircraft Grade Aluminum, Side Parallax Adjustment, Non-Illuminated Glass Reticles, Waterproof

VISIT THE  
PRODUCT  
PAGE

BEST  
USED  
FOR



MIDAS HMR HD  
RIFLESCOPES

MIDAS HMR HD



2.5-15x50 SFP

Attention all hunters, attention all hunters! We have great news for you! We would like to introduce the Midas HMR Second Focal Plane riflescope line made by hunters, for hunters.

Featuring HD glass and Advanced Fully Multi-Coated optics deliver crisp bright images for taking a shot, short or long. This one piece tube, precision-machined from aircraft grade aluminum will deliver precise, accurate results all day long. Both elevation and windage turrets are capped to make sure nothing gets bumped after you set your zero. You can always count on it to deliver the final punch.


PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YARDS	WEIGHT	LENGTH
2.5-15x50 SFP	Capped	30 mm	AHMR SFP IR MOA BDC 600A	Matte	3.9"	41.8- 6.8 ft	26 oz	13.8"

PRODUCT FEATURES



Aircraft Grade Aluminum Tube,  
Side Parallax Adjustment,  
Illuminated Glass Reticles

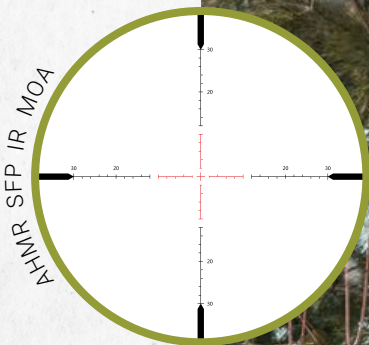

BEST  
USED  
FOR



VISIT THE  
PRODUCT  
PAGE







# MIDAS BTR GEN2 HD

RIFLESCOPES




ATSR16 SFP IR MOA



ATSR4 SFP IR MOA



AHMR SFP IR MOA

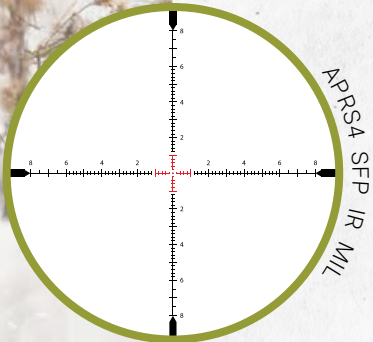

APRS4 SFP IR MIL



1-6x24 SFP



4.5-27x50 SFP

This second focal plane variable power scope will be the perfect optic for you regardless of whether or not you are shooting small targets at a few hundred yards, shooting 3-gun matches, or hunting big game anywhere in the world, this will be the perfect option for you.

With new and improved tactile turrets, a true zero stop, and updated reticle designs; you won't find a better option on the market for any of your applications. HD glass equipped with our Advanced Fully Multi-Coated lenses so you'll have the brightest, clearest image possible in any situation. The innovative XPL coating protects your lenses from oil, dirt and smudges.

## PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YARDS	WEIGHT	LENGTH
1-6x24 SFP	Capped	30 mm	ATSR16 SFP IR MOA	Matte	3.8"	108- 17.6 ft	18.1 oz	10.6"
			ATSR4 SFP IR MOA					
4.5-27x50 SFP	Exposed	30 mm	AHMR SFP IR MOA APRS4 SFP IR MIL	Matte	3.9"	22.7- 3.6 ft	26.0 oz	13.8"

## PRODUCT FEATURES



Aircraft Grade Aluminum Tube, High Precision Erector System, Side Parallax Adjustment, Illuminated Glass Reticles, Capped/Exposed Turrets, Waterproof

VISIT THE  
PRODUCT  
PAGE



BEST  
USED  
FOR





# HELOS BTR / GEN2

RIFLESCOPES



1-10x28 GEN2 SFP



1-4.5x24 SFP

The Helos BTR GEN2 1-10x28 is a second focal plane option for tactical shooters looking for the latest trend in optics at an affordable price. Accurately assess and engage silhouette-sized targets out to 700 yards using 68 or 69 gr .223/5.56 Nato cartridges with the ATMR4 SFP IR MOA reticle.

The Helos BTR 1-4.5x24 is specially designed for service rifle matches and AR platforms with short and mid-range applications in mind. A revolution locking feature limits the Up Adjustment of your elevation turret within one revolution from your zero position, while still providing total 23 MOA adjustment from zero, ideal for 600 targets. This feature eliminates any second-guessing which turn you are at on your elevation turret.

### PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YARDS	WEIGHT	LENGTH
1-10x28 SFP	Capped	34 mm	ATMR4 SFP IR MOA	Matte	3.2"	110-10 ft	18.3 oz	10.3"
1-4.5x24 SFP	Exposed	30 mm	ATSR3 SFP IR MOA	Matte	3.2"	100-22 ft	22.9 oz	9.5"

### 1-10X28 PRODUCT FEATURES





Second Focal Plane, High Precision Erector System, 30mm Tubes, Illuminated Glass Reticles, Capped Turrets

### 1-4.5X24 PRODUCT FEATURES



Revolution Lock, Second Focal Plane, High Precision Erector System, 30mm Tubes, Illuminated Glass Reticles, Exposed Turrets, Side Parallax Adjustment

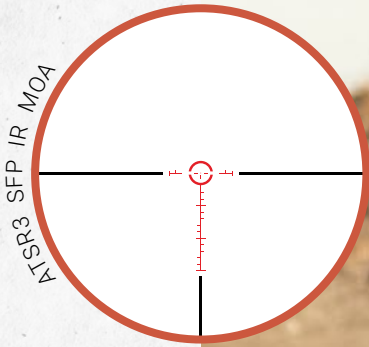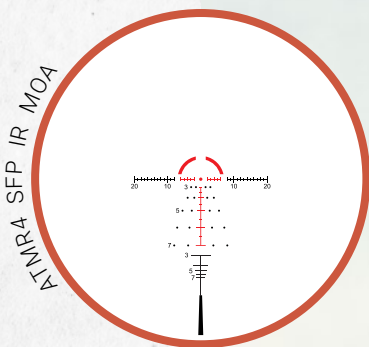

BEST  
USED  
FOR



VISIT THE  
PRODUCT  
PAGE









# HELOS BTR GEN2

RIFLESCOPIES



2-12x42 FFP

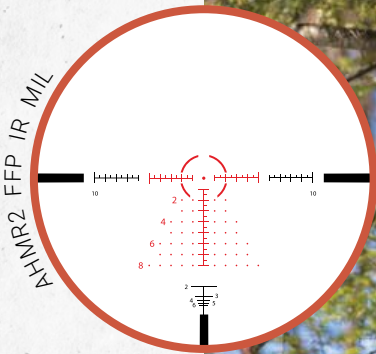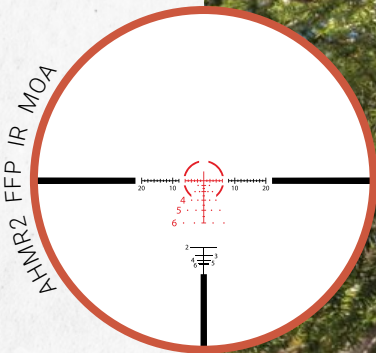

All the attributes of an ideal designated marksman rifle scope, with features equally suitable for the modern hunter or an operators DMR. Ideal for anyone looking for solution to short range and mid-range applications, whether you dial or holdover. First Focal Plane MOA and MIL based reticles are always valid at any magnification. Robustly built with fool-proof turret features and a protective XPL lens coating, the Helos BTR GEN2 2-12x is ready to deploy in any field.

## PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YARDS	WEIGHT	LENGTH
2-12x42 FFP	Exposed & Locking	30 mm	AHMR2 FFP IR MOA AHMR2 FFP IR MIL	Matte	3.6"	55.7- 9.6 ft	25.4 oz	11.8"

## PRODUCT FEATURES



First Focal Plane, High Precision Erector System, Side Parallax Adjustment, 30 mm Tubes, Illuminated Glass Reticles, Exposed Turrets, Waterproof



BEST  
USED  
FOR



VISIT THE  
PRODUCT  
PAGE





# HELOS BTR GEN2

RIFLESCOPES



4-20x50 FFP



6-24x56 FFP

Affordable, solid, and reliable are seldom associated with long range shooting and hunting. The Helos BTR GEN2 is the exception. Advanced Fully Multi-Coated lenses and XPL coatings balance out this optic for a wide variety of conditions. Cross-over features such as Locking turrets are not just for hunting, they instill confidence in mid to long range shooters as well.


### PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YARDS	WEIGHT	LENGTH
4-20x50 FFP	Exposed & Locking	30 mm	APLR6 FFP IR MOA APRS6 FFP IR MIL	Matte	3.6"	27.9- 5.6 ft	27.6 oz	13.3"
6-24x56 FFP	Exposed & Locking	34 mm	APLR6 FFP IR MOA APRS6 FFP IR MIL	Matte	3.7"	19.9- 5.12 ft	34.5 oz	14.3"

### PRODUCT FEATURES



First Focal Plane Reticle, High Precision Erector System, Side Parallax Adjustment, 30 mm Tubes, Illuminated Glass Reticles, Exposed Turrets, Waterproof

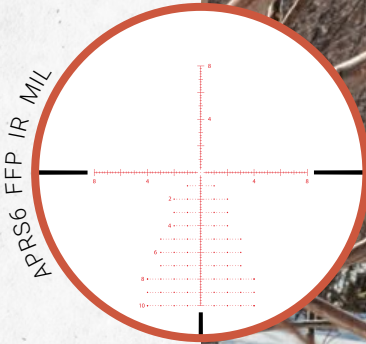

BEST  
USED  
FOR



VISIT THE  
PRODUCT  
PAGE







1-8x24 SFP



Our entry into LPVOs, the Argos BTR GEN2 1-8x is a very versatile tool for multigunners, hunters, and those in the market for a self defense optic. Whether you are expecting close engagement with wild hogs, or burning up ammo at the local range, a reliable close-range scope with the ability to engage targets mid-range is something no one should be without. The ATSR5 reticle provides quick target acquisition at close range and holdovers out to 600 yards using 68 and 69 grain BTHP 223 Rem/5.56mm NATO rounds.

PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YARDS	WEIGHT	LENGTH
1-8x24 SFP	Capped	30 mm	ATSR5 SFP IR MOA	Matte	3.5"	110- 14.5 ft	16.1 oz	9.8"

PRODUCT FEATURES




Second Focal Plane Reticle, High Precision Erector System , Illuminated Glass Reticles, Waterproof

1X - ATSR5 SFP IR MOA



8X - ATSR5 SFP IR MOA

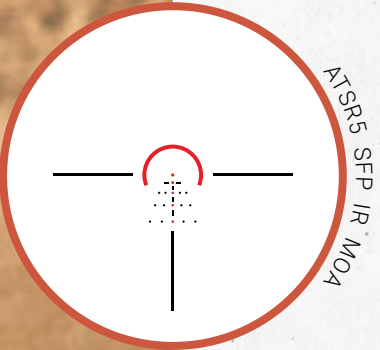

VISIT THE  
PRODUCT  
PAGE



BEST  
USED  
FOR







# ARGOS BTR GEN2

RIFLESCOPES



APLR2 FFP IR MOA



APMR FFP IR MIL



BLR SFP MOA



6-24x50 FFP



8-34x56 FFP



10-40x56 SFP

A precision long range optic with features normally found on high-end riflescopes. The Argos BTR GEN2 is designed for precision shooting on a budget. Advanced Fully Multi-Coated Optics deliver a clear bright image in low-light environments. The GEN2 now features Athlon's Precision Zero Stop System, for a quick-hard stop when returning to zero. It also features turrets with sharper, more tactile clicks.

## PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YARDS	WEIGHT	LENGTH
6-24x50 FFP	Exposed	30 mm	APLR2 FFP IR MOA APMR FFP IR MIL	Matte	3.3"	16.7- 4.5 ft	30.3 oz	14.1"
8-34x56 FFP	Exposed	30 mm	APLR2 FFP IR MOA APMR FFP IR MIL	Matte	3.3"	12.5- 3 ft	32.0 oz	15.5"
10-40x56 SFP	Exposed	30 mm	BLR SFP MOA	Matte	3"	12.6- 3.1 ft	31.8 oz	16.3"

## PRODUCT FEATURES



First/Second Focal Plane Reticle, High Precision Erector System, Side Parallax Adjustment, Illuminated Glass Reticles, Waterproof

VISIT THE  
PRODUCT  
PAGE



BEST  
USED  
FOR







# ARGOS HMR

RIFLESCOPES



2-12x42 SFP

4-20x50 SFP

The Argos HMR is designed from the ground up, with the average outdoorsman in mind. This compact and durable hunting scope is a feature-rich, yet affordable option. 5x and 6x magnification ratios are ideally suited for a wide variety of close- and long-range hunting. Advanced Fully Multi-Coated lenses paired with clean and concise reticles like an illuminated center-dot crosshair, Mil-Dot, or BDC reticle options for a fool-proof traditional setup.


### PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YARDS	WEIGHT	LENGTH
2-12x42 SFP	Capped	1 in	BDC 600	Matte	3.6"	55.7- 9.6 ft	19.8 oz	11.8"
			BDC 600A					
			AHMC SFP MOA					
4-20x50 SFP	Capped	1 in	BDC 600A	Matte	3.6"	27.9- 5.6 ft	21.0 oz	13.2"
			AHMC SFP MOA					
			MIL-DOT					

### PRODUCT FEATURES



Second Focal Plane, Aircraft  
Grade Aluminum - 1 inch  
Tubes, Capped Turrets,  
Illuminated Glass Reticles

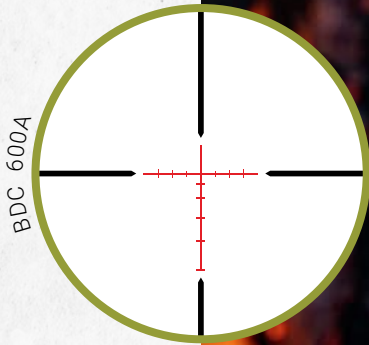


BEST  
USED  
FOR



VISIT THE  
PRODUCT  
PAGE





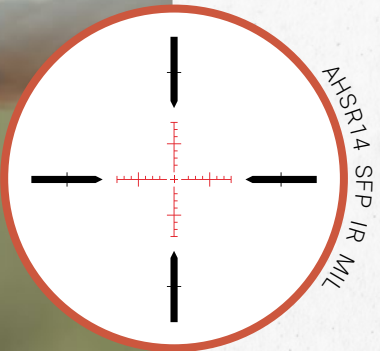

1-4x24 SFP



4-14x44 FFP

The Talos BTR is available in two configurations; 4-14x44 - First Focal Plane or 1-4x24 Second Focal Plane. Both of these scopes are great entry level scopes for competitive and tactical shooting. Featuring Multi-Coated lenses for clarity and brightness in low light conditions as well as being waterproof, this family is ready to get you started shooting.

PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YARDS	WEIGHT	LENGTH
1-4x24 SFP	Exposed	30 mm	AHSR14 SFP IR MIL	Matte	6.26- 3.5"	110- 26 ft	18 oz	9.2"
4-14x44 FFP	Exposed	30 mm	APLR2 FFP IR MIL	Matte	3.23- 3.15"	27.2- 7.9 ft	23.6 oz	12.9"

PRODUCT FEATURES





Side Parallax Adjustment,  
Illuminated Glass Reticles,  
Exposed Turrets, First/Second  
Focal Plane







TALOS  
RIFLESCOPES

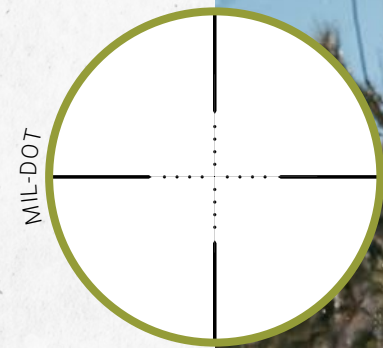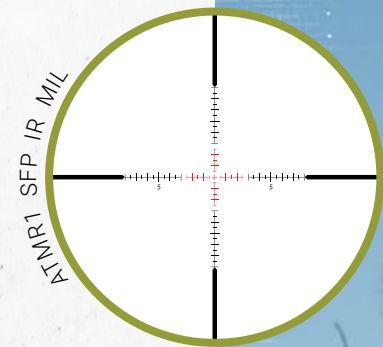

If you ask any hunter they'll tell you they have probably filled more tags in the low-light hours than any other time. The Talos scope with Fully Multi-Coated lenses for clarity and brightness in low light, you'll be able to add precious minutes to every hunting day that you've worked so hard for. These scopes, with their 4X magnification range, will give you great versatility whether you are hunting whitetails in the dense forest or prairie dogs in the wide open ranges. With its one-piece tube design, the Talos line includes an assortment of specialty scopes for big-game, varmint, MSR's, 22 rimfire, slug, black powder and turkey hunting.

PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YARDS	WEIGHT	LENGTH
3-12x40 SFP	Capped	1 in	BDC 600 IR	Matte	3.82- 3.35"	34.1 - 8.9 ft	16.2 oz	12"
			CENTER X					
			MIL-DOT					
4-16x40 SFP	Capped	1 in	BDC 600 IR	Matte	3.8- 3.35"	24.1 - 6.3 ft	19.1 oz	12.9"
			MIL-DOT					
6-24x50 SFP	Capped	1 in	BDC 600 IR	Matte	3.11- 3.03"	16.8 - 4.5 ft	23 oz	13.9"
			ATMR1 SFP IR MIL					

PRODUCT FEATURES



Side Parallax Adjustment,  
6063 Aluminum - 1 inch  
Tubes, Illuminated Glass  
Reticles, Capped Turrets,  
Second Focal Plane

BEST  
USED  
FOR

VISIT THE  
PRODUCT  
PAGE





3-9x40 SFP



4-12x40 SFP



6-18x44 SFP

Increasing your success while hunting doesn't necessarily have to decrease your savings account. The perfect example of that is the Neos series. This is the perfect scope for those who want quality and features all while staying on budget. The Neos has an impressive list of features which are designed and built to endure. It has a one piece aluminum tube. The lenses are Fully Multi Coated. Some of the models even have the latest side parallax focus technology. What about the cost? Let's just say the scope isn't the only thing that looks good, with ruggedness and precision we are proud of!

PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YARDS	WEIGHT	LENGTH
3-9x40 SFP	Capped	1 in	CENTER X	Matte	2.99- 3.07"	37.8- 12.6 ft	17 oz	12.4"
			BDC 500 IR					
			BDC 22 RIM FIRE					
4-12x40 SFP	Capped	1 in	CENTER X	Matte	3.11- 3.15"	27.3- 8.9 ft	18.1 oz	12.4"
			BDC 500 IR					
			BDC 22 RIM FIRE					
6-18x44 SFP	Capped	1 in	CENTER X	Matte	3.39- 3.19"	17.5- 5.9 ft	21.7 oz	13.5"
			BDC 500 IR					

PRODUCT FEATURES



Second Focal Plane Reticle,  
Side Parallax Adjustment,  
6063 Aluminum - 1 inch  
Tubes, Illuminated Glass  
Reticles, Capped Turrets





# SPOTTING SCOPES


56-65







ARES G2 UHD  
SPOTTING SCOPES

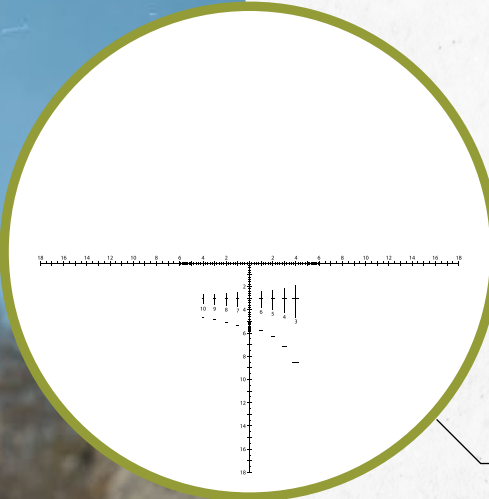

TSSR2 SFP MIL



22X Reticle Eyepiece



15-45x65 mm



15-45x65 mm

Raising the bar for versatility in a spotting scope, the Ares G2 UHD 15-45x65 is an exceptionally useful tool in the outdoor enthusiasts’ arsenal. Compact and light enough for long treks through rugged terrain with clarity and magnification for long range viewing. Pair with the optional ranging reticle eyepiece to accurately estimate game or make calls for your buddy at the range.

PRODUCT SPECIFICATION

POWER X OBJ. LENS	EYEPIECE ANGLE	EYE RELIEF	CLOSE FOCUS	FOV @1000 YARDS	WEIGHT	LENGTH X WIDTH
15-45x65 G2 UHD	45 Degree	0.75"-0.63"	13.1 ft	171 - 81 ft	45.9 oz	11.9x3.0"
15-45x65 G2 UHD	Straight	0.75"-0.63"	13.1 ft	171 - 81 ft	49.3 oz	13.5x3.0"
22X Reticle Eyepiece	45 Degree/Straight	0.78"	13.1 ft	143 ft	8.0 oz	2.75x2.0"

PRODUCT FEATURES



BaK4 Prisms, Magnesium Chassis, Waterproof, Dual Focus, Rotating Ring, Twist Up Eye-Cup, Tripod Adaptable

VISIT THE  
PRODUCT  
PAGE



BEST  
USED  
FOR







# ARES G2 UHD

SPOTTING SCOPES



When details matter, look no further than the 20-60x85 Ares G2 UHD. Whether you are a birder looking for variances in plumage, or a precision shooter spotting impacts at 1,000 yards the extra-low dispersion glass provides vivid clarity and resolution in a full-size spotting scope.

## PRODUCT SPECIFICATION

POWER X OBJ. LENS	EYEPIECE ANGLE	EYE RELIEF	CLOSE FOCUS	FOV @1000 YARDS	WEIGHT	LENGTH X WIDTH
20-60x85 UHD	45 Degree	0.77"-0.70"	39.4 ft	99 - 47 ft	70.0 oz	16.9x4.0"
20-60x85 UHD	Straight	0.77"-0.70"	39.4 ft	99 - 47 ft	68.9 oz	16.9x4.0"

## PRODUCT FEATURES



BaK4 Prisms, Magnesium Chassis, Waterproof, Dual Focus, Rotating Ring, Twist Up Eye-Cup, Tripod Adaptable



BEST  
USED  
FOR



VISIT THE  
PRODUCT  
PAGE







# ARGOS HD

SPOTTING SCOPES

With HD Glass      Without HD Glass



20-60x85 mm



20-60x85 mm

We designed the Argos family of spotting scopes with good optical quality and ease of use in mind. The Argos spotting scope features our wind band fully multi-coated lenses and porro prisms with phased coating. They bring great clarity and brightness within the reach of all enthusiasts. The light-weight composite chassis protected by rubber armor is fog proof, waterproof, and filled with nitrogen gas to prevent internal fogging and promote better thermal stability. The product comes with a specially designed soft case allowing you to mount the spotting scope on a tripod and use it with the soft case on it all the time.

## PRODUCT SPECIFICATION

POWER X OBJ. LENS	EYEPIECE ANGLE	EYE RELIEF	CLOSE FOCUS	FOV @1000 YARDS	WEIGHT	LENGTH X WIDTH
20-60x85 HD	45 Degree	0.77"-0.70"	39.4 ft	102 - 48 ft	70.0 oz	16.9x4.0"
20-60x85 HD	Straight	0.77"-0.70"	39.4 ft	102 - 48 ft	68.9 oz	16.9x4.0"

## PRODUCT FEATURES



Composite Chassis, Fog Proof, Rotating Ring, Twist Up Eye-Cup, Tripod Adaptable

VISIT THE  
PRODUCT  
PAGE



BEST  
USED  
FOR



SPOTTING SCOPES

ARGOS HD

athlonoptics.com



TALOS

SPOTTING SCOPES



We designed the Talos family of spotting scopes with good optical quality and ease of use in mind. The Talos spotting scope features our fully multi-coated lenses and K9 prisms with silver coating. They bring great clarity and brightness within the reach of all enthusiasts. The light-weight composite chassis is fog proof, waterproof, and filled with nitrogen gas to prevent internal fogging and promote better thermal stability. The product comes with a table-top tripod and soft case allowing you to carry the spotting scope and tripod in one package.

PRODUCT SPECIFICATION

POWER X OBJ. LENS	EYEPIECE ANGLE	EYE RELIEF	CLOSE FOCUS	FOV @1000 YARDS	WEIGHT	LENGTH X WIDTH
20-60x80	45 Degree	0.70"-0.60"	19.7 ft	82.9 - 48 ft	38.5 oz	16.5x3.75"



PRODUCT FEATURES




Composite Chassis, Fog Proof, Rotating Ring, Twist Up Eye-Cup, Tripod Adaptable



BEST USED FOR



VISIT THE PRODUCT PAGE





66-73



# RED DOT SIGHTS



50 K  
HOURS  
BATTERY LIFE

MIDAS  
RED DOT SIGHTS




RED DOT SIGHTS

NEW

MIDAS

athlonoptics.com



TSR1 / TSR2 / TSR3



LE-GEN2 (Interchangeable)



Midas TSR2



Midas TSR1

NEW



Midas TSR3



Midas LE GEN2

The speed and versatility of a Red Dot goes unmatched in close range engagements. Whether you are running an AR or PCC in competition, hunting, or running a Red Dot on an optics ready pistol, the TSR series of Red Dots has you covered. With 50,000 hours of battery life and motion sensor activation, the TSR series is always ready.

PRODUCT SPECIFICATION

\* LE-GEN2 Interchangeable reticle - see page 93

AVAILABLE MODELS	OBJECTIVE LENS	MAGNIFICATION	PARALLAX	AVAILABLE DOT RETICLES	IR COLOR	IR SETTING	CENTER HEIGHT	CLICK VALUE	BATTERY	WEIGHT	LENGTH
TSR1	24x17 mm	1X	0 MOA	TSR1	Red	1-10	0.96"	1 MOA	CR2032	2.8 oz	1.88"
TSR2	20 mm	1X	<1 MOA	TSR2	Red	1-13	*1.59"	0.5 MOA	AAA	6.7 oz	2.79"
TSR3	36 mm	1X	<1 MOA	TSR3	Red	1-13	1.39"	0.5 MOA	CR2032	10.6 oz	3.73"
LE GEN2	26x35 mm	1X	0 MOA	LE-GEN2*	Red	1-6	1.26"	0.5 MOA	CR2032	6.9 oz	3.40"

PRODUCT FEATURES



Adjustable Illumination Settings, Aircraft Aluminum, One Piece Chassis Construction, Fog Proof, Shockproof, Picatinny Rail Mount

VISIT THE  
PRODUCT  
PAGE



BEST  
USED  
FOR







Midas TSP1

Midas TSP3

Midas TSP4

Quickly acquire and transition between targets at short and medium ranges with Athlon's prism scopes. Additional magnification offers greater versatility over traditional red dots. User-selectable red and green illumination matches conditions and shooter preferences, while etched reticles provide a foolproof aiming option when your battery runs out. The prism-based design allows for a more compact scope with a crisp and vivid image.

PRODUCT SPECIFICATION

\*User selectable red/green illumination, black reticle (off)

AVAILABLE MODELS	OBJECTIVE LENS	MAGNIFICATION	FOV @100 YARDS	AVAILABLE RETICLES	RETICLE COLOR	CENTER HEIGHT	CLICK VALUE	BATTERY	WEIGHT	LENGTH
TSP1	21 mm	1X	66 ft	TSP1	*Red/Green	0.88"L/ 1.49"H	1 MOA	AAA	6.25 oz	2.70"
TSP3	28 mm	3X	34 ft	TSP3	*Red/Green	1.39"	0.5 MOA	CR2032	16.0 oz	5.1"
TSP4	30 mm	3.9X	9 ft	TSP4	*Red/Green	1.39"	0.5 MOA	CR2032	16.8 oz	5.7"

PRODUCT FEATURES



Adjustable Illumination Settings, Aircraft Aluminum, One Piece Chassis Construction, Fog Proof, Shockproof, Picatinny Rail Mount, Auto power shut-off (6 hours), Capped Turrets





NEW



Midas M3 -with flip mount

NEW



Midas M5 - with flip mount

Many times when in the field or during competitions you need to transition between no magnification for speed in close-range combat and magnification for precision shooting as situation dictates.

The Athlon 3 or 5 power magnifier mounts behind a traditional red-dot sight to provide magnification when needed. The mount has the ability to swing out of the way when not in use, but can quickly be placed behind the Red Dot to increase the magnification for longer mid-range shots. Rugged construction. Multi-coated lenses and 30mm tube for excellent light transmission. Nitrogen purged, shockproof, waterproof, and fogproof.

PRODUCT SPECIFICATION

\* Center height with flip mount

AVAILABLE MODELS	OBJECTIVE LENS	MAGNIFICATION	FOV @100 YARDS	EYE RELIEF	WEIGHT	LENGTH	*CENTER HEIGHT
M3	23.5 mm	3X	38.3 ft	2.7"	10.5 oz	2.9"	1.42"
M5	27.2 mm	5X	23.0 ft	2.5"	11.6 oz	3.7"	1.42"

PRODUCT FEATURES



Fog Proof, Shockproof, One Piece Chassis Construction, Aircraft Grade Aluminum, Flip Mount







# RANGEFINDERS


74-79





# MIDAS 1 MILE

RANGEFINDERS

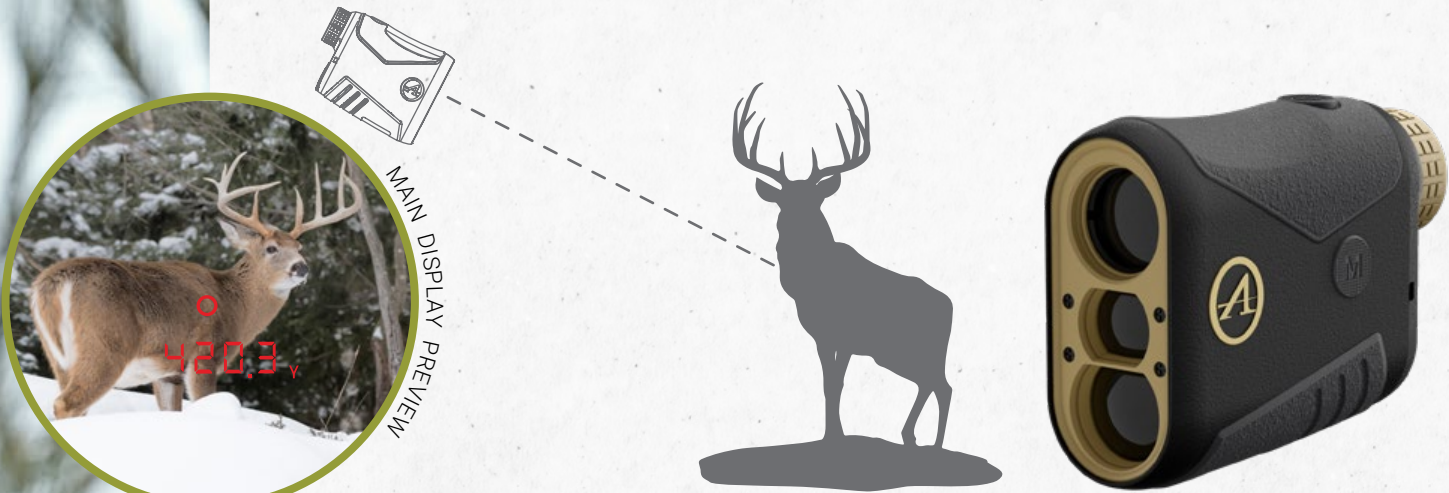

Midas 1 MILE

After a brutal hike or a long sit in the tree stand, it all comes down to one shot. Don't misjudge your distance, you've come too far to miss now. Use the scan mode to quickly scan the field from 5 yards to 1 mile. Displays distances in yards or meters and 3 different ranging modes: Horizontal (line of sight), Vertical and Angle compensated. Waterproofing and non-slip grip Rubber Armor protect the Midas 1 Mile on the toughest hunts.

## RANGING MODES TO CHOOSE FROM

INCLINE ANGLE (T) MODE	Displays the incline angle of your position to the target.
HORIZONTAL DISTANCE (H) MODE	Displays the angle compensated distance to the target. This is the primary mode used by most hunters (Both bow and rifle).
VERTICAL DISTANCE (V) MODE	Displays the vertical distance of your position to the target.

## PRODUCT SPECIFICATION

RANGING REFLECTIVE	RANGING DEER	ACCURACY	MAX ANGLE READING	MAGNIFICATION	OBJ. LENS DIAMETER	FOV	EYE RELIEF	POWER SUPPLY
1760 Y	800 Y	±0.5Y	±70°	6X	21mm	6°	15mm	CR2-3V

## PRODUCT FEATURES



Tripod Adaptable, Scan Mode, Dual Units of Measurement of Distance (Y/M), Angle Compensation Mode, Diopter Adjustment

VISIT THE  
PRODUCT  
PAGE



BEST  
USED  
FOR







RANGEFINDERS

# TALOS 800Y

RANGEFINDERS



Talos 800Y - BROWN



Line of Sight - 35.7 yds



MAIN DISPLAY PREVIEW



Take to the field with confidence in your next shot. The Athlon Talos laser rangefinder brings affordability to the average hunter. Accurately ranges deer-sized game from 6 to 300 yards and reflective targets out to 850 yards. Regardless of terrain, get an accurate range estimate in yards or meters. The Talos range finder can provide a true line-of-sight measurement or an angle compensated distance when shooting from elevated positions.

## RANGING MODES TO CHOOSE FROM

INCLINE ANGLE (T) MODE	Displays the incline angle of your position to the target.
HORIZONTAL DISTANCE (H) MODE	Displays the angle compensated distance to the target. This is the primary mode used by most hunters (Both bow and rifle).
VERTICAL DISTANCE (V) MODE	Displays the vertical distance of your position to the target.

## PRODUCT SPECIFICATION

RANGING REFLECTIVE	RANGING DEER	ACCURACY	MAX ANGLE READING	MAGNIFICATION	OBJ. LENS DIAMETER	FOV	EYE RELIEF	POWER SUPPLY
800 Y	300 Y	±1Y	±70°	6X	21 mm	7°	14 mm	CR2-3V

## PRODUCT FEATURES



Tripod Adaptable, Scan Mode, Dual Units of Measurement of Distance (Y/M), Angle Compensation Mode, Diopter Adjustment



BEST USED FOR



VISIT THE PRODUCT PAGE






# COMPARISON TABLE

## RIFLESCOPES

The following table contains detailed specifications of all Athlon Optics riflescopes allowing you to compare them easily and find the right one for you.

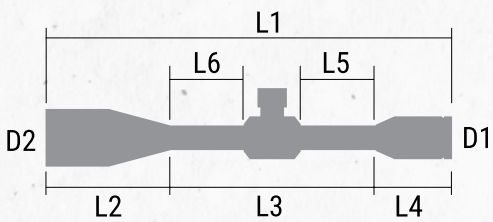


POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	EYE RELIEF	FOV @100 YARDS	WEIGHT	CLICK VALUE	ADJ. PER ROTATION	TOTAL ELEVATION ADJ.	TOTAL WINDAGE ADJ.	PARALLAX ADJ.	PURGING MAT.	DIMENSIONS								
													L1	L2	L3	L4	L5	L6	D1	D2	
CRONUS BTR GEN2 *UHD / HD																					
1-6x24 SFP	Exposed & Locking	30 mm	ATSR2 SFP IR MOA	3.6-4.0"	106.9-17.7 ft	18.8 oz	0.5 MOA	32 MOA	120 MOA	120 MOA	Fixed 100 yds	Argon	10.4" /	6.9"	3.5"	2.0"	3.6"	1.7"	1.2"		
*4.5-29x56 FFP	Exposed	34 mm	APLR5 FFP IR MOA	3.6-3.8"	24.8-3.83 ft	35.8 oz	0.25 MOA	25 MOA	110 MOA	64 MOA	Side Focus 25yds - ∞	Argon	14.4"	4.1"	6.4"	3.9"	2.6"	2.1"	1.8"	2.6"	
			APRS1 FFP IR MIL				0.1 MIL	10 MIL	32 MIL	18 MIL											
			APRS6 FFP IR MIL																		
ARES ETR UHD														* Exposed - Elevation Turret / Capped - Windage Turret    ** Locking Feature on Windage only							
1-10x24 FFP	*Exposed/ Capped	34 mm	ATMR2 FFP IR MOA	3.7"	117.3-11.7 ft	26.9 oz	0.25 MOA	25 MOA	100 MOA	80 MOA	Fixed 100 yds	Argon	10.0" /	6.9"	3.1"	2.5"	2.6"	1.8"	1.3"		
3-18x50 FFP	**Exposed & Locking	34 mm	APLR6 FFP IR MOA	3.74"	39.2-6.65 ft	31.4 oz	0.25 MOA	25 MOA	110 MOA	80 MOA	Side Focus 10yds - ∞	Argon	14.2"	4.2"	6.6"	3.4"	2.6"	2.5"	1.83"	2.25"	
			APRS6 FFP IR MIL				0.1 MIL	10 MIL	32 MIL	25 MIL											
4.5-30x56 FFP	**Exposed & Locking	34 mm	APLR2 FFP IR MOA	3.9"	24.5-3.75 ft	36.5 oz	0.25 MOA	25 MOA	110 MOA	110 MOA	Side Focus 25yds - ∞	Argon	15.3"	5.0"	6.6"	3.7"	2.7"	2.3"	1.83"	2.5"	
			APLR5 FFP IR MOA																		
			APRS1 FFP IR MIL																		
			APRS6 FFP IR MIL				0.1 MIL	10 MIL	32 MIL	32 MIL											
ARES BTR GEN2 HD																					
2.5-15x50 FFP	Exposed	30 mm	APLR4 FFP IR MOA	3.9"	41.8-6.8 ft	27.3 oz	0.25 MOA	25 MOA	100 MOA	100 MOA	Side Focus 10yds - ∞	Argon	13.8"	4.7"	5.5"	3.6"	1.8"	2.2"	1.78"	2.25"	
			APRS5 FFP IR MIL				0.1 MIL	10 MIL	29 MIL	29 MIL											
4.5-27x50 FFP	Exposed	30 mm	APLR4 FFP IR MOA	3.9"	22.7-3.8 ft	27.3 oz	0.25 MOA	25 MOA	80 MOA	80 MOA	Side Focus 25yds - ∞	Argon	13.8"	4.7"	5.5"	3.6"	1.8"	2.2"	1.78"	2.25"	
			APRS5 FFP IR MIL				0.1 MIL	10 MIL	24 MIL	24 MIL											
MIDAS TAC HD														* Exposed - Elevation Turret / Capped - Windage Turret							
4-16x44 FFP	*Exposed/ Capped	30 mm	APRS2 FFP MIL	3.7"	27.7-7 ft	23.8 oz	0.1 MIL	10 MIL	30 MIL	15 MIL	Side Focus 10yds - ∞	Argon	14.2"	4.3"	6.3"	3.6"	2.5"	2.6"	1.71"	2.0"	
5-25x56 FFP	*Exposed/ Capped	34 mm	APLR4 FFP MOA	3.7"	22.1-4.5 ft	30.0 oz	0.25 MOA	25 MOA	110 MOA	110 MOA	Side Focus 25yds - ∞	Argon	15.1"	4.8"	6.6"	3.7"	2.7"	2.36"	1.83"	2.5"	
			APRS3 FFP MIL				0.1 MIL	10 MIL	32 MIL	32 MIL											
			APRS6 FFP MIL																		
6-24x50 FFP	*Exposed/ Capped	30 mm	APLR4 FFP MOA	3.7"	17.8-4.6 ft	26.3 oz	0.25 MOA	25 MOA	85 MOA	50 MOA	Side Focus 10yds - ∞	Argon	14.6"	4.5"	6.3"	3.8"	2.2"	2.6"	1.71"	2.25"	
			APRS2 FFP MIL				0.1 MIL	10 MIL	25 MIL	15 MIL											
			APRS3 FFP MIL																		
MIDAS HMR HD																					
2.5-15x50 SFP	Capped	30 mm	AHMR SFP IR MOA	3.9"	41.8-6.8 ft	26.0 oz	0.25 MOA	15 MOA	60 MOA	60 MOA	Side Focus 10yds - ∞	Argon	13.8"	4.8"	5.5"	3.5"	2.0"	2.4"	1.8"	2.3"	
MIDAS BTR GEN2 HD																					
1-6x24 FFP	Capped	30 mm	ATSR16 SFP IR MOA	3.8"	108-17.6 ft	18.1 oz	0.25 MOA	30 MOA	150 MOA	150 MOA	Fixed 100 yds	Argon	10.6" /	7"	3.7"	2.3"	3.5"	1.7"	1.2"		
4.5-27x50 SFP	Exposed	30 mm	AHMR SFP IR MOA	3.9"	22.7-3.6 ft	26.0 oz	0.25 MOA	25 MOA	85 MOA	85 MOA	Side Focus 30 yds - ∞	Argon	13.8"	4.8"	5.5"	3.5"	2"	2.4"	1.8"	2.3"	
			APRS4 SFP IR MIL				0.1 MIL	10 MIL	25 MIL	25 MIL											

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	EYE RELIEF	FOV @100 YARDS	WEIGHT	CLICK VALUE	ADJ. PER ROTATION	TOTAL ELEVATION ADJ.	TOTAL WINDAGE ADJ.	PARALLAX ADJ.	PURGING MAT.	DIMENSIONS							
													L1	L2	L3	L4	L5	L6	D1	D2
HELOS BTR / *GEN2																				
*1-10X28 SFP	Capped	34 mm	ATMR4 SFP IR MOA	3.2"	110-10 ft	18.3 oz	0.5 MOA	44 MOA	100 MOA	100 MOA	Fixed 100 yds	Argon	10.3" /	6.9"	3.4"	2.0"	3.1"	1.65"	1.3"	
1-4.5x24 SFP	Exposed	30 mm	ATSR3 SFP IR MOA	3.2"	100-22 ft	22.9 oz	0.25 MOA	23 MOA	80 MOA	80 MOA	Side Focus 10yds - ∞	Argon	9.5" /	6.0"	3.5"	1.9"	2.1"	1.6"	1.2"	
*2-12X42 FFP	Exposed & Locking	30 mm	AHMR2 FFP IR MOA	3.6"	55.7-9.6 ft	25.4 oz	0.25 MOA	25 MOA	110 MOA	80 MOA	Side Focus 10yds - ∞	Argon	11.8"	2.9"	5.8"	3.1"	2.7"	1.5"	1.7"	1.95"
			AHMR2 FFP IR MIL				0.1 MIL	10 MIL	32 MIL	25 MIL										
*4-20x50 FFP	Exposed & Locking	30 mm	APLR6 FFP IR MOA	3.6"	27.9-5.6 ft	27.6 oz	0.25 MOA	25 MOA	100 MOA	80 MOA	Side Focus 10yds - ∞	Argon	13.3"	4.65"	5.55"	3.1"	2.0"	2.0"	1.7"	2.25"
			APRS6 FFP IR MIL				0.1 MIL	10 MIL	29 MIL	25 MIL										
*6-24x56 FFP	Exposed & Locking	34 mm	APLR6 FFP IR MOA	3.7"	19.9-5.12 ft	34.5 oz	0.25 MOA	25 MOA	100 MOA	80 MOA	Side Focus 10yds - ∞	Argon	14.3"	4.75"	6.0"	3.55"	2.4"	2.0"	1.85"	2.5"
			APRS6 FFP IR MIL				0.1 MIL	10 MIL	29 MIL	25 MIL										

ARGOS BTR GEN2																				
1-8x24 SFP	Capped	30 mm	ATSR5 SFP IR MOA	3.5"	110-14.5 ft	16.1 oz	0.5 MOA	44 MOA	120 MOA	120 MOA	Fixed 100 yds	Argon	9.8"	/	6.2"	3.6"	2.3"	2.4"	1.8"	1.2"
6-24x50 FFP	Exposed	30 mm	APLR2 FFP IR MOA	3.3"	16.7-4.5 ft	30.3 oz	0.25 MOA	12 MOA	60 MOA	60 MOA	Side Focus 10yds - ∞	Argon	14.1"	4.2"	6.2"	3.7"	2.0"	2.1"	1.8"	2.2"
			APMR FFP IR MIL				0.1 MIL	5 MIL	18 MIL	18 MIL										
8-34x56 FFP	Exposed	30 mm	APLR2 FFP IR MOA	3.3"	12.5-3 ft	32.0 oz	0.25 MOA	12 MOA	45 MOA	45 MOA	Side Focus 15yds - ∞	Argon	15.5"	4.9"	6.9"	3.7"	2.0"	2.9"	1.8"	2.5"
			APMR FFP IR MIL				0.1 MIL	5 MIL	13 MIL	13 MIL										
10-40x56 SFP	Exposed	30 mm	BLR SFP MOA	3"	12.6-3.1 ft	31.8 oz	0.125 MOA	6 MOA	45 MOA	45 MOA	Side Focus 15yds - ∞	Argon	16.3"	6.0"	6.8"	3.5"	1.5"	3.3"	1.8"	2.5"
ARGOS HMR																				
2-12x42 SFP	Capped	1"	BDC 600	3.6"	55.7-9.6 ft	19.8 oz	0.25 MOA	15 MOA	80 MOA	80 MOA	Side Focus 10 yds - ∞	Argon	11.8"	3.3"	5.3"	3.2"	2.1"	1.6"	1.7"	2.0"
			BDC 600A																	
			AHMC SFP MOA																	
4-20x50 SFP	Capped	1"	BDC 600A	3.6"	27.9-5.6 ft	21.0 oz	0.25 MOA	15 MOA	80 MOA	80 MOA	Side Focus 10 yds - ∞	Argon	13.2"	5.0"	5.0"	3.2"	1.8"	1.6"	1.7"	2.3"
			AHMC SFP MOA																	
			MIL-DOT																	



CRONUS BTR GEN2 UHD  
ATSR2 SFP IR MOA

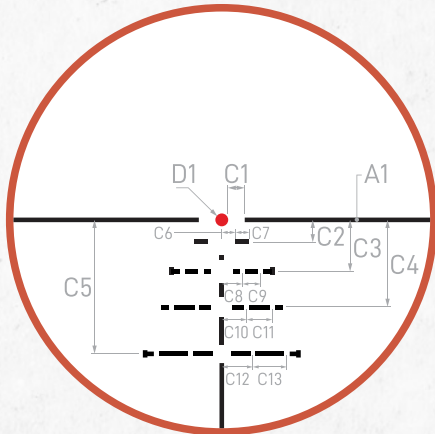


ATSR2 SFP IR MOA Designed around the .223/5.56mm using a 69 grain Sierra Match King and a 200 yard zero. The open center design allows shooters to engage 12-18" targets out to 600 yards by quickly bracketing the target. Subtension holds for 300, 400, 500, and 600 yards are calibrated to compensate for 0, 5, and 10 MPH winds. The 3-post cross hair design quickly draws the shooters attention to the illuminated center dot. Perfect for 3-gun competitions or the hunter looking for short to midrange engagement when seconds matter.

\*for 1-6x24: subtension valid @ 6x

SUBTENSIONS IN MOA

A1	C1	C2	C3	C4	C5	C6	C7
0.5	2.5	2.4	5.6	9.5	14.6	1.5	1.5
C8	C9	C10	C11	C12	C13	D1	
2.25	2	2.7	2.8	3.4	3.7	1.4	

CRONUS BTR GEN2 UHD  
APRS1 FFP IR MIL

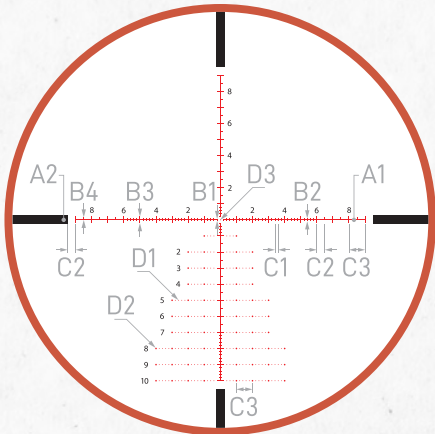


APRS1 FFP IR MIL reticle is designed for precision rifle series competition and any other long range shooting applications with accurate ranging capability. It can help you quickly determine distance, holdover positions, windage correction and leads for a moving target. The unique design of fine .2 mil hash mark increments from center to 6 mils to both left and right helps the shooter set a quick windage holdover position after he or she dials in elevation on their targets. The floating 0.04 center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

SUBTENSIONS IN MIL

A1	A2	B1	B2	B3	B4
0.025	0.5	0.1	0.18	0.4	0.15
C1	C2	C3	D1	D2	D3
0.2	0.5	1	0.05	0.1	0.04

ARES ETR UHD  
ATMR2 FFP IR MOA

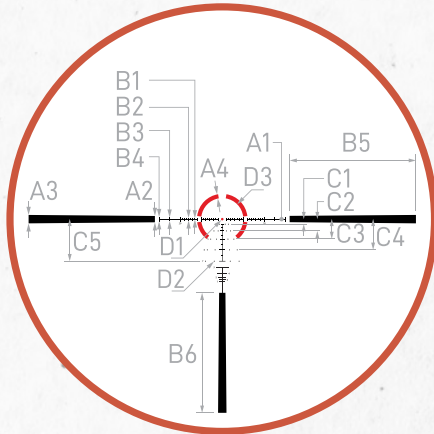


ATMR2 FFP IR MOA reticle is designed for fast close-range situations and mid-range shooting, using 68 or 69 gr .223/5.56 Nato cartridges. On 1x the 20 moa illuminated quartered ring and 1.2 moa center dot provide the same fast-acquisition capabilities of a standard red dot. Increasing magnification, the holdover and windage subtensions become visible. The .5 moa wind holds for 5 and 10 mph winds. As a First Focal Plane scope the reticle remains valid throughout the magnification range providing holdovers out to 700 yards. A built-in ranging tree on the lower vertical post provides quick range estimation on a 36" tall silhouette target.

SUBTENSIONS IN MOA

A1	A2	A3	A4	B1	B2	B3	B4	B5
0.25	3	4	2	0.4	1.2	1.5	2	60
B6	C1	C2	C3	C4	C5	D1	D2	D3
57	2.4	5.6	9.5	14.6	20	1.2	0.5	20

ARES ETR UHD  
ATMR3 FFP IR MIL

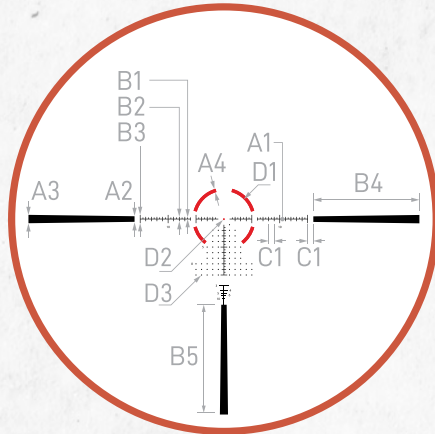


The most versatile scope in our line-up, paired with an equally versatile reticle. Fast CQB or long-range engagements are easily made thanks to this uniquely designed First Focal Plane reticle. The illuminated 10 mil quartered ring and precise .35 mil center aid in fast acquisition on low magnification. As the magnification increases the versatile holdover and windage subtensions become visible, turning this into a mid to long range capable optic. If mil ranging isn't for you, default to the simple silhouette target ranging tree at just above the vertical post.

SUBTENSIONS IN MIL

A1	A2	A3	A4	B1	B2	B3
0.11	1	1.5	0.6	0.3	0.8	1.5
B4	B5	C1	D1	D2	D3	
19	19.67	1	10	0.35	0.15	

CRONUS BTR GEN2 UHD  
APLR5 FFP IR MOA

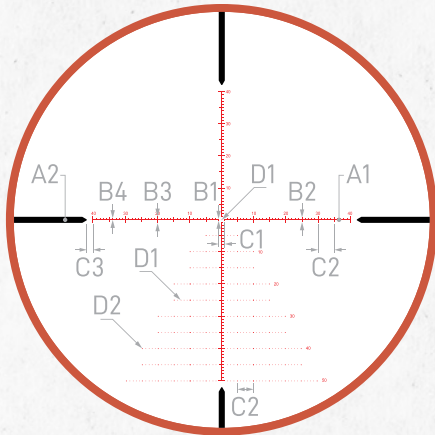


APLR5 FFP IR MOA reticle is designed for precision rifle series competition and any other long range shooting applications with accurate ranging capability. It can help you quickly determine distance, hold-over positions, windage correction and leads for a moving target. The unique design of the fine 1 moa hash mark increments from center to 40 moa to both left and right helps the shooter determine a quick windage holdover position after he or she dialed in elevation on their targets. The floating 0.2 moa center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	B4
0.13	2	0.6	1.5	2	0.5
C1	C2	C3	D1	D2	
2	5	2	0.2	0.3	

CRONUS BTR GEN2 UHD  
APRS6 FFP IR MIL

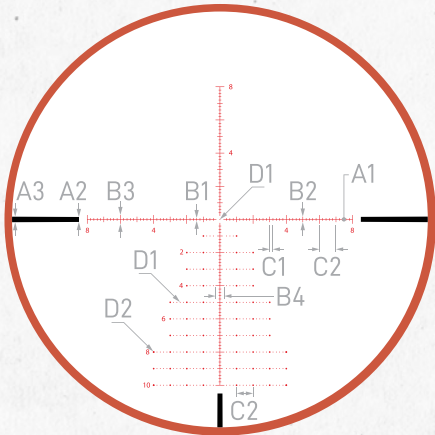


APRS6 FFP IR MIL reticle is designed for precision rifle series competition and any other long range shooting applications with accurate ranging capability. It can help you quickly determine distance, hold-over positions, windage correction and leads for a moving target. The unique design of fine 0.2 mil hash mark increments from center to four directions helps the shooter set a quick elevation or windage holdover position. The floating 0.05 mil center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

SUBTENSIONS IN MIL

A1	A2	A3	B1	B2	B3
0.025	0.3	0.4	0.18	0.35	0.55
B4	C1	C2	D1	D2	D3
0.4	0.2	1	0.04	0.05	0.1

ARES ETR UHD  
APLR6 FFP IR MOA

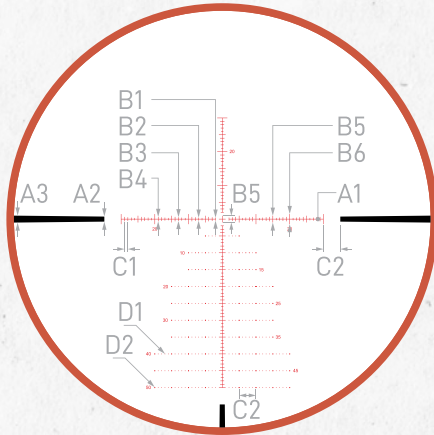


APLR6 FFP IR MOA reticle has a 2 moa floating center cross with 1 moa hash mark increments and drop lines in 5 moa increments on vertical direction down to 50 moa, both of which help you quickly lock in your target and set holdover positions. The gap between the floating center cross and the first hash mark is 1 moa at four directions. The drop lines have smaller dots with 1 moa in between and bigger dots at each 5 moa interval, starting 10 moa length horizontally and end up 40 moa in length at the 50 moa drop line. The unique design of the floating center cross with 2 moa span in the middle provides little to none target obstruction for engaging small targets at long distances.

SUBTENSIONS IN MOA

A1	A2	A3
----	----	----



ARES ETR UHD  
APLR5 FFP IR MOA

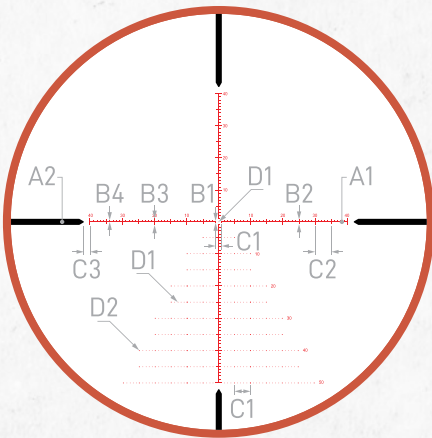


SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	B4
0.13	2	0.6	1.5	2	0.5
C1	C2	C3	D1	D2	
2	5	2	0.2	0.3	

APLR5 FFP IR MOA reticle is designed for precision rifle series competition and any other long range shooting applications with accurate ranging capability. It can help you quickly determine distance, holdover positions, windage correction and leads for a moving target. The unique design of the fine 1 moa hash mark increments from center to 40 moa to both left and right helps the shooter determine a quick windage holdover position after he or she dialed in elevation on their targets. The floating 0.2 moa center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

ARES ETR UHD  
APLR2 FFP IR MOA

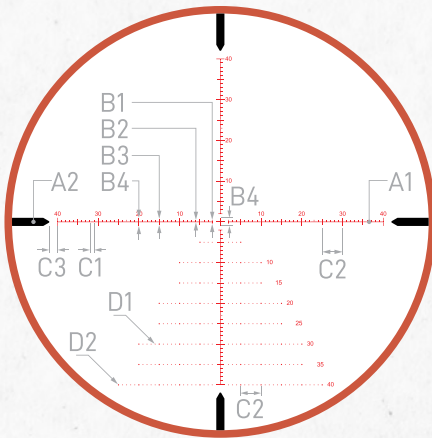


SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	B4
0.14	2	1	0.5	1.5	2
C1	C2	C3	D1	D2	
1	5	2	0.2	0.3	

APLR2 FFP IR MOA reticle has a large illuminated center with 1 moa hash mark increments and drop lines in 5 moa increment on vertical direction down to 40 moa, both of which help you quickly lock in your target and set holdover positions. The illuminated portion has a 2 moa span center cross with illuminated cross line extends to 40 moa on both vertical and horizontal direction. The unique design of having droplines going down to 40 moa with 5 moa between each drop line and 1 moa hash marks in between provide excellent hold over positions for long precision shooting.

ARES BTR GEN2 HD  
APRS5 FFP IR MIL

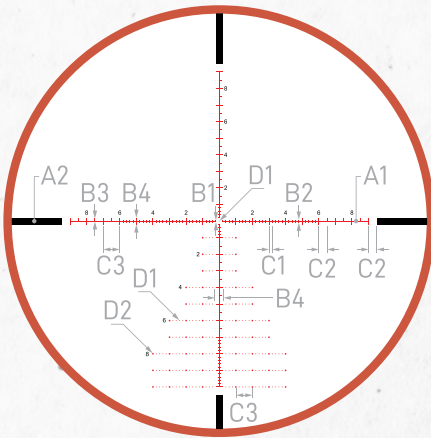


SUBTENSIONS IN MIL

A1	A2	B1	B2	B3	B4
0.06*	0.5*	0.1	0.18	0.15	0.4
C1	C2	C3	D1	D2	
0.2	0.5	1	0.05	0.1	

APRS5 FFP IR MIL reticle is designed for precision rifle series competition and any other long range shooting applications with accurate ranging capability. It can help you quickly determine distance, hold-over positions, windage correction and leads for a moving target. The unique design of fine .2 mil hash mark increments from center to 6 mils to both left and right helps the shooter set a quick windage holdover position after he or she dialed in elevation on their targets. The floating 0.05 mil center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

\*for 2.5-15x50: A1 = 0.06, A2 = 0.5  
for 4.5-27x50: A1 = 0.03, A2 = 0.4

MIDAS TAC HD  
APRS2 FFP MIL

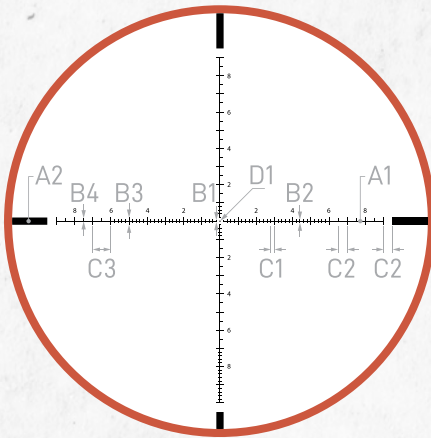


SUBTENSIONS IN MIL

A1	A2	B1	B2	B3	
0.04*	0.4	0.1	0.18	0.4	
B4	C1	C2	C3	D1	
0.15	0.2	0.5	1	0.06*	

APRS2 FFP MIL reticle is designed for precision rifle series competition and any other long range shooting applications with accurate ranging capability. It can help you quickly determine distance, holdover positions and windage corrections. The unique design of fine .2 mil hash mark increments from center to 6 mils to both left and right helps the shooter set a quick windage holdover position after he or she dialed in elevation on their targets. The floating 0.05 (0.06) center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

\*for 4-16x44: A1 = 0.04, D1 = 0.06  
for 6-24x50: A1 = 0.03, D1 = 0.05

ARES ETR UHD  
APRS1 FFP IR MIL

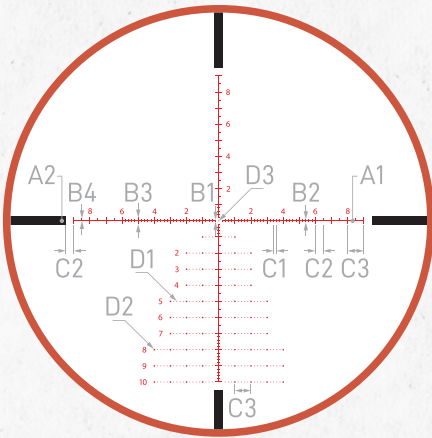


SUBTENSIONS IN MIL

A1	A2	B1	B2	B3	B4
0.03	0.5	0.1	0.18	0.4	0.15
C1	C2	C3	D1	D2	D3
0.2	0.5	1	0.05	0.1	0.03

APRS1 FFP IR MIL reticle is designed for precision rifle series competition and any other long range shooting applications with accurate ranging capability. It can help you quickly determine distance, holdover positions, windage correction and leads for a moving target. The unique design of fine .2 mil hash mark increments from center to 6 mils to both left and right helps the shooter set a quick windage holdover position after he or she dialed in elevation on their targets. The floating 0.03 center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

ARES BTR GEN2 HD  
APLR4 FFP IR MOA

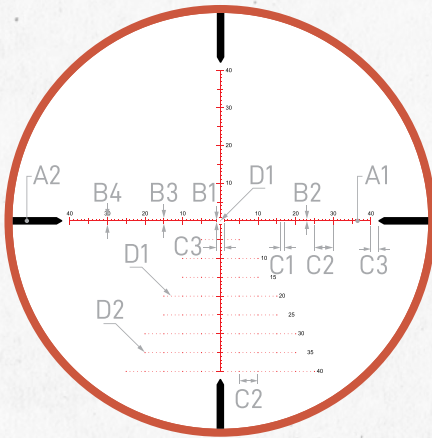


SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	B4
0.24*	2	0.6	0.5	1.5	2
C1	C2	C3	D1	D2	
1	5	2	0.2	0.3	

APLR4 FFP IR MOA reticle has a 0.2 moa floating center dot with 1 moa hash mark increments and drop lines in 5 moa increments on vertical direction down to 40 moa, both of which help you quickly lock in your target and set holdover positions. The gap between the floating center dot and the first hash mark is 1 moa at four directions. The drop lines have smaller dots with 1 moa in between and bigger dots at each 5 moa interval, starting 10 moa length horizontally and end up 50 moa in length at the 40 moa drop line. The floating center dot with 2moa span gap in the middle provides little to none target obstruction for engaging small targets at long distances.

\*for 2.5-15x50: A1 = 0.24  
for 4.5-27x50: A1 = 0.13

MIDAS TAC HD  
APLR4 FFP MOA

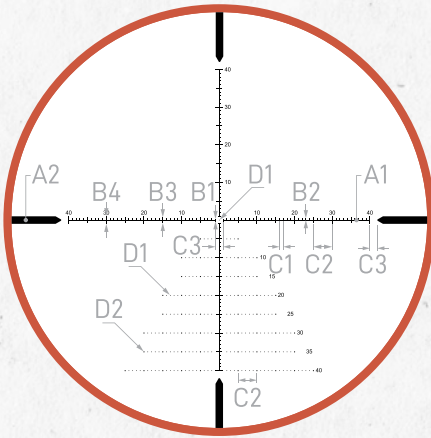


SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	B4
0.12	2	0.6	0.5	1.5	2
C1	C2	C3	D1	D2	
1	5	2	0.2	0.3	

APLR4 FFP MOA reticle is a blend of precision marksman and long-range hunter. The open center design eliminates target obstruction by utilizing a .2 moa diameter dot. 1 moa hash-mark increments provide fast holdovers up to 40 moa, compensating for both windage and elevation.

MIDAS TAC HD  
APRS3 FFP MIL

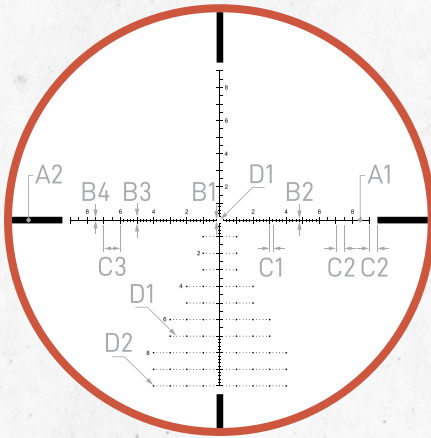


SUBTENSIONS IN MIL

A1	A2	B1	B2	B3	B4
0.03	0.4	0.1	0.18	0.4	0.15
C1	C2	C3	D1	D2	
0.2	0.5	1	0.05	0.1	

APRS3 FFP MIL reticle is a dual use design. Allowing the shooter to accurately range and compensate windage and elevation holdovers should they prefer not to make turret elevation adjustments between shots. Quick windage or lead holdovers is possible due to the .2 mil increment hash marks. This open-center reticle features a .05 mil-floating dot, quickly drawing the shooters attention to the center.




MIDAS TAC HD  
APRS6 FFP MIL

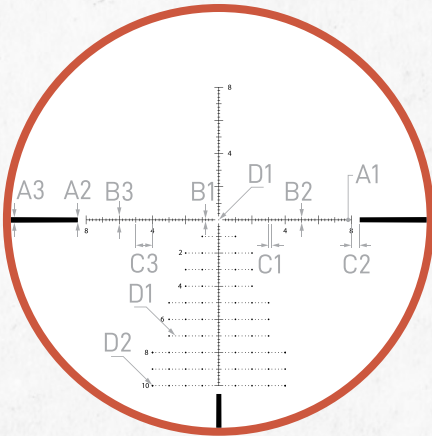

SUBTENSIONS IN MIL					
A1	A2	A3	B1	B2	B3
0.03	0.3	0.4	0.18	0.35	0.55
C1	C2	C3	D1	D2	
0.2	0.5	1	0.05	0.1	

APRS6 FFP MIL reticle is designed for precision rifle series competition and any other long range shooting applications with accurate ranging capability. It can help you quickly determine distance, hold-over positions, windage correction and leads for a moving target. The unique design of fine 0.2 mil hash mark increments from center to four directions helps the shooter set a quick elevation or windage holdover position. The floating 0.05 mil center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

MIDAS HMR HD  
AHMR SFP IR MOA

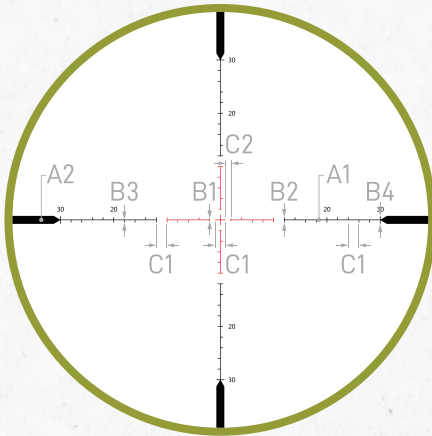


SUBTENSIONS IN MOA			
A1	A2	B1	B2
0.12	1.5	0.5	1
B3	B4	C1	C2
0.5	1.5	2	1

AHMR SFP IR MOA reticle has an illuminated 20 moa center with a 2 moa center cross and 2 moa incremental hash marks which provide a unique two layer visual reference for a shooter to locate and get dead on the target within a blink of an eye. The illuminated reticle provides excellent low light visibility. The unique design of the markings with 2 & 4 moa and 6 & 8 moa locating at the opposite side of the lines gives you a clear reading of the markings with no confusions.


\*for 2.5-15x50:  
subtension valid @ 15x

MIDAS BTR GEN2 HD  
ATSR4 SFP IR MOA

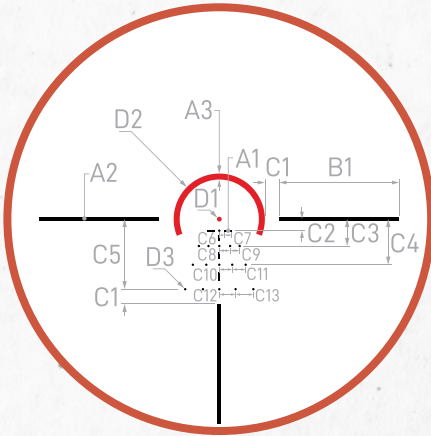



HELOS BTR  
ATSR3 SFP IR MOA

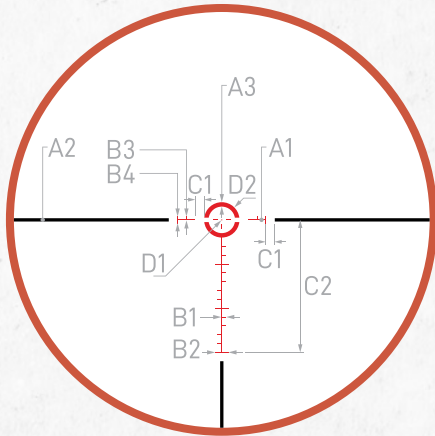


ATSR3 SFP IR MOA is designed for High Power Service Rifle matches. A 12 moa center circle outlines a 8 moa floating cross with a precise .5 moa center dot. The outer circle helps the shooter find the quickly, while the .5 moa floating dot allows for precise shot placement. Illuminated subtensions provide contrast between the reticle and target.

\*for 1-4.5x24:  
subtension valid @ 4.5x

SUBTENSIONS IN MOA

A1	A2	A3	B1	B2	B3
0.45	1.5	4	2	6	1.5
B4	C1	C2	D1	D2	
3	4	60	0.5	16	

HELOS BTR GEN2  
AHMR2 FFP IR MIL

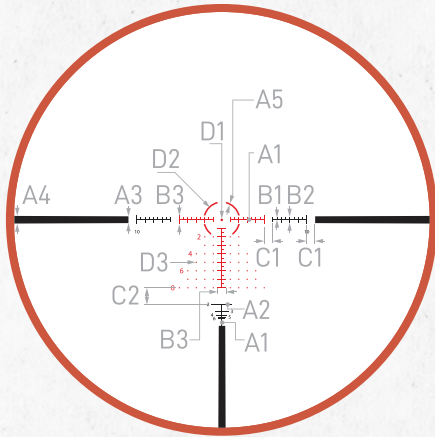


AHMR2 FFP IR MIL reticle is specifically designed for both hunting and shooting competitions. The 0.3 mil (1 moa) red dot is perfect for zeroing your rifle at 100 yards and the dots below the center red dot are for windage holdover with 0.5 mil increments. The center dot with 4 mil diameter circle provides quick aiming point at lower power and enough details for longer distance targets at higher power. The illumination of the reticle provides great visibility during low light conditions. The ranging reticle down below is specially designed for ranging a deer body mass (from belly to the top of shoulder of a whitetail buck) from 200 yds to 600 yds.

SUBTENSIONS IN MIL

A1	A2	A3	A4	A5	B1	B2
0.084	0.05	0.8	1.3	0.18	0.25	0.7
B3	C1	C2	C3	D1	D2	D3
1	1	2	2.5	0.3	4	0.15

HELOS BTR GEN2  
AHMR2 FFP IR MOA

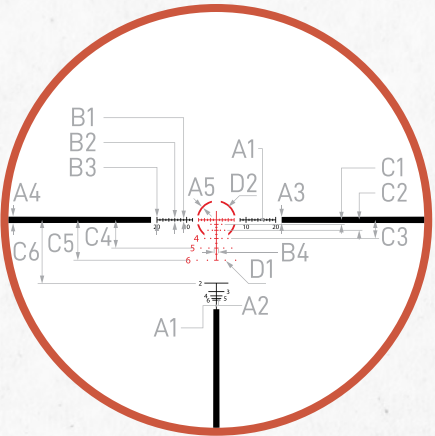


AHMR2 FFP IR MOA reticle is specifically designed for hunting and mid range application and the popular hunting caliber rifles with hold over points for both bullet drop compensation and wind holdover. The reticle is designed for you to zero your rifle a 100 yds center and use the bullet drop holdover up to 700 yds. The dots on horizontal lines below the center are specially designed for holding over for 5 mph and 10 mph wind. The ranging reticle down below is specially designed for ranging a deer body mass (from belly to the top of shoulder of a whitetail buck) from 200 yds to 600 yds. The illuminated center portion of the reticle provides great visibility during dusk and dawn low light conditions.

SUBTENSIONS IN MOA

A1	A2	A3	A4	A5	B1	B2	B3	B4
0.29	0.18	2	3	0.6	0.8	1.2	2	1.5
C1	C2	C3	C4	C5	C6	D1	D2	
1.5	3.5	6.25	9.5	13.6	21.5	0.45	12	

HELOS BTR GEN2  
APLR6 FFP IR MOA

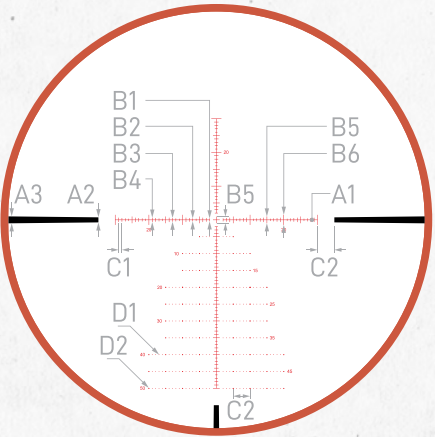


APLR6 FFP IR MOA reticle has a 2 moa floating center cross with 1 moa hash mark increments and drop lines in 5 moa increments on vertical direction down to 50 moa, both of which help you quickly lock in your target and set holdover positions. The gap between the floating center cross and the first hash mark is 1 moa at four directions. The drop lines have smaller dots with 1 moa in between and bigger dots at each 5 moa interval, starting 10 moa length horizontally and end up 40 moa in length at the 50 moa drop line. The unique design of having the floating center cross with 2 moa span in the middle provides little to none target obstruction for engaging small targets at long distances.

SUBTENSIONS IN MOA

A1	A2	A3	B1	B2	B3	B4
0.12*	1.5	2	0.7	0.9	1.1	1.3
B5	B6	C1	C2	D1	D2	
2	3	1	5	0.2	0.3	

\*for 4-20x50: A1 = 0.17  
for 6-24x56: A1 = 0.12

HELOS BTR GEN2  
APRS6 FFP IR MIL

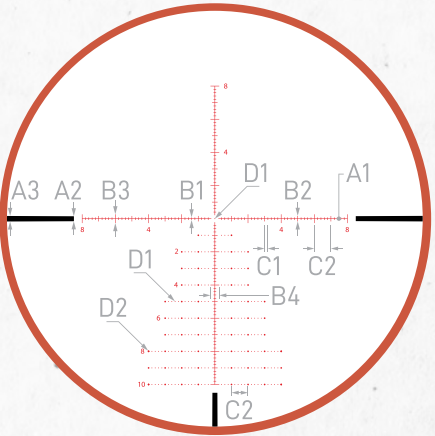


APRS6 FFP IR MIL reticle is designed for precision rifle series competition and any other long range shooting applications with accurate ranging capability. It can help you quickly determine distance, hold-over positions, windage correction and leads for a moving target. The unique design of fine 0.2 mil hash mark increments from center to four directions helps the shooter set a quick elevation or windage holdover position. The floating 0.05 mil center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

SUBTENSIONS IN MIL

A1	A2	A3	B1	B2	B3
0.033*	0.3	0.4	0.18	0.35	0.55
B4	C1	C2	D1	D2	
0.4	0.2	1	0.05	0.1	

\*for 4-20x50: A1 = 0.05  
for 6-24x56: A1 = 0.033

ARGOS BTR GEN2  
APLR2 FFP IR MOA

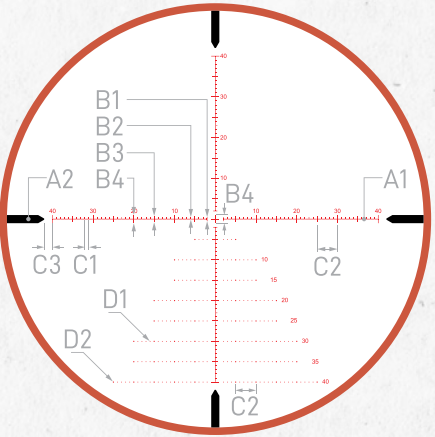


APLR2 FFP IR MOA reticle has a large illuminated center with 1 moa hash mark increments and drop lines in 5 moa increment on vertical direction down to 40 moa, both of which help you quickly lock in your target and set holdover positions. The illuminated portion has a 2 moa span center cross with illuminated cross line extends to 40 moa on both vertical and horizontal direction. The unique design of having droplines going down to 40 moa with 5 moa between each drop line and 1 moa hash marks in between provide excellent hold over positions for long precision shooting.

SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	B4
0.14	2	1	0.5	1.5	2
C1	C2	C3	D1	D2	
1	5	2	0.2	0.3	

ARGOS BTR GEN2  
ATSR5 SFP IR MOA

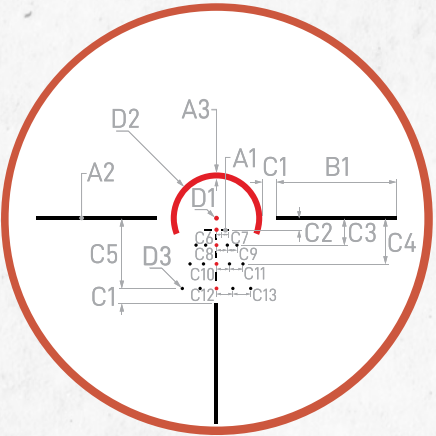


ATSR5 SFP IR MOA reticle is calibrated for a 68 grain Hornady and 69 grain Sierra cartridges, and suitable for any 5.56 Nato/.223 caliber rifle using a 200 yard zero. The 25 moa horizontal and lower 1/3rd crosshairs quickly draw the shooters eye to the illuminated 19 moa horseshoe and 1.4 moa center dot. The 19 moa horseshoe is designed to bracket a silhouette target at 100 yards. With a 200 yard zero, the precise .5 moa elevation holds compensate for 300, 400, 500, and 600 yards and 0, 5, and 10 mph winds.

\*for 1-8x24: subtension valid @ 8x

SUBTENSIONS IN MOA

A1	A2	A3	B1	C1	C2	C3	C4	C5	C6
0.3	0.8	1.25	25	3	2.4	5.6	9.5	14.6	1.07
C7	C8	C9	C10	C11	C12	C13	D1	D2	D3
1.5	2.25	2	2.7	2.8	3.4	3.7	1	19	0.7

ARGOS BTR GEN2  
APMR FFP IR MIL

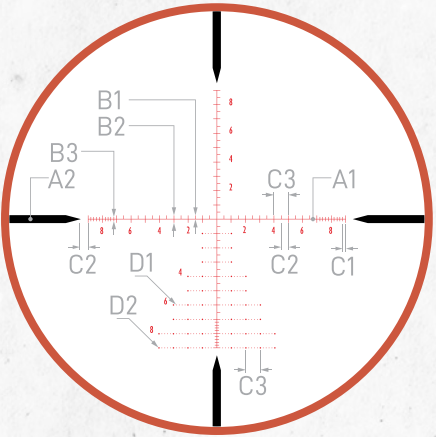


APMR FFP IR MIL reticle is designed to maximize your performance on long and mid-distance shooting with illuminated center cross and 0.5 mil hash mark, the APMR IR MIL reticle can help you quickly lock in your target and set holdover positions and leads for a moving target. The illuminated 18 mil span cross lines with 0.5 mil hash marks and 0.2 mil hash marks from 7 mil to 9 mil on three directions provide finer details that helps the shooter quickly locate the target and find a holdover position within higher level of precision and confidence.

SUBTENSIONS IN MIL

A1	A2	B1	B2	B3
0.02	0.4	0.2	0.4	0.3
C1	C2	C3	D1	D2
0.2	0.5	1	0.05	0.1



## ARGOS BTR GEN2 BLR SFP MOA

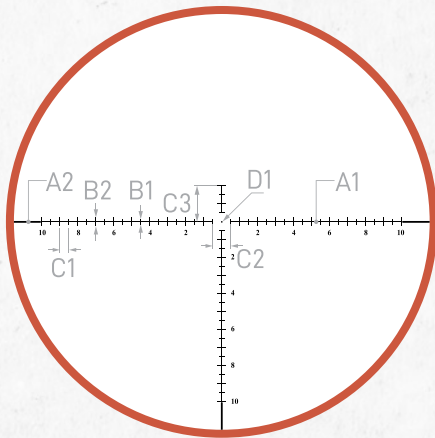


BLR SFP MOA reticle is designed to maximize your performance for both Bench Rest and F-Class shooting applications. Fine line thickness of the reticle (0.016 moa) allows for pinpoint precision at extreme ranges, especially on smaller targets. A non-illuminated floating center dot (0.09 moa thick) provides a precise aiming point. This reticle combined with the Argos BTR Rifle Scope provides the perfect solution.

\*for 10-40x56:  
subtension valid @ 40x

### SUBTENSIONS IN MOA

A1	A2	B1	B2
0.016	0.1	0.3	0.5
C1	C2	C3	D1
0.5	1	2	0.09

## ARGOS HMR BDC 600

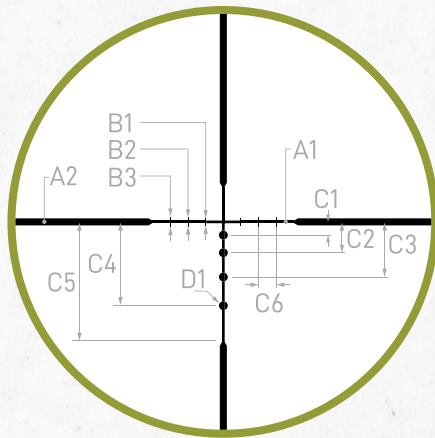


BDC 600 reticle can be used effectively with a variety of firearms giving your accurate ranges and reference marks which can be used to compensate for bullet drift in windy conditions or range distances.

\*for 2-12x42: subtension valid @ 12x  
for 4-20x50: subtension valid @ 20x

### SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	C1
0.3	0.8	0.8	1	1.2	1.5
C2	C3	C4	C5	C6	D1
3.5	6.25	9.5	13.6	2	1

## ARGOS HMR / TALOS MIL-DOT

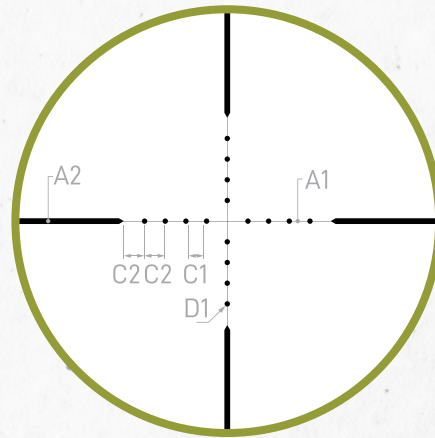


Mil-Dot reticle is one of the most accurate, versatile means of estimating ranges using a manual optical device. The MIL-DOT allows the user to do range estimations, holdover and wind drift compensation as well as for precise leads for moving targets.

\*for 4-20x50: subtension valid @ 20x  
for 3-12x40: subtension valid @ 12x  
for 4-16x40: subtension valid @ 16x

### SUBTENSIONS IN MIL

A1	A2	C1
0.05	0.25	0.75
C2	D1	
1	0.25	

## TALOS BTR APLR2 FFP IR MIL

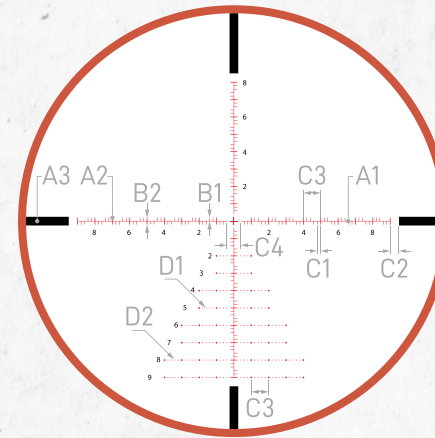


APLR2 FFP IR MIL reticle is designed to maximize your performance on precision long and mid range shooting with accurate ranging capability. It will help you quickly determine distance, holdover positions, windage correction and leads for a moving target. The unique design of fine .2 mil hach mark, having .2 and .4 on one side of either horizontal or vertical line and .6 and .8 on another side, helps the shooter quickly locate a holdover position with .2 mil increments within a blink of an eye. The illuminated fine reticle provides excellent low light visibility and windage holdovers on the bullet droplines all the way up to 9 mils with .2 mil marks increments between.

### SUBTENSIONS IN MIL

A1	A2	A3	B1	B2	C1
0.025	0.04	0.5	0.1	0.2	0.2
C2	C3	C4	D1	D2	
0.5	1	0.8	0.05	0.1	

## ARGOS HMR BDC 600A IR

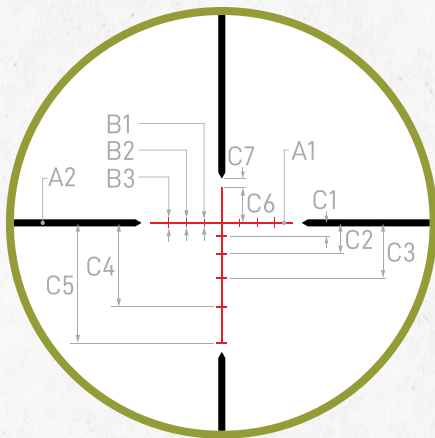


BDC 600A IR reticle can be used effectively with a variety of firearms giving your accurate ranges and reference marks which can be used to compensate for bullet drift in windy conditions or range distances. The user can sight in at 100 yards on any magnification setting, but for the ballistic reticle feature to function properly, the scope's magnification must be set to the correct power.

\*for 2-12x42: subtension valid @ 12x  
for 4-20x50: subtension valid @ 20x

### SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	C1
0.15	0.6	0.8	1	1.2	1.5
C2	C3	C4	C5	C6	D1
3.5	6.25	9.5	13.6	4	1

## ARGOS HMR AHMC SFP MOA

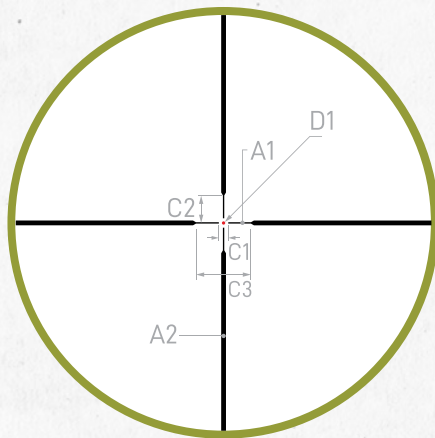


AHMC SFP IR MOA is a traditional hunting style reticle with an illuminated center-dot. The outside crosshair is bold, and prominently stands out against backgrounds that are tough to differentiate. It tapers down to a fine crosshair with a floating center-dot to reduce target obstruction, while drawing your eye to the center of the reticle.

\*for 2-12x42: subtension valid @ 12x  
for 4-20x50: subtension valid @ 20x

### SUBTENSIONS IN MOA

A1	A2	C1
0.25	0.9	2
C2	C3	D1
6.5	13	0.7

## TALOS BTR AHSR14 SFP IR MIL

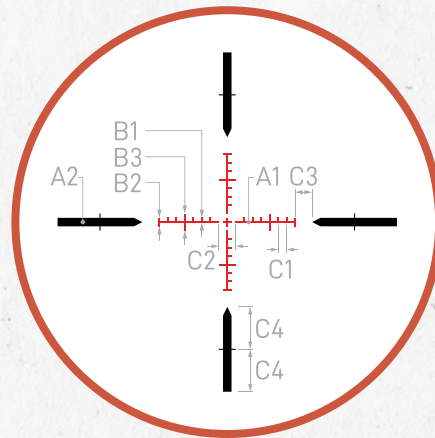


AHSR 14 SFP IR MIL reticle is designed to maximize your performance on short range shooting with illuminated 1 mil center cross and 1 mil hash marks increments extended to 8 mils on both horizontal and vertical directions and can help you quickly spot your target and set holdover positions and leads for a moving target. The illuminated 16 mil center with an 1 mil center cross (0.5 mil from center to the side) and 10 mil black lines enable a shooter to quickly locate the target and put it right on the center cross within a blink of an eye. The illuminated portion of the reticle provides excellent low light visibility.

### SUBTENSIONS IN MIL

A1	A2	B1	B2	B3
0.13	1	0.5	1	2
C1	C2	C3	C4	
1	2	2	5	

## TALOS BDC 600 IR

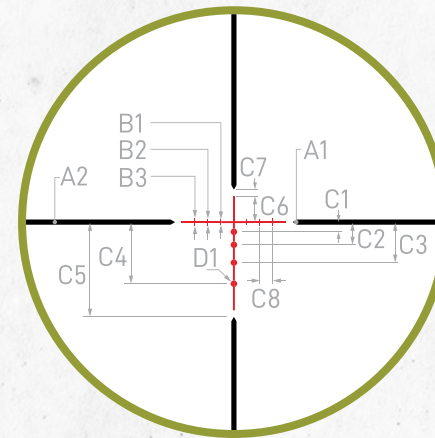

BDC 600 IR was designed to deliver a high level of precision at extended targets that can be used with today's most popular rifle cartridges.


\*for 3-12x40: subtension valid @ 12x  
for 4-16x40: subtension valid @ 16x  
for 6-24x50: subtension valid @ 18x

### SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	C1	C2
0.3	0.8	0.8	1	1.2	1.5	3.5
C3	C4	C5	C6	C7	C8	D1
6.25	9.5	13.6	4	1	2	1



### TALOS / NEOS CENTER X

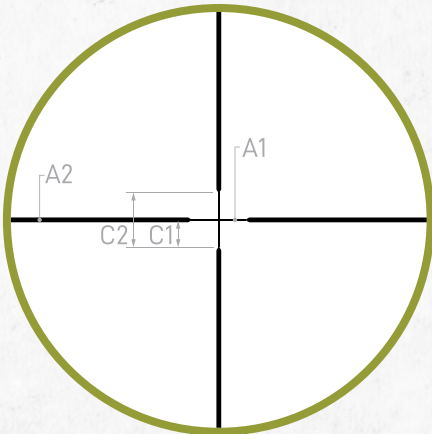


Center X reticle is a perfect choice for shooters wishing to have a clear field of view with a more traditional cross-hair. The Center X reticle allows shooters to quickly view their target while maintaining one distinct aiming point on their reticle. The heavy posts stand out nicely against cover and in twilight conditions, pointing boldly to the intersection.

\*for 3-9x40: subtension valid @ 9x  
for 3-12x40: subtension valid @ 12x  
for 4-12x40: subtension valid @ 12x  
for 6-18x44: subtension valid @ 18x

#### SUBTENSIONS IN MOA

MODEL	A1	A2	C1	C2
3-9x40	0.25	0.9	6.5	13
3-12x40	0.18	0.7	4.5	9
4-12x40	0.18	0.7	4.5	9
6-18x44	0.12	0.5	3.2	6.5

### NEOS BDC 500 IR

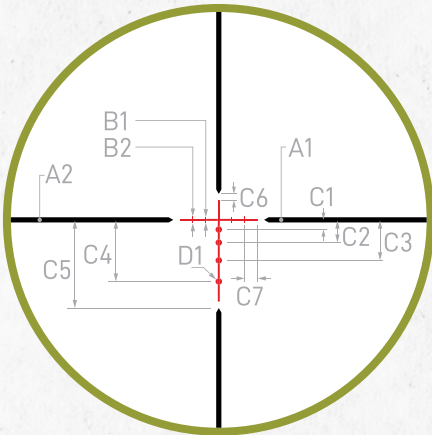


BDC 500 IR was designed to deliver a high level of precision at extended targets that can be used with today's most popular rifle cartridges.

\*for 3-9x40: subtension valid @ 9x  
for 4-12x40: subtension valid @ 12x  
for 6-18x44: subtension valid @ 18x

#### SUBTENSIONS IN MOA

A1	A2	B1	B2	C1	C2
0.3	0.8	0.8	1	1.5	3.5
C3	C4	C5	C6	C7	D1
6.25	9.5	13.6	1	2	1

### TALOS ATMR1 SFP IR MIL

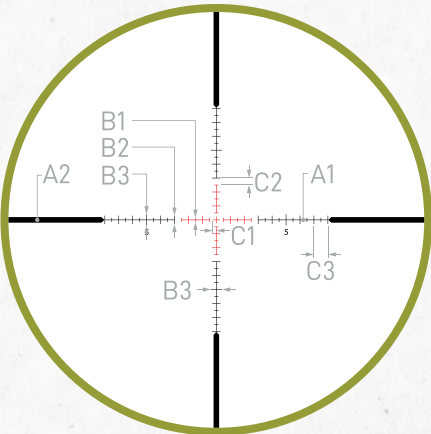


ATMR1 SFP IR MIL reticle is perfect for shooting at the range or competing in competitions. The customized mil hash mark design helps to eliminate any guesswork with holdover and windage adjustments. The illuminated reticle is great for low light situations when you need to count on a good, accurate shot.

\*for 6-24x50: subtension valid @ 18x

#### SUBTENSIONS IN MIL

A1	A2	B1	B2
0.02	0.5	0.3	0.6
B3	C1	C2	C3
0.8	0.25	0.5	1

### NEOS BDC 22 RIM FIRE

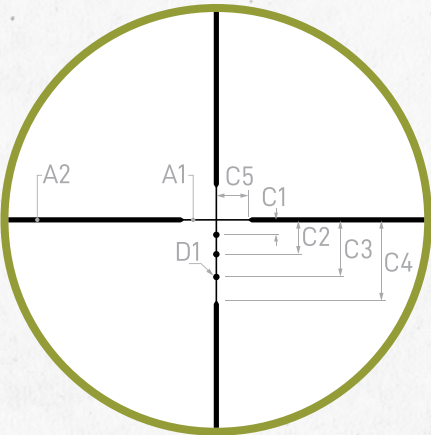

BDC22 Rim fire reticle was designed specifically for rimfire. This reticle allows shooters to compensate for bullet drop at extended shooting distances. When using a .22 LR with a muzzle velocity of approximately 1,250 feet per second, this reticle is designed to be zeroed at 50 yards, providing bullet drop compensation for 75, 100, 125 and 150 yards.

\*for 3-9x40: subtension valid @ 9x  
for 4-12x40: subtension valid @ 12x


#### SUBTENSIONS IN MOA

A1	A2	C1	C2
0.25	0.8	2.3	5.3
C3	C4	C5	D1
8.8	12.5	5	1

## RED DOT SIGHT RETICLES

When you need fast, effective, accurate, simple and reliable, Athlon Optics Red Dot family of products is just what you need. The Red Dot offers a bright red light for easy vision in all lighting situations. When the stakes are at their highest, whatever your needs are, trust your shot with Athlon Optics.


### MIDAS TSR1 - TSR2 - TSR3



#### SUBTENSIONS IN MOA


D1 (TSR1)	D1 (TSR2)	D1 (TSR3)
3	2	2

### MIDAS LE-GEN2 (Interchangeable)



#### SUBTENSIONS IN MOA

A1	B1	C1	C2	D1	D2
1.5	14	15	72	2	65



Dot



Circle




Dot-Circle

## PRISM SCOPE RETICLES

Designed specifically for fast target acquisition, Athlon Optics Prism Scopes are high performing, durable and reliable. Ideal for close to medium range shooting and rugged for any situation you may encounter.


### MIDAS TSP1 (RED/GREEN)

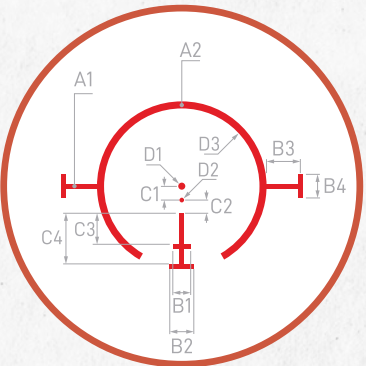

#### SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	B4	C1
2	3	7.6	10.2	15	10	5.9
C2	C3	C4	D1	D2	D3	
5.6	13.2	22	3	2	66	


### MIDAS TSP3 (RED/GREEN)

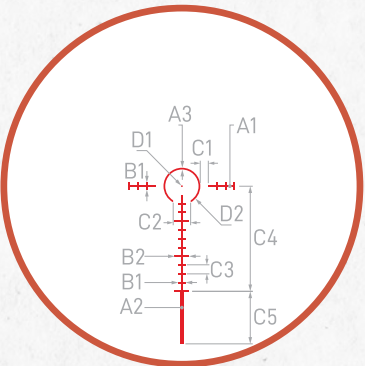

#### SUBTENSIONS IN MOA

A1	A2	A3	B1	B2	C1
0.6	1.8	1	4	8	4.5
C2	C3	C4	C5	D1	D2
10	5	60	30	1	21

### MIDAS TSP4 (RED/GREEN)

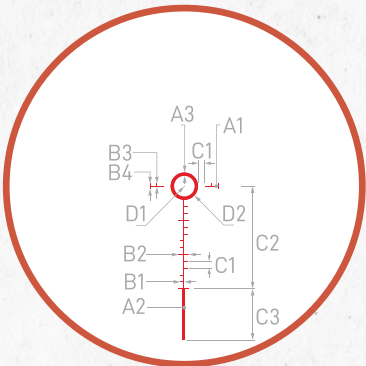

#### SUBTENSIONS IN MOA

A1	A2	A3	B1	B2	B3
0.45	1.5	2	2	6	1.5
B4	C1	C2	C3	D1	D2
3	4	30	60	0.5	16



MIDAS  
TRIPODS



Rock. Solid. Stability. Athlon's carbon fiber tripods come ready to support your rifle with the included bowl mount or ball head. The ball head features Friction Control, Fluid Pan Control, Ball Lock, and Arca compatibility for direct-to-rifle attachment. Three leg diameter options offer increasing stability and max support weight for spotting optics or as a weapon-mount platform.

For those that prefer a traditional center-shaft style tripod, the aluminum 28mm provides excellent stability and versatility, ideal for a dedicated spotting optic tripod.

PRODUCT SPECIFICATION

TRIPOD MODEL	HEAD STYLE	HEAD MOUNT	LEG MATERIAL	MAX LEG DIA.	MAX EXT. HEIGHT	LOWEST EXT. HEIGHT.	FOLDED HEIGHT	WEIGHT	MAX LOAD
CF40	BALL	ARCA-SWISS	CARBON FIBER	40 mm	1760 mm	280 mm	740 mm	8.4 lb	88 lb
CF36	BALL	ARCA-SWISS	CARBON FIBER	36 mm	1760 mm	250 mm	740 mm	7.7 lb	66 lb
CF32	BALL	ARCA-SWISS	CARBON FIBER	32.5 mm	1660 mm	250 mm	620 mm	5.6 lb	55 lb
CF29	BALL	ARCA-SWISS	CARBON FIBER	29 mm	1660 mm	360 mm	620 mm	5.5 lb	33 lb
AL28	BALL	ARCA-SWISS	ALUMINUM	28 mm	1760 mm	1540 mm	740 mm	5.1 lb	26 lb

TRIPOD HEAD PARTS

- 1

Quick Release Arca Plate
- 2

Quick Release Knob
- 3

Ball Lock Knob
- 4

Friction Control Knob
- 5

Fluid Pan Control Knob
- 6

Weight/Acessory Hook



BEST USED FOR

HUNTING

TARGET LONG RANGE

BIRD WATCHING

VISIT THE PRODUCT PAGE





PRECISION RINGS



DIAMETER	1"	30 mm	30 mm	30 mm
SIZE	MED	LOW	MED	MSR
HEIGHT	.9"	.89"	1.05"	1.443"
DIAMETER	34 mm	34 mm	34 mm	
SIZE	LOW	MED	MSR	
HEIGHT	.96"	1.16"	1.519"	

ARMOR RINGS



DIAMETER	1"	30 mm	30 mm	30 mm
SIZE	MED	LOW	MED	MSR
HEIGHT	.9"	.868"	.993"	1.443"
DIAMETER	34 mm	34 mm	34 mm	
SIZE	LOW	MED	MSR	
HEIGHT	.944"	1.069"	1.519"	

BINOCULAR HARNESS

The Athlon Optics Binocular Harness is the most functional, versatile binocular system on the market. It holds your binoculars tight to your chest, and is designed for quiet, one-handed use. With the multiple shoulder and neck adjustments, this allows the binocular harness to hold close to your chest and prevent sag and bounce when crawling or running. The harness allows for a full range of motion while the binoculars are in use.



KEY FEATURES

-   
Water Proof Material
-   
Quiet Material
-   
Quick & Easy Access
-   
Fits Most Binocular Sizes

OTHER FEATURES

Fold-Down Lid Retention, Magnetic Closure for Quiet Access, 4 Point Harness for All Day Comfort, Internal Mesh Pocket, Vented Shoulder Straps, Layered Interlock Close Mesh Side Pockets

AR TACTICAL CANTILEVERS



DIAMETER	30 mm	30 mm	34 mm
ANGLE (MOA)	0	20	20

ARMOR CANTILEVERS



DIAMETER	1"	30 mm	30 mm	34 mm	34 mm
ANGLE (MOA)	0	0	20	0	20

SCOPE SUNSHADES

Cronus BTR GEN2 UHD, Ares ETR, Ares BTR GEN2, Midas TAC, Midas HMR, Midas BTR GEN2, Helos BTR GEN2, Argos BTR GEN2, Talos BTR riflescopes.

Black matte surface finish, 4.5 inches long, sizes in 56, 50, 44mm.







## WHAT EXPERTS SAY ABOUT OUR OPTICS

EXPERTVOICE TESTIMONIALS

### ARGOS G2 HD RUGGED PIECE WITH CLEAR GLASS



"I grew up using cheap binoculars and didn't realize what I was missing out on until I got these. The glass is some of the clearest I've ever looked through, and the focus wheel makes it easy to pull detail from multiple individual targets at varying distances. The rugged design provides confidence that these will hold up for a good while under abuse and harsh outdoor conditions."

**Zain Hedrick**

### MIDAS TAC HD WINNER!!!!



"I've been issued lots of expensive glass mounted on expensive rifles and I have to say my Tikka 6.5cdm with the Athlon MIDAS is the best out of the box combination I've ever had. Never wanted a 6.5 as I've always been a .30cal kind of guy. Tikka is a great rifle but it's full capability is hard to recognize without a great scope. This is it!!!! Radical box test on the scope and four 3 shot groups that most people will never get in their life. I'm ordering a 2nd one ASAP."

**Anthony Adams**

### ARGOS BTR GEN2 IMPRESSIVE SCOPE



"Being new to this line, I was a little skeptical about how good could it be for the price. I took this scope to the range for a shoot. I have to say, this is very impressive. I mounted it to a Nosler 28 Carbon. Dialed it in and shot 40 rounds. Once set it held zero. Clarity was great from minimum to maximum zoom. Focus worked well. Target acquisition was quick and easy. I really tried to find something to not like but it really is that good. Ordered two more Athlon scopes today."

**Wendell M.**

### CRONUS BTR GEN2 UHD I OWN THREE OF THESE SCOPES



"I have people come up all the time at the range and ask to look through the glass on my scopes. I'm currently running a GEN2 on my Voodoo 22LR, a GEN1 on my CZ 457 22LR, and another GEN1 on my daughter's Bergara B14R (we shoot a lot of 22 competitions). I had a couple of guys say that the glass was as good as the Nightforce they were shooting last week. I have been really pleased so far with all Athlon products I've ever laid my hands on."

**John Mason**

### AR TACTICAL CANTILEVER SOLID ONE PIECE MOUNT



"What a nicely machined one-piece mount. Well designed and machined. Edges chamfered and the finish is consistent and bold. Absolutely recommend this to anyone looking for a well designed and fully functional rock-solid optic mount. It could be a touch lighter, but that is nothing to complain about with this mount."

**Rob Ginieczki**

### HELOS BTR FANTASTIC SCOPE



"Unbeatable price! You would have to spend triple the money to find something better. Large easy to read turrets with a good tactile feel. Tracks well and returns to zero. I put this on a duty rifle and fully trust my life to it. On top of that Athlons warranty department is top notch. I have dealt with them on a different scope I have. From start to finish in less than a week I had a new scope in my hand. I recommend this product to anyone looking for a duty or a competition optic"

**Michael Stripling**





**SHARP, TIGHT  
AND PRICED  
JUST RIGHT!**



801 N MEADOWBROOK DR.  
OLATHE, KS 66062

TOLL FREE: 1-855-913-5678  
contact@athlonoptics.com

[www.athlonoptics.com](http://www.athlonoptics.com)