

| PRODUCT | MODEL | RETICLE | SKU# |
|------------------|-------------|----------------|--------|
| TALOS RIFLESCOPE | 4-16x40 SFP | BDC 600 SFP IR | 215008 |

IDEAL APPLICATION



TOP FEATURES

NITROGEN PURGED

Paired with a completely sealed chassis, nitrogen gas is used to purge air from the optic to help maintain internal fog-proof and waterproof capabilities.

FULLY MULTI-COATED

Athlon Optic's fully multi-coated glass gives you better light transmission with optimum brightness and true color across the entire light spectrum.

WATERPROOF

Regardless of how heavy the rain is coming down or an accidental drop in the water, this sealed and gas-purged optic will remain waterproof.

ALL FEATURES


- FULLY MULTI-COATED LENSES
- NITROGEN PURGED
- AIRCRAFT GRADE ALUMINUM TUBE
- ILLUMINATED RETICLE
- ETCHED GLASS RETICLE
- WATERPROOF
- FOG PROOF
- SHOCKPROOF
- ONE PIECE TUBE CONSTRUCTION

SPECS

| | |
|----------------------------|--------------------|
| Power | 4-16X |
| Obj. Lens | 40 mm |
| Tube Size | 1 mm |
| Turrets | Capped |
| Eye Relief | 3.8-3.35" |
| FoV @100Y | 24.1-6.3 ft |
| Click Value | 0.25 MOA |
| Adjustment Per Rotation | 15 MOA |
| Total Elevation Adjustment | 50 MOA |
| Total Windage Adjustment | 50 MOA |
| Parallax Adjustment | Side Focus 10yds-∞ |
| Purging Material | Nitrogen |
| Weight | 19.1 oz |

DIMENSIONS

| L1 | L2 | L3 | L4 | L5 | L6 | D1 | D2 |
|-------|------|------|------|------|------|------|------|
| 12.9" | 3.5" | 5.8" | 3.7" | 1.9" | 2.2" | 1.8" | 1.9" |

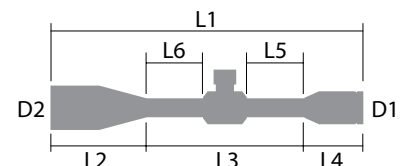

**SHARP, TIGHT
AND PRICED
JUST RIGHT!**