

# ATHLON

RIDICULOUSLY GOOD OPTICS

# 2025 PRODUCT CATALOG

BINOCULARS  
THERMALS  
RIFLESCOPES  
SPOTTING SCOPES  
RANGEFINDERS  
RED DOTS  
ACCESSORIES







## 8 BINOCULARS

### 11 Cronus G2 UHD

11 10x42  
11 15x56

### 12 Cronus UHD Rangefinding

12 10x50

### 15 Midas G2 UHD

15 12x50 Pro  
15 10x42 PRO Monocular  
16 10x25  
16 10x42, 8x42  
16 12x50, 10x50

### 19 Argos G2 UHD / HD

19 10x42, 8x42  
19 12x50, 10x50

### 20 Talos G2 HD

20 10x42, 8x42

### 23 Neos G2 HD

23 10x42, 8x42

### 25 Comparison Chart

## 26 THERMAL OPTICS

### 28 Cronus ATS PRO Thermal Scope

★ 28 35L-400  
★ 28 50L-640  
★ 28 35-400  
★ 28 50-640

### 31 Cronus ATS Monoculars

31 35M-400  
31 35ML-400

### 32 Cronus ATS PRO Clip On

★ 32 35C-400  
★ 32 35C-640  
★ 32 35CL-400  
★ 32 35CL-640

### 35 Comparison Chart

## 36 RIFLESCOPES

### 39 Cronus BTR GEN2 UHD

39 1-6x24 SFP  
39 4.5-29x56 FFP

### 40 Ares ETR GEN2 UHD

★ 40 1-10x24 FFP  
★ 43 4.5-30x56 FFP  
★ 43 15-60x56 SFP

### 44 Ares BTR GEN3 HD

★ 44 2.5-15x50 FFP  
★ 44 4.5-27x50 FFP

### 47 Midas TAC GEN2 HD/UHD

★ 47 4-16x44 FFP  
★ 47 5-30x56 FFP  
★ 47 6-24x50 FFP

### 48 Midas HMR HD

48 2.5-15x50 SFP

### 51 Midas BTR GEN2 HD

51 1-6x24 SFP  
51 4.5-27x50 SFP

### 52 Helos BTR / GEN2

52 1-4.5x24 SFP  
52 1-10x28 SFP  
55 2-12x42 FFP  
55 4-20x50 FFP  
55 6-24x56 FFP

### 56 Heras SPR

56 2-12x42 SFP  
56 4-20x50 SFP  
56 15-60x56 SFP  
59 6-24x56 SFP  
59 6-24x56 FFP

### 60 Argos BTR GEN3

★ 60 1-8x24 SFP  
★ 63 6-24x50 FFP  
★ 63 8-34x56 FFP  
★ 63 10-40x56 SFP

### 64 Argos HMR

64 2-12x42 SFP  
64 4-20x50 SFP

### 67 Talos BTR GEN2

67 1-4x24 SFP  
68 4-14x44 FFP  
68 10x42 SFP

### 71 Talos

71 1.5-5x32 SFP  
72 3-12x40 SFP  
72 4-16x40 SFP  
72 6-24x50 SFP

### 75 Neos

75 3-9x40 SFP  
75 4-12x40 SFP  
75 6-18x40 SFP

### 76 Comparison Chart

## 80 SPOTTING SCOPES

### 82 Cronus G2 UHD

82 20-60x86 - Dual Focus  
82 20-60x86 - 45 DEG  
85 7-42x60

### 86 Ares G2 UHD

86 15-45x60 - 45 DEG /STR  
86 22x Eyepiece  
89 20-60x85 - 45 DEG / STR

### 90 Argos HD

90 20-60x85 - 45 DEG / STR

### 93 Talos

93 20-60x80 - 45 DEG

### 95 Comparison Chart

## 96 RED DOT SIGHTS

### 98 Pistol Open Sights

★ 98 Midas EDC PRO  
★ 98 Midas Burst  
★ 98 Midas Beam  
98 Midas Flash  
98 Talos EDC  
★ 98 Talos EDC PRO

### 101 Red Dots

★ 101 Midas Blaze  
★ 101 Midas Strobe

### 102 Prism Scopes

★ 102 Midas Flare 1x  
★ 102 Midas Flare 3x  
★ 102 Midas Flare 5x

### 105 Magnifiers

105 Midas M3  
105 Midas M5

### 107 Comparison Chart

## 108 LASER RANGEFINDERS

## 112 TRIPODS

## 115 ACCESSORIES

## 116 RETICLE SUBTENSIONS

## 134 TESTIMONIALS



# KEY PRODUCT FEATURES



## EXTRA-LOW DISPERSION GLASS

Gives you an advantage with an image that has little or no chromatic fringe for the clearest and sharpest image.



## ESP DIELECTRIC COATING

Reflects over 99% of the light to your eyes bringing you a clear, bright image and accurate color reproduction.



## XPL COATING

Extra protection on the exterior lenses to prevent the scope from enduring dirt, oil, and potential scratches.



## APOCHROMATIC LENS SYSTEM

Helps in converging refracting colors into one focus point, producing greater contrast, sharpness, and color definition.



## MOTION SENSOR

Built in motion detector automatically wakes the product up from the sleep mode when a motion is detected.



## RUBBER ARMOR

Provides additional protection and a durable, secure, non-slip soft texture grip for any weather condition.



## NETD <50mK

Achieve precise thermal detection with the 50mK NetD sensor! 50mK sensitivity ensures accurate, reliable thermal imaging with great detail.



## HD GLASS

HD glass gives you better light transmission, and brighter and sharper images.



## ADVANCED FMC

Advanced Fully Multi-Coated lenses provide better light transmission with optimum brightness and true color across the entire spectrum.



## PHASE CORRECTED PRISMS

Special coating on prisms that produces images with better contrast, a higher resolution and better color reproduction.




## EXTENDED BATTERY LIFE

Offers 50,000 hours battery life at medium illumination setting.



## AUTO-BRIGHT TECHNOLOGY

Embedded light sensor adjusts the illumination setting automatically based on the ambient light.



## CUTTING-EDGE THERMAL SENSOR

The cutting-edge 12µm pixel thermal sensor offers a high-resolution thermal image and maximum detection range.



## 50HZ REFRESH RATE

Experience smooth, lag-free visuals with a 50Hz refresh rate. From scanning the horizon to chasing game, fast refresh rates, crisp fluid motion clarity.



## E2ES SYSTEM

A field flattening system that removes distortion on the outermost edge of the field of view.



## FULLY MULTI-COATED

Effectively reduces reflected light and increases the transmission of light giving you a brighter image than normal single coated lenses.



## BAK4 PRISMS

Produce a sharp, round exit pupil ultimately delivering higher light transmission and clarity to the edge of the image.



## LOCKING TURRETS

Allows you to pull up on your turret to dial and push down on the turret to lock it in place to avoid inadvertent adjustments.



## WATERPROOF

Regardless of how heavy the rain is coming down or an accidental drop in the water, this sealed and gas-purged optic will remain waterproof.



## HIGH-RESOLUTION OLED DISPLAY

A 0.39" OLED display with a 1440 x 1080 resolution provides a sharp, high contrast view with vivid color.



## 09+ HRS BATTERY LIFE

Blaze through the night with high capacity lithium-ion batteries providing over 9 hours of power.



## PRECISION ZERO STOP SYSTEM

Allows you to return to your initial zero position with a sharp and precise stop, right on your initial zero.



## NITROGEN PURGED

Nitrogen gas is used to purge air from the optic to help maintain internal fog-proof and waterproof capabilities.



## ARGON PURGED

Argon gas has a low thermal conductivity compared to nitrogen gas, resulting in better fog proof capabilities.



## SMART POWER MANAGEMENT

Smart Power Management System shuts the unit off when no adjustment is made in 6 hours. After a new battery is installed illumination is set at the last setting used.



## RAINPROOF

Don't let unexpected showers stop you. While not submersible, rainproof optics will shed water in the harshest conditions.



## WIFI & BLUETOOTH

Apple and Android Compatible app allows users to record audio, video, and download images directly to their personal device.



## BALLISTICS

Powered by Athlon's Ballistics App, providing accurate data for common calibers and cartridges, as well as custom loads.







# YOUR PRIZE IN OPTICS

ATHLON is a proud US sports optics product company devoted to designing and delivering superior quality optics, products, and outdoor accessories at a competitive price to our consumers via our distribution and retail channels. Athlon has strong engineering design capabilities, strategic alliances with quality manufacturers, and a streamlined fully integrated supply chain. These advantages enable us to bring the latest cutting edge technologies and cut out the extra layers of the traditional supply chain. With these advantages we are able to deliver goods and products to individual consumers' hands with great cost savings.

Our obsession with product quality and superior customer service for hunters, recreational shooters, and outdoor enthusiasts drives our business. The business model on which we founded Athlon allows us to deliver high quality optics at extremely competitive prices. Our goal from day one is to pass those savings to you, the outdoor enthusiast.

# LIFETIME WARRANTY

Your Athlon product is warranted to be free of defects in materials and workmanship for the lifetime of the product, Athlon will also repair or replace the product at no charge to you if you damage it through normal use. No receipt needed, no registration required. Athlon Optics is committed to providing the best product you can buy for your money. This warranty does not cover damages caused by deliberate damage, misuse, theft, or maintenance provided by someone other than the Athlon Authorized Service Department.



# NEW PRODUCTS FOR 2025



## RIFLESCOPES

### Ares ETR GEN2 UHD



1-10x24 FFP



4.5-30x56 FFP



15-60x56 SFP

### Ares BTR GEN3 HD



2.5-15x50 FFP



4.5-27x50 FFP

### Midas TAC GEN2 HD



4-16x44 FFP



6-24x50 FFP

### Midas TAC GEN2 UHD



5-30x56 FFP

### Argos BTR GEN3



1-8x24 SFP



6-24x50 FFP



8-34x56 FFP



10-40x56 SFP

## MONOCULARS



Midas 10x42 mm PRO Monocular

## THERMAL OPTICS



Cronus ATS PRO Thermal Scope 35-400



Cronus ATS PRO Thermal Scope 35L-400



Cronus ATS PRO Thermal Scope 50-640



Cronus ATS PRO Thermal Scope 50L-640



Cronus ATS PRO Clip On 35C-400 / 35C-640



Cronus ATS PRO Clip On 35CL-400 / 35CL-640

## RED DOTS



Midas EDC PRO



Midas Beam



Midas Burst



Talos EDC PRO



Midas Blaze



Midas Strobe



Midas Flare 1x



Midas Flare 3x




Midas Flare 5x





# BINOCULARS



BINOCULARS







# CRONUS G2 UHD



BINOCULARS | CRONUS G2 UHD



10 x 42 mm



15 x 56 mm

### PRODUCT FEATURES



Phase Coated, BAK4 Prisms (42mm), Abbe Prisms (56mm), Advanced Fully Multi-Coated Lenses, Magnesium Chassis, Locking Diopter, Long Eye Relief, Close Focus, Twist Up Eye-Cups, Waterproof, Tripod Adaptable

MODEL	SKU	FOV @1000 YDS
10 x 42 mm	111004	235 ft
15 x 56 mm	111005	338 ft

For full product specs, see page 25

We designed these binoculars with our revolutionary E2ES lens system which gives you a flat field of view. We included UHD glass resulting in a clearer & sharper image. Dielectric coating reflects 99% of the light through the prism assembly. Our lightweight Magnesium chassis helps lighten your load while maintaining ruggedness to withstand the scrapes & bumps of constant use. These Cronus binoculars can take a hit!

10 BEST USED FOR



athlonoptics.com

11





# CRONUS UHD - RANGEFINDING



10 x 50 mm



## PRODUCT FEATURES



Magnesium chassis, Phase Coated, BAK4 Prisms, Advanced Fully Multi-Coated Lenses, Long Eye Relief, Close Focus, Argon Purged, Twist Up Eye-Cups, Waterproof, Dual Units of Measurement (Y/M), Angle Compensation Mode

**MODEL**      **SKU**      **FOV @1000 YDS**      *For full product specs, see page 25*


10x50 mm      111020      338 ft      With ranging capabilities from 5 to 1000 yards on a deer and out to 2600 yards on a reflective target, these bins are perfect for any hunting or long range situation. Includes UHD glass that results in a clearer & sharper image as well as an illuminated ranging display.

**RANGING REFLECTIVE**      **RANGING DEER**      **ACCURACY**      **POWER SUPPLY**      **DISPLAY**

2600 Y      1000 Y      +/- 0.5 Y      CR2-3V      Red Illuminated OLED Display Screen





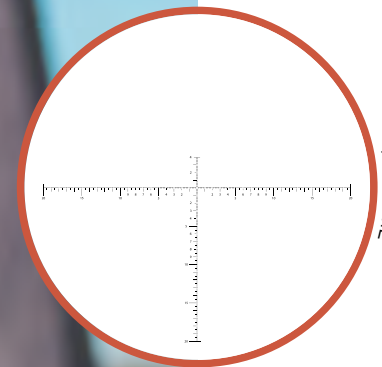

ATBR MIL

# MIDAS G2 UHD PRO



12x50 mm PRO



10x42 mm PRO Monocular

## PRODUCT FEATURES



UHD Glass, ESP Dielectric Coating, Magnesium Chassis, XPL Protective Coating, Phase Corrected Prisms, BAK4 Prisms on Binoculars, Advanced Fully Multi-coated, Lenses, Long Eye Relief, Close Focus, Twist Up Eyecups, Arca Plate for Easy Tripod Mounting, Waterproof, Argon Purged.

MODEL	SKU	FOV @1000 YDS	<i>For full product specs, see page 25</i>
12x50 mm	113011	281 ft	
10x42 mm Monocular	113015	340ft	

The Midas G2 Pro Family gives match shooters an edge by providing a massive field of view and ample magnification. Shooters also get to choose between the 12x50 Binos or 10x42 Monocular. Both have the ATBR reticle which provides a clean and unobtrusive view, ideal for providing corrections and ranging. Built on the proven performance and glass quality of the Midas line, the Midas G2 Pro is a winning combination for precision shooters.

BEST USED FOR







# MIDAS G2 UHD



12 x 50 mm / 10 x 50 mm



10 x 42 mm / 8 x 42 mm



10 x 25 mm

## PRODUCT FEATURES



Phase Coated, Magnesium Chassis, BAK4 Prisms, Advanced Fully Multi-Coated Lenses, Long Eye Relief, Close Focus, Twist Up Eye-Cups, Waterproof, Tripod Adaptable, ESP Dielectric Coating, Argon Purged

MODEL	SKU	FOV @1000 YARDS
12x50 mm	113006	281 ft
10x50 mm	113007	341 ft
10x42 mm	113008	341 ft
8x42 mm	113009	426 ft
10x25 mm	113010	285 ft

For full product specs, see page 25

Midas was known to have a golden touch. He must have laid his hands on these binoculars since they set the gold standard for this class of binoculars. The rugged benchmark for all-weather brightness and clarity, these Midas binoculars are light and slim thanks to the magnesium chassis. Together with UHD glass lenses, Advanced Fully Multi-Coated optics, and high-quality BaK-4 prisms, these Midas binoculars gather maximum light and produce brilliant color fidelity.



BEST USED FOR







# ARGOS G2 UHD / HD



10 x 42 mm / 8 x 42 mm (UHD)



10 x 42 mm / 8 x 42 mm (HD)



12 x 50 mm / 10 x 50 mm (HD)

## PRODUCT FEATURES



BAK4 Prisms, Advanced Fully Multi-Coated Lenses, Long Eye Relief, Close Focus, Twist Up Eye-Cups, Waterproof, Tripod Adaptable

MODEL	SKU	FOV @1000 YARDS	<i>For full product specs, see page 25</i>
HD 12x50 mm	114007	257 ft	The Argos G2 line features affordable options with HD or UHD glass, both with Advanced Fully Multi-Coated Optics for sharp contrast, true color and excellent light transmission. They also have Bak-4 prism glass with ESP Dielectric coating and phase correction for enhanced color fidelity and sharpness. All Argos G2 binoculars are Argon gas purged for waterproofing & non-fogging capabilities. The durable and ergonomic magnesium chassis takes weight off your neck but at the same time stands up to the demands of hunting in any conditions.
HD 10x50 mm	114008	304 ft	
HD 10x42 mm	114009	319 ft	
HD 8x42 mm	114010	371 ft	
UHD 10x42 mm	114011	319 ft	
UHD 8x42 mm	114012	371 ft	

BEST USED FOR





# TALOS G2 HD



10 x 42 mm / 8 x 42 mm

## PRODUCT FEATURES



Long Eye Relief, Close Focus, Twist Up Eye-Cups, Tripod Adaptable, Nitrogen Purged

MODEL	SKU	FOV @1000 YDS	<i>For full product specs, see page 25</i>
10 x 42 mm	115007	319 ft	<p>The Talos HD's Advanced Fully-Multicoated lenses paired with HD lenses provide optimum light transmission and true color representation unheard of at this price point. Low dispersion HD Glass significantly reduces chromatic aberration, delivering high clarity, contrast, and resolution. Next time a ridiculously big buck steps out of the shadows, catch him off guard and turn him into a wall hanger.</p>
8x42 mm	115008	371 ft	

BEST USED FOR







# NEOS G2 HD



10 x 42 mm / 8 x 42 mm

## PRODUCT FEATURES



Long Eye Relief, Close Focus, Twist Up Eye-Cups, Tripod Adaptable, Nitrogen Purged


MODEL	SKU	FOV @1000 YDS	<i>For full product specs, see page 25</i>
10 x 42 mm	116009	309 ft	<p>We build optics to withstand the elements, no matter what class of binos they are in. The Neos G2 series of weatherproof binoculars are built tough, with a composite chassis that's O-ring sealed and nitrogen purged for 100% waterproof/fog-proofing. Rubber armor gives you a grip in slippery situations. Fully Multi-coated optics and premium-quality BaK-4 prism glass maximize light transmission and image clarity.</p>
8x42 mm	116010	367 ft	



BEST USED FOR



The following table contains detailed specifications of all Athlon Optics Binoculars allowing you to compare them easily and find the right one for you.



MODEL	OBJECTIVE LENS DIAMETER	EYE RELIEF	RETICLES	FOV ANGULAR	FOV @1000 YARDS	CLOSE FOCUS	INTERPUPILLARY DISTANCE	WEIGHT	DIMENSIONS	
									HEIGHT	WIDTH
<b>CRONUS G2 UHD</b>										
15x56 mm	56 mm	18.5 mm	/	4.5°	235 ft	13.1 ft	59-74 mm	45.2 oz	8.7"	6.2"
10x42 mm	42 mm	19.3 mm	/	6.5°	338 ft	338 ft	56-73 mm	27.8 oz	6.3"	5.1"
<b>CRONUS UHD RANGEFINDING</b>										
10x50 mm	50 mm	17 mm	/	6.2°	338 ft	9.8 ft	58-76 mm	38.0 oz	6.7"	5.4"
<b>MIDAS G2 UHD</b>										
12x50 mm PRO	50 mm	15.0 mm	ATBR MIL	5.4°	281 ft	11.5 ft	59-74 mm	30.5 oz	6.5"	5.1"
10x42 mm PRO Monocular	42 mm	15.2 mm	ATBR MIL	6.5°	340 ft	6.3 ft	/	15.5 oz	3.3" (5.5" L)	2.3"
12x50 mm	50 mm	15.0 mm	/	5.4°	281 ft	11.5 ft	59-74 mm	32 oz	6.7"	5.4"
10x50 mm	50 mm	16.9 mm	/	6.5°	341 ft	9.8 ft	59-74 mm	32 oz	6.7"	5.4"
10x42 mm	42 mm	15.2 mm	/	6.5°	341 ft	8.2 ft	57-74 mm	23.3 oz	5.7"	5.2"
8x42 mm	42 mm	17.2 mm	/	8.1°	426 ft	6.5 ft	57-74 mm	23.3 oz	5.7"	5.2"
10x25 mm	25 mm	15.5 mm	/	5.4°	285 ft	5.2 ft	56-74 mm	8.3 oz	4.3"	4.1"
<b>ARGOS G2 HD</b>										
12x50 mm	50 mm	16.0 mm	/	4.9°	257 ft	13 ft	56-76 mm	31.5 oz	6.8"	5.6"
10x50 mm	50 mm	17.0 mm	/	5.8°	304 ft	13 ft	56-76 mm	31.5 oz	6.8"	5.6"
10x42 mm	42 mm	16.1 mm	/	6.1°	319 ft	13 ft	56-76 mm	25.5 oz	5.7"	5.3"
8x42 mm	42 mm	17.3 mm	/	7.1°	371 ft	13 ft	56-76 mm	25.5 oz	5.7"	5.3"
<b>ARGOS G2 UHD</b>										
10x42 mm	42 mm	16.1 mm	/	6.1°	319 ft	13 ft	56-76 mm	25.5 oz	5.7"	5.3"
8x42 mm	42 mm	17.3 mm	/	7.1°	371 ft	13 ft	56-76 mm	25.5 oz	5.7"	5.3"
<b>TALOS G2 HD</b>										
10x42 mm	42 mm	16.1 mm	/	6.1°	319 ft	13.1 ft	56-76 mm	20.8 oz	5.7"	5.0"
8x42 mm	42 mm	17.9 mm	/	7.1°	371 ft	13.1 ft	56-76 mm	20.8 oz	5.7"	5.0"
<b>NEOS G2 HD</b>										
10x42 mm	42 mm	14.1 mm	/	5.9°	309 ft	13.1 ft	56-72 mm	21 oz	5.9"	4.9"
8x42 mm	42 mm	17 mm	/	7.0°	367 ft	13.1 ft	56-72 mm	21 oz	5.9"	4.9"





# THERMALS



THERMALS



athlonoptics.com





# CRONUS ATS PRO



35-400 - NEW



50-640 - NEW



35L-400 - NEW



50L-640 - NEW

## PRODUCT FEATURES



Cutting-edge Thermal Sensor, High-resolution OLED Display, Wifi & Bluetooth, 10 Built-in Interchangeable Reticles, 10 Illumination Settings, 128 GB Memory Capacity, Auto Power-OFF, 7 Color Palette Options, 10 Detection Sensitivity, Auto Shot Record, One Shot Zero, Eco Mode, Waterproof, Fog Proof, Shockproof, Long Battery Life.

POWER X OBJ. LENS	SKU	RETICLES	
35-400	210138	5 MOA & 5 MIL RETICLES	<i>For full product specs, see page 35</i>
50-640	210139	5 MOA & 5 MIL RETICLES	
35L-400	210136	5 MOA & 5 MIL RETICLES	
50L-640	210137	5 MOA & 5 MIL RETICLES	

The flagship in Athlon's Cronus ATS line of thermal optics just got better. The Pro model provides the same exceptional performance as the original, now with an internal ballistic calculator that provides real-time holdover data to make the perfect shot. Users can create 10 customizable profiles to quickly access your favorite ballistic and reticle combinations. Select models include a built-in laser rangefinder to quickly and accurately measure the distance to your subject. 12µ pixel pitch thermal sensor paired with a 1440p display provides a high-definition experience with stunning detail and crystal-clear resolution.

## BUILT-IN BALLISTICS CALCULATOR

Powered by Athlon's Ballistics App, providing accurate data for common calibers and cartridges, as well as custom loads. Cronus ATS optics easily pair to the Athlon Thermal app to provide an alternative interface to control your thermal optic.







BEST USED FOR



# CRONUS ATS MONOCULARS



THERMALS | CRONUS ATS MONOCULARS




35M-400



35ML-400

## PRODUCT FEATURES



Cutting-Edge Thermal Sensor, High-Resolution OLED Display, Wifi, 5 Illumination Settings, Auto Power-off, 5 Color Palette Options, Hot Spot Tracking, Waterproof, Fog Proof, Shockproof, Long Battery Life

MODEL	SKU	SENSOR RESOLUTION	<i>For full product specs, see page 35</i>
35M-400	210133	400 x 300 @12µm	Completely covert, Athlon Cronus ATS thermal monoculars create a vivid scene based on heat radiation signatures. Unlike night vision, these require no light source. From predator hunting to surveillance, the Athlon monoculars cut through the night. Paired with Athlon Thermal APP, users can make changes to the Cronus ATS monocular, record and save photos and videos from their hunt.
35ML-400	210134	400 x 300 @12µm	

athlonoptics.com





# CRONUS ATS PRO CLIP-ON




35C-400 - NEW  
35C-640 - NEW



35CL-400 - NEW  
35CL-640 - NEW

## PRODUCT FEATURES



Fog Proof, Shockproof, 32 GB Memory Capacity, WiFi, Auto Power-OFF, 7 Color Palette Options, Smart Video Recording, OLED Display, Eco-Mode, Auto-Shot, Ballistics Calculator

MODEL	SKU	THERMAL SENSOR	<i>For full product specs, see page 35</i>
35C-400	210140	400x300 @ 12µm	Convert your current riflescope into a thermal powerhouse, providing clear and detailed thermal images, even in complete darkness. Mount to picatinny rails with the included QD mount, or attach seamlessly to a variety of daytime scopes with an optional adapter (sold separately). A user-friendly interface allows for quick adjustments in the field. Supported by Athlon's ballistic app, and built-in laser rangefinder (laser rangefinder only available on 35CL-400 and 35CL-640) you can quickly determine how far your target is and display accurate MOA or MIL data on screen to make a precise shot.
35C-640	210141	640x512 @ 12µm	
35CL-400	210142	400x300 @ 12µm	
35CL-640	210143	640x512 @ 12µm	



## BUILT-IN BALLISTICS CALCULATOR

Powered by Athlon's Ballistics App, providing accurate data for common calibers and cartridges, as well as custom loads. Cronus ATS optics easily pair to the Athlon Thermal app to provide an alternative interface to control your thermal optic.



THERMALS | CRONUS ATS PRO CLIP-ON

NEW

athlonoptics.com



BEST USED FOR







# COMPARISON CHART



The following table contains detailed specifications of all Athlon Thermal Optics allowing you to compare them easily and find the right one for you.

POWER X OBJ. LENS	THERMAL SENSOR	RESOLUTION	AVAILABLE RETICLES	EYE RELIEF	FOV	BASE MAGN.	COMBINED MAGN.	DISTANCE MEASUREMENT	WEIGHT	LENGTH
-------------------	----------------	------------	--------------------	------------	-----	------------	----------------	----------------------	--------	--------

CRONUS ATS PRO										
35-400	400×300 @ 12µm	1440×1080	5 MOA & 5 MIL RETICLES	1.9"	7.8° × 5.9°	3.3x	13.2x	Stadiametric Ranging	37.4 oz	14.3"
50-640	640×480 @ 12µm	1440×1080	5 MOA & 5 MIL RETICLES	1.9"	8.8° × 6.6°	2.95x	23.6x	Stadiametric Ranging	37.7 oz	14.7"
35L-400	400×300 @ 12µm	1440×1080	5 MOA & 5 MIL RETICLES	1.9"	7.8° × 5.9°	3.3x	13.2x	Laser Ranging 10-1600 (±1) Yards	41.3 oz	14.3"
50L-640	640×480 @ 12µm	1440×1080	5 MOA & 5 MIL RETICLES	1.9"	8.8° × 6.6°	2.95x	23.6x	Laser Ranging 10-1600 (±1) Yards	42.3 oz	14.7"

MODEL	THERMAL SENSOR	DISPLAY RESOLUTION	FOV	MAGNIFICATION	NETD	DETECTION RANGE	RECOGNITION RANGE	WEIGHT	LENGTH
-------	----------------	--------------------	-----	---------------	------	-----------------	-------------------	--------	--------

CRONUS ATS MONOCULARS									
35M-400	400×300 @ 12µm	640×400	7.5° × 5.6°	2.6 -10.4x	≤50mK @ 77°F	3000 y	1100 y	12.3 oz	5.9"
35ML-400	400×300 @ 12µm	640×400	7.5° × 5.6°	2.6 -10.4x	≤50mK @ 77°F	3000 y	1100 y	14.8 oz	5.9"

MODEL	THERMAL SENSOR	DISPLAY RESOLUTION	FOV	EYEPIECE MAGNIFICATION	EYE RELIEF	DISTANCE MEASUREMENT	WEIGHT	LENGTH
-------	----------------	--------------------	-----	------------------------	------------	----------------------	--------	--------

CRONUS ATS PRO CLIP-ON								
35C-400	400×300 @ 12µm	1200×900	7.8° × 5.9°	6.4x	0.8"	Stadiametric Ranging	16.7 oz	5.2"
35C-640	640×512 @ 12µm	1280×960	12.5° × 9.4°	9.5x	0.8"	Stadiametric Ranging	17.2 oz	5.2"
35CL-400	400×300 @ 12µm	1200×900	7.8° × 5.9°	6.4x	0.8"	Laser Ranging 10-1600 (±1) Yards	16.5 oz	5.2"
35CL-640	640×512 @ 12µm	1280×960	12.5° × 9.4°	9.5x	0.8"	Laser Ranging 10-1600 (±1) Yards	17 oz	5.2"






# RIFLESCOPES




RIFLESCOPES






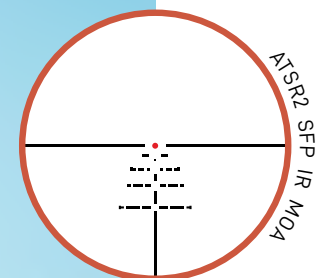


ATSR2 SFP IR MOA

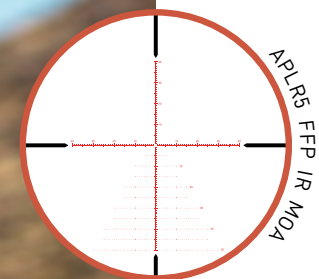

APLR5 FFP IR MOA



APRS1 FFP IR MIL



APRS6 FFP IR MIL

# CRONUS BTR GEN2 UHD



1-6x24 SFP



4.5-29x56 FFP

## PRODUCT FEATURES

only 4.5-29x56 | \*\* only 1-6x24



Argon Purged, High Precision Erector System, Aircraft Grade Aluminum Tube, Side Parallax Adjustment (4.5-29), Illuminated Reticles, Etched Glass Reticles, Exposed Turrets, Waterproof

POWER X OBJ. LENS	SKU	RETICLES	<i>For full product specs, see page 76</i>
1-6x24 SFP	210201	ATSR2 SFP IR MOA	A titan in long range precision. Poor weather and low light conditions are no match for UHD extra-low dispersion lenses. Cut through mirage and leave the competition in the dust. From precision shooting to the most demanding hunt, the Cronus BTR GEN2 is up to the challenge. The next generation of the Cronus BTR is now equipped with our applauded internal stainless-steel component turret design producing sharp, loud, tactile clicks.
	210113	APLR5 FFP IR MOA	
4.5-29x56 FFP	210114	APRS1 FFP IR MIL	
	210115	APRS6 FFP IR MIL	







# ARES ETR GEN2 UHD




1X - ATMR3 FFP IR MIL




10X - ATMR3 FFP IR MIL



1-10x24 FFP - NEW



ATMR2 FFP IR MOA



ATMR3 FFP IR MIL



## PRODUCT FEATURES






UHD Glass; Advanced Fully Multi-coated Lenses; Argon Purged; XPL Coating; Locking Elevation Turret; High Precision Erector System; Aircraft Grade Aluminum Tube; One Piece Tube Construction; Illuminated Reticle; Etched Glass Reticle; Waterproof; Fog Proof; Shockproof.

POWER X OBJ. LENS	SKU	RETICLES	<i>For full product specs, see page 76</i>
1-10x24 FFP	212109	ATMR2 FFP IR MOA	The Ares ETR GEN2 UHD 1-10x24 is one of the most versatile scopes on the market. The Ultra High-Definition glass offers stunning clarity. Features include a Precision Zero-Stop, an Aircraft-Grade Aluminum tube, & XPL Protective Coating. The Ares ETR GEN2 is perfectly suited for everything from close-range engagements to mid-range target shooting.
	212110	ATMR3 FFP IR MIL	





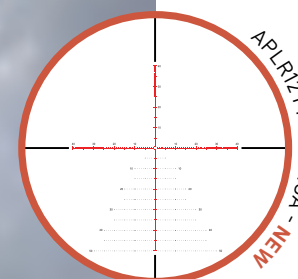

# ARES ETR GEN2 UHD



4.5-30x56 FFP - NEW



15-60x56 SFP - NEW

## PRODUCT FEATURES



XPL coating, Locking Windage Turret, High Precision Erector System, Aircraft Grade Aluminum Tube, Side Parallax Adjustment, Illuminated Reticle, Etched Glass Reticle, Exposed Turrets, Waterproof, Fog Proof

POWER X OBJ. LENS	SKU	RETICLES
4.5-30x56 FFP	212113	APLR12 FFP IR MOA
	212114	APRS12 FFP IR MIL
15-60x56 SFP	212117	ABLR3 SFP IR MOA

For full product specs, see page 76

The Ares ETR GEN2 UHD builds on the strength and successes of the previous generation while offering a fresh new look. Key features include: an Illuminated Etched Glass reticle, a Precision Zero-Stop, and UHD glass for optimum brightness and clarity. The new Ares ETR is perfect for a wide range of applications – everything from hunting to precision long-range competitions.









# ARES BTR GEN3 HD



2.5-15x50 FFP - NEW



4.5-27x50 FFP - NEW

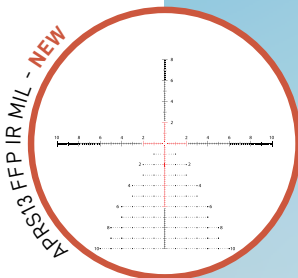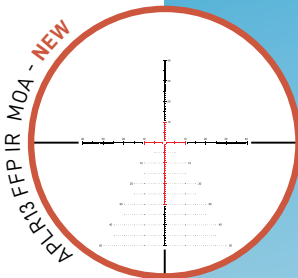

## PRODUCT FEATURES



XPL coating, High Precision Erector System, Aircraft Grade Aluminum Tube, One Piece Tube Construction, Side Parallax Adjustment, Illuminated Reticle, Etched Glass Reticle, Exposed Turrets, Waterproof, Fog Proof

POWER X OBJ. LENS	SKU	RETICLES
2.5-15x50 FFP	212014	APLR13 FFP IR MOA
	212015	APRS13 FFP IR MIL
4.5-27x50 FFP	212016	APLR13 FFP IR MOA
	212017	APRS13 FFP IR MIL

The Ares BTR GEN3 HD is the latest and greatest from the Ares line of riflescopes, and it's here to offer a long list of top-tier features without breaking the bank. Key among them are HD Glass, Advanced Fully Multi-Coated Lenses, a Precision Zero-Stop, and an Illuminated Etched Glass reticle. Whether you're nailing targets at the range, or on your next hunt, you'll appreciate the quality craftsmanship of the new Ares BTR GEN3.

For full product specs, see page 76







# MIDAS TAC GEN2 HD/UHD

RIFLESCOPIES | MIDAS TAC GEN2 HD / UHD


NEW

athlonoptics.com


47




APRS14 FFP MIL - NEW

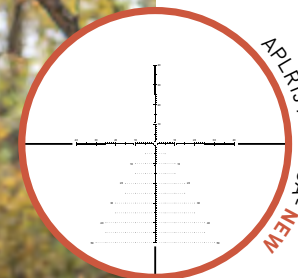


APLR15 FFP MOA - NEW



APRS15 FFP MIL - NEW

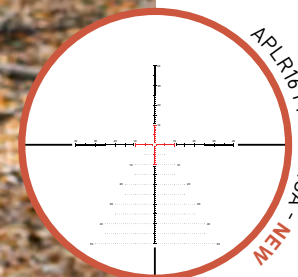

APLR16 FFP IR MOA - NEW



APRS16 FFP IR MIL - NEW



4-16x44 FFP - NEW



6-24x50 FFP - NEW



5-30x56 FFP - NEW

## PRODUCT FEATURES



POWER X OBJ. LENS	SKU	RETICLES
4-16x44 FFP	213083	APRS14 FFP MIL
	213084	APRS14 FFP MIL
6-24x50 FFP	213085	APLR15 FFP MOA
	213086	APRS15 FFP MIL
5-30x56 FFP	213087	APLR16 FFP IR MOA
	213088	APRS16 FFP IR MIL

XPL coating, High Precision Erector System, Aircraft Grade Aluminum Tube, One Piece Tube Construction, Illuminated Reticles (on certain models), Side Parallax Adjustment, Etched Glass Reticle, Waterproof, Fog Proof

\*only 5-30x56 FFP

For full product specs, see page 76

The Midas TAC GEN2 builds on the reputation of the previous Midas TAC line and strikes the perfect balance between price and performance. Key features include: a First Focal Plane Etched Glass reticle, specially coated HD/UHD glass, a Precision Zero-Stop, and side parallax adjustment. The Midas TAC GEN2 has a versatile magnification range and is perfectly suited for encounters deep in the woods or long-range targets at the range.

BEST USED FOR



46







# MIDAS HMR HD



2.5-15x50 SFP



## PRODUCT FEATURES



XPL Protective Coating, High Precision Erector System, Aircraft Grade Aluminum Tube, Side Parallax Adjustment, Illuminated Reticles, Etched Glass Reticles, Waterproof, Fog Proof, Shockproof


POWER X OBJ. LENS	SKU	RETICLES
2.5-15x50 SFP	213050	AHMR SFP IR MOA
	213051	BDC 600A

For full product specs, see page 76


The Midas HMR riflescope line features HD glass & Advanced Fully Multi-Coated lenses, that deliver crisp bright images & accurate results all day long. Both elevation and windage turrets are capped to make sure nothing gets bumped after you set your zero. You can always count on the Midas HMR to deliver the final punch.









ATSR16 SFP IR MOA



ATSR4 SFP IR MOA



AHMR SFP IR MOA



APRS4 SFP IR MIL

# MIDAS BTR GEN2 HD



1-6x24 SFP



4.5-27x50 SFP

## PRODUCT FEATURES



XPL Protective Coating, High Precision Erector System, Argon Purged, Aircraft Grade Aluminum Tube, Side Parallax Adjustment, Illuminated Reticles, Etched Glass Reticles, Waterproof, Fog Proof, Shockproof

POWER X OBJ. LENS	SKU	RETICLES
1-6x24 SFP	213013	ATSR4 SFP IR MOA
	213014	ATSR16 SFP IR MOA
4.5-27x50 SFP	213023	AHMR SFP IR MOA
	213024	APRS4 SFP IR MIL

For full product specs, see page 77

Whether you are shooting small targets at a few hundred yards, shooting 3-gun matches, or hunting big game anywhere in the world, the Midas BTR GEN2 line will be the perfect option for you. It features HD glass equipped with our Advanced Fully Multi-Coated lenses so you'll have the brightest, clearest image possible in any situation. You won't find a better option on the market for any of your applications. The innovative XPL coating protects your lenses from oil, dirt and smudges.









# HELOS BTR / GEN2



1-10x28 GEN2 SFP



1-4.5x24 SFP

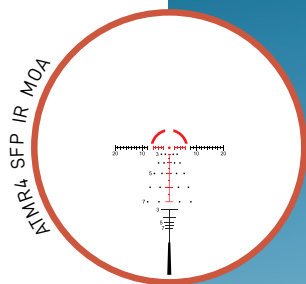

## PRODUCT FEATURES

\*1-10x28 only, \*\*1-4.5x24 only



High Precision Erector System, Aircraft Grade Aluminum Tube, Illuminated, Reticle, Etched Glass Reticle, Capped Turrets\*, Revolution Lock\*\*, Exposed Turrets\*\*, Side Parallax Adjustment\*\*


POWER X OBJ. LENS	SKU	RETICLES	<i>For full product specs, see page 77</i>
1-10x28 SFP	213013	ATMR4 SFP IR MOA	The Helos BTR GEN2 1-10x28 is perfect for tactical shooters looking for the latest trend in optics at an affordable price. Accurately assess and engage silhouette-sized targets out to 700 yards with the ATMR4 SFP IR MOA reticle. The Helos BTR 1-4.5x24 is specially designed for service rifle matches and AR platforms with short and mid-range applications in mind. The scope is loaded with robust turrets that have 23 MOA travel-per-rotation, true zero stop and revolution locking feature that eliminates any second-guessing which turn you are at on your elevation turret.
1-4.5x24 SFP	213023	ATSR3 SFP IR MOA	









AHMR2 FFP IR MOA



AHMR2 FFP IR MIL

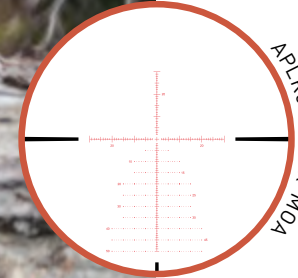

APLR6 FFP IR MOA

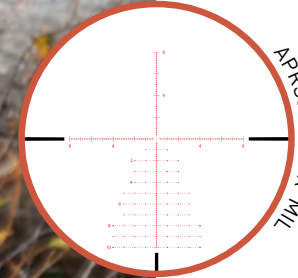

APRS6 FFP IR MIL

# HELOS BTR GEN2



2-12x42 FFP



4-20x50 FFP



6-24x56 FFP

### PRODUCT FEATURES



High Precision Erector System, Argon Purged, Aircraft Grade Aluminum Tube, Side Parallax Adjustment, Illuminated Reticles, Etched Glass Reticles, Exposed/Locking Turrets, Waterproof, Fog Proof, Shockproof

POWER X OBJ. LENS	SKU	RETICLES
2-12x42 FFP	214104	AHMR2 FFP IR MOA
	214105	AHMR2 FFP IR MIL
4-20x50 FFP	214108	APLR6 FFP IR MOA
	214109	APRS6 FFP IR MIL
6-24x56 FFP	214113	APLR6 FFP IR MOA
	214114	APRS6 FFP IR MIL

For full product specs, see page 77

Affordable, solid, and reliable are seldom associated with long range shooting and hunting. The Helos BTR GEN2 is the exception. Advanced Fully Multi-Coated lenses and XPL coatings balance out this optic for a wide variety of conditions, and deliver a bright and crisp view. Cross-over features such as Locking turrets are not just for hunting, they instill confidence in mid to long range shooters as well.







# HERAS SPR



2-12x42 SFP

4-20x50 SFP

15-60x56 SFP

## PRODUCT FEATURES

\* Locking Feature on Windage only






Advanced Fully Multi-Coated Lenses, Argon Purged, High Precision Erector System, Aircraft Grade Aluminum, Non-Illuminated Reticles, Etched Glass Reticles, Exposed Turrets, Fogproof, Waterproof

POWER X OBJ. LENS	SKU	RETICLES
2-12x42 SFP	214501	AAGR1 SFP MOA
	214502	AAGR1 SFP MIL
4-20x50 SFP	214505	AAGR2 SFP MOA
	214506	AAGR2 SFP MIL
15-60x56 SFP	214514	BLR2 SFP MOA

For full product specs, see page 77


The Heras SPR line pushes the envelope with features previously unheard of at this price point. Incorporating an adjustable elevation turret, locking windage turret, and MOA and MIL second focal plane reticle options provide modern hunters with a new approach for shots on long-range game. Featuring a parallax adjustment from infinity to a minimum distance of 10 yards, suitable for use on long-range magnum rifles and close-range airguns alike!




BEST USED FOR








APLR7 SFP IR MOA




APRS7 SFP IR MIL



APRS8 SFP IR MIL



APLR9 FFP IR MOA



APRS9 FFP IR MIL

# HERAS SPR



6-24x56 SFP / FFP



## PRODUCT FEATURES

\* Locking Feature on Windage only



High Precision Erector System, Advanced Fully Multi-Coated Lenses, Aircraft Grade Aluminum, Side Parallax Adjustment, Illuminated Reticles, Etched Glass Reticles, Exposed Turrets, Waterproof

POWER X OBJ. LENS	SKU	RETICLES
6-24x56 SFP	214508	APLR7 SFP IR MOA
	214509	APRS7 SFP IR MIL
	214510	APRS8 SFP IR MIL
6-24x56 FFP	214512	APLR9 FFP IR MOA
	214513	APRS9 FFP IR MIL

For full product specs, see page 77

Push your small caliber firearm or airgun to new distances with a wide high magnification range of 6-24X. Incorporating an adjustable elevation turret, locking windage turret, and MOA and MIL reticle options provide modern hunters with a new approach for shots on long-range game. While still featuring a minimum parallax of 10 yards out to infinity, the 6-24X is the only magnification range in the Heras SPR line to feature both SFP and FFP options.

BEST USED FOR







# ARGOS BTR GEN3



1-8x24 SFP - NEW



ATMR4 SFP IR MOA

## PRODUCT FEATURES



High Precision Erector System, Aircraft Grade Aluminum Tube, Illuminated Reticle, Etched Glass Reticle


POWER X OBJ. LENS	SKU	RETICLES
1-8x24 SFP	214073	ATSR5 SFP IR MOA

The Argos BTR GEN3 1-8x24 is a highly capable LPVO and it's available at a price point that won't break the bank. The reticle functions like a red dot with an illuminated center horseshoe for close-range engagements and holdovers provide a quick reference for mid-range shooting. The versatility of the Argos BTR GEN3 1-8x24 makes it an excellent option for 3-Gun.


For full product specs, see page 77








APLR11 FFP IR MOA - NEW



APRS11 FFP IR MIL - NEW



ABLR4 SFP MOA - NEW

# ARGOS BTR GEN3



6-24x50 FFP - NEW



8-34x56 FFP - NEW



10-40x56 SFP - NEW

## PRODUCT FEATURES



High Precision Erector System, Precision Zero Stop, Aircraft Grade Aluminum Tube, One Piece Tube Construction, Argon Purged, Side Parallax Adjustment, Etched Glass Reticles, Waterproof, Fog Proof, Shockproof

POWER X OBJ. LENS	SKU	RETICLES
6-24x50 FFP	214074	APLR11 FFP IR MOA
	214075	APRS11 FFP IR MIL
8-34x56 FFP	214076	APLR11 FFP IR MOA
	214077	APRS11 FFP IR MIL
10-40x56 SFP	214078	ABLR4 SFP MOA

For full product specs, see page 77

The Argos BTR GEN3 gets a significant upgrade in the next generation. Redesigned turrets and an improved magnification adjustment ring offer an enhanced experience, along with a fresh, new look. Key features include: XPL Coating, a Precision Zero-Stop, Advanced Fully Multi-Coated Lenses, and parallax adjustment from 10 yards to infinity. The Argos BTR GEN3 is the perfect option for those looking to get into PRS or long-range shooting on a budget.







# ARGOS HMR



2-12x42 SFP



4-20x50 SFP

## PRODUCT FEATURES







Advanced Fully Multi-coated Lenses, Argon Purged, Aircraft Grade Aluminum Tube, Etched Glass Reticle, Waterproof, Fog Proof, Shockproof, One Piece Tube Construction


POWER X OBJ. LENS	SKU	RETICLES
2-12x42 SFP	214003	BDC 600
	214004	BDC 600A
	214008	AHMC SFP MOA
	214005	MIL-DOT SFP MIL
4-20x50 SFP	214006	BDC 600A
	214007	AHMC SFP MOA

*For full product specs, see page 78*


The Argos HMR is designed from the ground up with the average outdoorsman in mind. This compact and durable hunting scope is a feature-rich, yet affordable option. 5x and 6x magnification ratios are ideally suited for a wide variety of close- and long-range hunting. Advanced Fully Multi-Coated lenses paired with clean and concise reticles like an illuminated center-dot crosshair, Mil-Dot, or BDC reticle options for a fool-proof traditional setup.








ATMR6 SFP IR MOA



AHSR14 SFP IR MIL



ATMR7 SFP IR MIL

# TALOS BTR GEN2



1-4x24 SFP



## PRODUCT FEATURES



Fully Multi-coated Lenses, Nitrogen Purged, Aircraft Grade Aluminum Tube, Illuminated Reticle, Etched Glass Reticle, Waterproof, Fog Proof, Shockproof, One Piece Tube Construction

POWER X OBJ. LENS	SKU	RETICLES
1-4x24 SFP	215024	ATMR6 SFP IR MOA
	215026	AHSR14 SFP IR MIL
	215027	ATMR7 SFP IR MIL

*For full product specs, see page 78*

An affordable entry into the world of Low Power Variable Optics. The Talos BTR GEN2 1-4x24 is as suitable for any AR-15 as it is for a short-range bolt action hunting rifle. On it's lowest magnification setting you can expect extremely fast target acquisition, with enough magnification to engage mid-range distances. Rugged and ready, capped turrets and illuminated reticles add to the dependability and versatility of this optic.












# TALOS BTR GEN2



4-14x44 FFP



10x42 SFP



## PRODUCT FEATURES



Fully Multi-coated Lenses, Precision Zero Stop, Nitrogen Purged, Aircraft Grade Aluminum Tube, Etched Glass Reticle, Waterproof, Shockproof, Fog Proof, One Piece Tube Construction


POWER X OBJ. LENS	SKU	RETICLES
4-14x44 FFP	215029	APLR2 FFP IR MIL
	215030	APLR10 FFP IR MOA
	215031	APRS10 FFP IR MIL
10x42 SFP	215032	AAGR1 SFP MOA
	215033	APRS2A SFP MIL

For full product specs, see page 78

While our Talos 4-14x44 broke new ground as one of the first affordable first-focal plane optics, our 10x42 fixed magnification scope will appeal to a more traditional hunting audience and those whose competition disciplines require its parameters. Features include Fully Multi-coated Lenses, Precision Zero Stop, an Aircraft Grade Aluminum Tube, and Etched Glass Reticles. These scopes are packed with performance-enhancing features that you are sure to appreciate all while maintaining repeatable tracking at an affordable price!







CB100 SFP IR MOA

# TALOS CROSSBOW



1.5-5x32 SFP



## PRODUCT FEATURES



Fully Multi-coated Lenses, Nitrogen Purged, Aircraft Grade Aluminum Tube, Illuminated Reticle, Etched Glass Reticle, Waterproof, Fog Proof, Shockproof, One Piece Tube Construction

POWER X OBJ. LENS	SKU	RETICLES	
1.5-5x32 SFP	215014	CB100 SFP IR MOA	<i>For full product specs, see page 78</i>

A crossbow scope with low-light performance, repeatable adjustments, and dependability to perform for seasons to come! Your next buck isn't safe out to 100 yards with the CB100 reticles accurate holds from 20-100 yards.

BEST USED FOR







# TALOS



3-12x40 SFP

4-16x40 SFP

6-24x50 SFP

## PRODUCT FEATURES







Fully Multi-coated Lenses, Nitrogen Purged, Aircraft Grade Aluminum Tube, Side Parallax Adjustment (select models), Waterproof, Fog Proof, Shockproof, One Piece Tube Construction

POWER X OBJ. LENS	SKU	RETICLES
3-12x40 SFP SHOTGUN	215001	BDC 600 IR
	215003	CENTER X
	215004	MIL-DOT
	215005	BDC 250 SHOTGUN IR
4-16x40 SFP	215008	BDC 600 IR
	215009	MIL-DOT
6-24x50 SFP	215012	BDC 600 IR
	215013	ATMR1 SFP IR MIL

*For full product specs, see page 78*




If you ask any hunter they'll tell you they have filled more tags in the low-light hours than any other time. With that said, it would be wise to design a scope to excel in early-morning and late-evening light. The Talos scope does just that with Fully Multi-Coated lenses for clarity and brightness in low light, so you'll be able to add precious minutes to every hunting day. These scopes, with their 4X magnification range, will give you great versatility whether you are hunting whitetails in the dense forest or prairie dogs in the wide open ranges.



BEST USED FOR







3-9x40 SFP



4-12x40 SFP



6-18x44 SFP

### PRODUCT FEATURES



Aircraft Grade Aluminum Tube, Side Parallax Adjustment (select models), Illuminated Etched Glass Reticles, Nitrogen Purged

POWER X OBJ. LENS	SKU	RETICLES
3-9x40 SFP	216001	CENTER X
	216002	BDC 500 IR
	216003	BDC 22 RIM FIRE
	216004	BDC 250 MUZZLELOADER IR
	216005	BDC 300 STRAIGHT-WALL IR
4-12x40 SFP	216008	CENTER X
	216009	BDC 500 IR
	216010	BDC 22 RIM FIRE
6-18x44 SFP	216012	CENTER X
	216013	BDC 500 IR

*For full product specs, see page 78*


This is the perfect scope for those who want quality and features all while staying on budget. The Neos has an impressive list of features which are designed and built to endure. It has a one piece aluminum tube, nitrogen purging, as well as Fully Multi-Coated lenses that deliver clarity and brightness. Some of the models even have the latest side parallax focus technology. What about the cost? Let's just say the scope isn't the only thing that looks good, with ruggedness and precision we are proud of!





# COMPARISON CHART

The following table contains detailed specifications of all Athlon Optics riflescopes allowing you to compare them easily and find the right one for you.

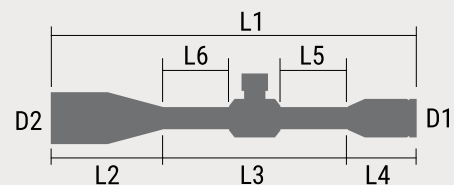

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	EYE RELIEF	FOV @100 YARDS	WEIGHT	CLICK VALUE	ADJ. PER ROTATION	TOTAL ELEVATION ADJ.	TOTAL WINDAGE ADJ.	PARALLAX ADJ.	PURGING MAT.	DIMENSIONS							
													L1	L2	L3	L4	L5	L6	D1	D2
<b>CRONUS BTR GEN2 UHD</b>																				
1-6x24 SFP	Exposed & Locking	30 mm	ATSR2 SFP IR MOA	3.6-4.0"	106.9-17.7 ft	18.8 oz	0.5 MOA	32 MOA	120 MOA	120 MOA	Fixed 100 yds	Argon	10.4" / 6.9"	3.5"	2.0"	3.6"	1.7"	1.2"		
4.5-29x56 FFP	Exposed	34 mm	APLR5 FFP IR MOA APRS1 FFP IR MIL APRS6 FFP IR MIL	3.6-3.8"	24.8-3.83 ft	35.8 oz	0.25 MOA 0.1 MIL	25 MOA 10 MIL	110 MOA 32 MIL	64 MOA 18 MIL	Side Focus 25yds - ∞	Argon	14.4" / 4.1"	6.4"	3.9"	2.6"	2.1"	1.8"	2.6"	
<b>ARES ETR GEN2 UHD</b> * Locking Feature on Windage only																				
1-10x24 FFP	*Exposed & Locking	34 mm	ATMR2 FFP IR MOA ATMR3 FFP IR MIL	3.7"	117.3-11.7 ft	26.9 oz	0.25 MOA 0.1 MIL	25 MOA 10 MIL	100 MOA 29 MIL	80 MOA 25 MIL	Fixed 100 yds	Argon	10.0" / 6.9"	3.1"	2.5"	2.6"	1.8"	1.3"		
4.5-30x56 FFP	*Exposed & Locking	34 mm	APLR12 FFP IR MOA APRS12 FFP IR MIL	3.9"	24.5-3.75 ft	36.8 oz	0.25 MOA 0.1 MIL	25 MOA 10 MIL	110 MOA 32 MIL	110 MOA 32 MIL	Side Focus 25yds - ∞	Argon	15.3" / 5.0"	6.6"	3.7"	2.7"	2.3"	1.83"	2.5"	
15-60x56 SFP	*Exposed & Locking	30 mm	ABLR3 SFP IR MOA	3.7"	7.84-1.94 ft	38.4 oz	.125 MOA	10 MOA	56 MOA	56 MOA	Side Focus 10yds-∞	Argon	15.9" / 7.3"	5.6"	3.0"	1.6"	2.25"	1.8"	2.5"	
<b>ARES BTR GEN3 HD</b>																				
2.5-15x50 FFP	Exposed	30 mm	APLR13 FFP IR MOA APRS13 FFP IR MIL	3.9"	41.8-6.8 ft	27.3 oz	0.25 MOA 0.1 MIL	25 MOA 10 MIL	100 MOA 29 MIL	100 MOA 29 MIL	Side Focus 10yds - ∞	Argon	13.8" / 4.7"	5.5"	3.6"	1.8"	2.2"	1.78"	2.25"	
4.5-27x50 FFP	Exposed	30 mm	APLR13 FFP IR MOA APRS13 FFP IR MIL	3.9"	22.7-3.8 ft	27.3 oz	0.25 MOA 0.1 MIL	25 MOA 10 MIL	80 MOA 24 MIL	80 MOA 24 MIL	Side Focus 25yds - ∞	Argon	13.8" / 4.7"	5.5"	3.6"	1.8"	2.2"	1.78"	2.25"	
<b>MIDAS TAC GEN2 HD</b> * Exposed - Elevation Turret / Capped - Windage Turret																				
4-16x44 FFP	*Exposed/Capped	30 mm	APRS14 FFP MIL	3.7"	27.7-7 ft	23.8 oz	0.1 MIL	10 MIL	30 MIL	15 MIL	Side Focus 10yds - ∞	Argon	14.2" / 4.3"	6.3"	3.6"	2.5"	2.6"	1.71"	2.0"	
6-24x50 FFP	*Exposed/Capped	30 mm	APLR15 FFP MOA APRS14 FFP MIL APRS15 FFP MIL	3.7"	17.8-4.6 ft	26.3 oz	0.25 MOA 0.1 MIL	25 MOA 10 MIL	85 MOA 25 MIL	50 MOA 15 MIL	Side Focus 10yds - ∞	Argon	14.6" / 4.5"	6.3"	3.8"	2.2"	2.6"	1.71"	2.25"	
<b>MIDAS TAC GEN2 UHD</b> * Exposed - Elevation Turret / Capped - Windage Turret																				
5-30x56 FFP	*Exposed/Capped	34 mm	APLR16 FFP IR MOA APRS16 FFP IR MIL	3.7"	23.3-3.9 ft	30 oz	0.25 MOA 0.1 MIL	25 MOA 10 MIL	100 MOA 30 MIL	70 MOA 23 MIL	Side Focus 20yds - ∞	Argon	15.3" / 4.8"	6.8"	3.7"	2.7"	2.36"	1.83"	2.5"	
<b>MIDAS HMR HD</b>																				
2.5-15x50 SFP	Capped	30 mm	AHMR SFP IR MOA BDC 600A	3.9"	41.8-6.8 ft	26.0 oz	0.25 MOA	15 MOA	60 MOA	60 MOA	Side Focus 10yds - ∞	Argon	13.8" / 4.8"	5.5"	3.5"	2.0"	2.4"	1.8"	2.3"	

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	EYE RELIEF	FOV @100 YARDS	WEIGHT	CLICK VALUE	ADJ. PER ROTATION	TOTAL ELEVATION ADJ.	TOTAL WINDAGE ADJ.	PARALLAX ADJ.	PURGING MAT.	DIMENSIONS							
													L1	L2	L3	L4	L5	L6	D1	D2
<b>MIDAS BTR GEN2 HD</b>																				
1-6x24 SFP	Capped	30 mm	ATSR16 SFP IR MOA ATSR4 SFP IR MOA	3.8"	108-17.6 ft	18.1 oz	0.25 MOA	30 MOA	150 MOA	150 MOA	Fixed 100 yds	Argon	10.6" / 7"	3.7"	2.3"	3.5"	1.7"	1.2"		
4.5-27x50 SFP	Exposed	30 mm	AHMR SFP IR MOA APRS4 SFP IR MIL	3.9"	22.7-3.6 ft	26.0 oz	0.25 MOA 0.1 MIL	25 MOA 10 MIL	85 MOA 25 MIL	85 MOA 25 MIL	Side Focus 30 yds - ∞	Argon	13.8" / 4.8"	5.5"	3.5"	2"	2.4"	1.8"	2.3"	
<b>HELOS BTR / *GEN2</b> * Locking Feature on Elevation only																				
*1-10x28 SFP	Capped	34 mm	ATMR4 SFP IR MOA	3.2"	110-10 ft	18.3 oz	0.5 MOA	44 MOA	100 MOA	100 MOA	Fixed 100 yds	Argon	10.3" / 6.9"	3.4"	2.0"	3.1"	1.65"	1.3"		
1-4.5x24 SFP	Exposed	30 mm	ATSR3 SFP IR MOA	3.2"	100-22 ft	22.9 oz	0.25 MOA	23 MOA	80 MOA	80 MOA	Side Focus 10yds - ∞	Argon	9.5" / 6.0"	3.5"	1.9"	2.1"	1.6"	1.2"		
*2-12x42 FFP	Exposed & Locking	30 mm	AHMR2 FFP IR MOA AHMR2 FFP IR MIL	3.6"	55.7-9.6 ft	25.4 oz	0.25 MOA 0.1 MIL	25 MOA 10 MIL	110 MOA 32 MIL	80 MOA 25 MIL	Side Focus 10yds - ∞	Argon	11.8" / 2.9"	5.8"	3.1"	2.7"	1.5"	1.7"	1.95"	
*4-20x50 FFP	Exposed & Locking	30 mm	APLR6 FFP IR MOA APRS6 FFP IR MIL	3.6"	27.9-5.6 ft	27.6 oz	0.25 MOA 0.1 MIL	25 MOA 10 MIL	100 MOA 29 MIL	80 MOA 25 MIL	Side Focus 10yds - ∞	Argon	13.3" / 4.65"	5.55"	3.1"	2.0"	2.0"	1.7"	2.25"	
*6-24x56 FFP	Exposed & Locking	34 mm	APLR6 FFP IR MOA APRS6 FFP IR MIL	3.7"	19.9-5.12 ft	34.5 oz	0.25 MOA 0.1 MIL	25 MOA 10 MIL	100 MOA 29 MIL	80 MOA 25 MIL	Side Focus 10yds - ∞	Argon	14.3" / 4.75"	6.0"	3.55"	2.4"	2.0"	1.85"	2.5"	
<b>HERAS SPR</b> * Locking Feature on Windage only																				
2-12x42 SFP	Exposed & Locking	1"	AAGR1 SFP MOA AAGR1 SFP MIL	3.6"	55.7-9.6 ft	23.5oz	0.25 MOA 0.1 MIL	25 MOA 10 MIL	70 MOA 21 MIL	70 MOA 21 MIL	Side Focus 10yds - ∞	Argon	11.8" / 3.3"	5.3"	3.2"	2.25"	1.5"	1.7"	1.95"	
4-20x50 SFP	Exposed & Locking	30 mm	AAGR2 SFP MOA AAGR2 SFP MIL	3.6"	27.9-5.6 ft	25 oz	0.25 MOA 0.1 MIL	25 MOA 10 MIL	70 MOA 21 MIL	70 MOA 21 MIL	Side Focus 10yds - ∞	Argon	13.3" / 5.15"	4.95"	3.2"	1.75"	1.6"	1.7"	2.25"	
6-24x56 SFP	Exposed & Locking	30 mm	APLR7 SFP IR MOA APRS7 SFP IR MIL APRS8 SFP IR MIL	3.7"	19.9-5.1 ft	32.3 oz	0.25 MOA 0.1 MIL	25 MOA 10 MIL	70 MOA 20 MIL	70 MOA 20 MIL	Side Focus 10yds - ∞	Argon	14.4" / 4.8"	6.0"	3.6"	2.5"	2.1"	1.85"	2.5"	
6-24x56 FFP	Exposed & Locking	30 mm	APLR9 FFP IR MOA APRS9 FFP IR MIL	3.7"	19.9-5.1 ft	32.3 oz	0.25 MOA 0.1 MIL	25 MOA 10 MIL	70 MOA 20 MIL	70 MOA 20 MIL	Side Focus 10yds - ∞	Argon	14.4" / 4.8"	6.0"	3.6"	2.5"	2.1"	1.85"	2.5"	
15-60x56 SFP	Exposed & Locking	30mm	BLR2 SFP MOA	3.7"	7.84-1.94 ft	35.3 oz	0.125 MOA	10 MOA	56 MOA	56 MOA	Side Focus 10yds-∞	Argon	15.9" / 7.3"	5.6"	3.0"	1.6"	2.25"	1.8"	2.5"	
<b>ARGOS BTR GEN3</b>																				
1-8x24 SFP	Capped	30 mm	ATSR5 SFP IR MOA	3.5"	110-14.5 ft	16.1 oz	0.5 MOA	44 MOA	120 MOA	120 MOA	Fixed 100 yds	Argon	9.8" / 6.2"	3.6"	2.3"	2.4"	1.8"	1.2"		
6-24x50 FFP	Exposed	30 mm	APLR11 FFP IR MOA APRS11 FFP IR MIL	3.3"	16.7-4.5 ft	30.3 oz	0.25 MOA 0.1 MIL	25 MOA 10 MIL	60 MOA 18 MIL	60 MOA 18 MIL	Side Focus 10yds - ∞	Argon	14.1" / 4.2"	6.2"	3.7"	2.0"	2.1"	1.8"	2.2"	
8-34x56 FFP	Exposed	30 mm	APLR11 FFP IR MOA APRS11 FFP IR MIL	3.3"	12.5-3 ft	32 oz	0.25 MOA 0.1 MIL	25 MOA 10 MIL	45 MOA 13 MIL	45 MOA 13 MIL	Side Focus 15yds - ∞	Argon	15.5" / 4.9"	6.9"	3.7"	2.0"	2.9"	1.8"	2.5"	
10-40x56 SFP	Exposed	30 mm	ABLR4 SFP MOA	3"	12.6-3.1 ft	31.8 oz	0.125 MOA	12 MOA	45 MOA	45 MOA	Side Focus 10yds - ∞	Argon	16.3" / 6.0"	6.8"	3.5"	1.5"	3.3"	1.8"	2.5"	





POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	EYE RELIEF	FOV @100 YARDS	WEIGHT	CLICK VALUE	ADJ. PER ROTATION	TOTAL ELEVATION ADJ.	TOTAL WINDAGE ADJ.	PARALLAX ADJ.	PURGING MAT.	DIMENSIONS																						
													L1	L2	L3	L4	L5	L6	D1	D2															
<b>ARGOS HMR</b>																																			
2-12x42 SFP	Capped	1"	BDC 600	3.6"	55.7- 9.6 ft	19.8 oz	0.25 MOA	15 MOA	80 MOA	80 MOA	Side Focus 10 yds - ∞	Argon	11.8"	3.3"	5.3"	3.2"	2.1"	1.6"	1.7"	2.0"															
			BDC 600A																																
			AHMC SFP MOA																																
4-20x50 SFP	Capped	1"	BDC 600A	3.6"	27.9- 5.6 ft	21.0 oz	0.25 MOA	15 MOA	80 MOA	80 MOA	Side Focus 10 yds - ∞	Argon	13.2"	5.0"	5.0"	3.2"	1.8"	1.6"	1.7"	2.3"															
			AHMC SFP MOA																																
			MIL-DOT																																
<b>TALOS BTR GEN2</b>																																			
1-4x24 SFP	Capped	30 mm	ATMR6 SFP IR MOA	4.5-3.5"	110- 26 ft	16.8 oz	0.2 MIL	30 MOA	130 MOA	130 MOA	Fixed 100 yds	Nitrogen	9.4"	/	5.8"	3.6"	1.9"	2.6"	1.8"	1.2															
			AHSR14 SFP IR MIL																																
			ATMR7 SFP IR MIL																																
4-14x44 FFP	Exposed	30 mm	APLR10 FFP IR MOA	3.2- 3.15"	27.7- 7.9 ft	25.9 oz	0.25 MOA	15 MOA	65 MOA	65 MOA	Side Focus 10 yds - ∞	Nitrogen	12.9"	3.35"	6"	3.55"	2.1"	1.8"	1.7"	1.8															
			APLR2 FFP IR MIL																																
			APRS10 FFP IR MIL																																
10x42 SFP	Exposed	30 mm	AAGR1 SFP MOA	3.6"	11.5 ft	24.6 oz	0.25 MOA	15 MOA	120 MOA	120 MOA	Side Focus 10yds - ∞	Nitrogen	13.3"	4.1"	6.2"	3"	2.1"	2.5"	1.8"	1.95"															
			APRS2A SFP MIL																																
<b>TALOS</b>																																			
1.5-5x32 SFP	Capped	1"	CB100 SFP IR MOA	2.75"	62 - 20 ft	14.8 oz	0.5 MOA	30 MOA	80 MOA	80 MOA	Fixed 50 yds	Nitrogen	8.8"	1.95"	4.0"	2.85"	1.25"	1.3"	1.4"	1.54"															
3-12x40 SFP	Capped	1"	BDC 250 SHOTGUN IR	5"	26.9- 6.96 ft	18.8 oz	0.25 MOA	15 MOA	70 MOA	70 MOA	Fixed 100 yds	Nitrogen	12.75"	3.8"	5.8"	3.3"	1.5"	2.8"	1.7"	1.9"															
			BDC 600 IR	3.82-	34.1 -																16.2 oz	0.25 MOA	15 MOA	60 MOA	60 MOA	Side Focus 15yds - ∞	Nitrogen	12"	3.6"	4.8"	3.7"	1.9"	1.3"	1.8"	1.9"
			CENTER X	3.35"	8.9 ft																														
			MIL-DOT				0.1 MIL	5 MIL	20 MIL	20 MIL																									
4-16x40 SFP	Capped	1"	BDC 600 IR	3.8-	24.1 -	19.1 oz	0.25 MOA	15 MOA	50 MOA	50 MOA	Side Focus 15yds - ∞	Nitrogen	12.9"	3.5"	5.8"	3.7"	1.9"	2.2"	1.8"	1.9"															
			MIL-DOT	3.35"	6.3 ft																														
6-24x50 SFP	Capped	1"	BDC 600 IR	3.1-	16.8 -	23 oz	0.25 MOA	15 MOA	60 MOA	60 MOA	Side Focus 10yds - ∞	Nitrogen	13.9"	4.0"	6.2"	3.7"	1.9"	2.7"	1.8"	2.2"															
			ATMR1 SFP IR MIL	3.0"	4.5 ft																														
<b>NEOS</b>																																			
3-9x40 SFP	Capped	1"	CENTER X	2.99- 3.07"	37.8- 12.6 ft	17.0 oz	0.25 MOA	15 MOA	80 MOA	80 MOA	Fixed 100 yds	Nitrogen	12.4"	3.3"	5.6"	3.5"	2.3"	2.3"	1.6"	1.9"															
			BDC 500 IR																																
			BDC 22 RIM FIRE																																
			BDC 250 MUZZLE LOADER IR																																
			BDC 300 STRAIGHT-WALL IR																																
4-12x40 SFP	Capped	1"	CENTER X	3.11- 3.15"	27.3- 8.9 ft	18.1 oz	0.25 MOA	15 MOA	80 MOA	80 MOA	Side Focus 10 yds - ∞	Nitrogen	12.4"	3.3"	5.6"	3.5"	2.3"	2.3"	1.6"	1.9"															
			BDC 500 IR																																
			BDC 22 RIM FIRE																																
6-18x44 SFP	Capped	1"	CENTER X	3.39- 3.19"	17.5- 5.9 ft	21.7 oz	0.25 MOA	15 MOA	50 MOA	50 MOA	Side Focus 10 yds - ∞	Nitrogen	13.5"	3.7"	6.3"	3.5"	2.3"	3.0"	1.6"	2.0"															
			BDC 500 IR																																







# SPOTTING SCOPES



SPOTTING SCOPES



athlonoptics.com







# CRONUS G2 UHD



With UHD Glass      Without UHD Glass



20-60x86 mm



20-60x86 mm Dual Focus

## PRODUCT FEATURES




Achromatic Lens System, ESP Dielectric Coating, Magnesium Chassis, XPL Coating, Rotating Ring, Bak-4 Glass Prisms, Advanced Fully Multi-coated Lenses, Argon Purged, Waterproof, Tripod Adaptable

POWER X OBJ. LENS	SKU	EYEPIECE ANGLE	
20-60x86 UHD	311004	45 Degree	<i>For full product specs, see page 95</i>
20-60x86 UHD Dual Focus	311006	45 Degree	

The Cronus is back and better than ever, this time with 2 options. Meet the Cronus G2 featuring a smooth single focus wheel, finely geared to facilitate hitting the sharpest focus, as well as the dual focus with the fine tune focus. The Cronus G2 offers greater color definition, clarity, and light transmission than its brethren. From scouting game on a shadowed tree line to identifying birds in dimly wooded forests, the Cronus G2's enhanced contrast helps separate your subject from its background.







# CRONUS G2 UHD



7-42x60



## PRODUCT FEATURES



UHD Glass, XPL Protective Coating, Aluminum Alloy Chassis, Waterproof, Argon Purged, Rubber Armor, Tripod Adaptable

POWER X OBJ. LENS	SKU	EYEPIECE ANGLE	
7-42x60 UHD	311005	Straight	<i>For full product specs, see page 95</i>

Whether you are a long range shooter or hunter, the Cronus G2 Tactical 7-42x60 spotting scope with our ranging reticle will make your job a breeze. The TSSR FFP MIL reticle is great for both range estimation and tactical cooperation with the shooter. This first focal spotting scope utilizes UHD extra-low dispersion glass for exceptional clarity and detail.


BEST USED FOR







# ARES G2 UHD

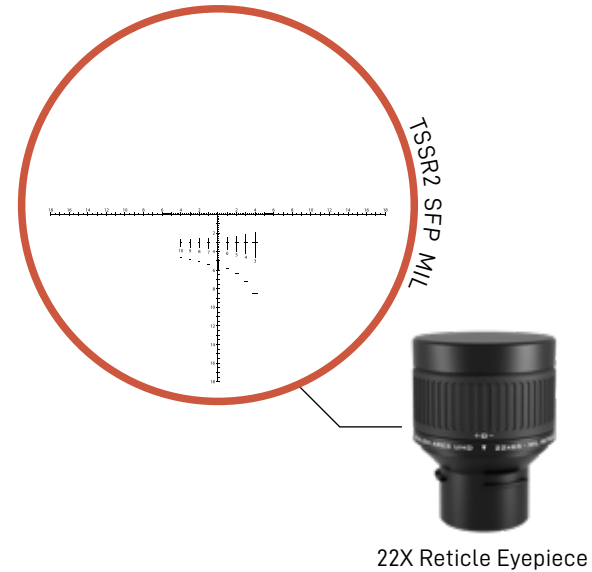

22X Reticle Eyepiece



15-45x65 mm



15-45x65 mm

## PRODUCT FEATURES



Advanced Fully Multi-coated Lenses, Achromatic Lens System, BaK4 Prisms, Magnesium Chassis, Waterproof, Dual Focus, Rotating Ring, Twist Up Eye-Cup, Tripod Adaptable, ESP Dielectric Coating

POWER X OBJ. LENS	SKU	EYEPIECE ANGLE	<i>For full product specs, see page 95</i>
15-45x65 G2 UHD	312004	Straight	Raising the bar for versatility in a spotting scope, the Ares G2 UHD 15-45x65 is an exceptionally useful tool in the outdoor enthusiasts' arsenal. Light enough for long treks through rugged terrain with clarity & magnification for long range viewing. Pair with the optional ranging reticle eyepiece to accurately estimate game or make calls for your buddy at the range.
15-45x65 G2 UHD	312005	45 Degree	
22X Reticle Eyepiece	312006	45 Degree/Straight	







# ARES G2 UHD



SPOTTING SCOPES | ARES G2 UHD

With UHD Glass      Without UHD Glass



20-60x85 mm



20-60x85 mm

## PRODUCT FEATURES



BaK4 Prisms, Magnesium Chassis, Waterproof, Dual Focus, Rotating Ring, Twist Up Eye-Cup, Tripod Adaptable

POWER X OBJ. LENS	SKU	EYEPIECE ANGLE
20-60x85 UHD	312007	Straight
20-60x85 UHD	312008	45 Degree

*For full product specs, see page 95*

When details matter, look no further than the 20-60x85 Ares G2 UHD. Whether you are a birder looking for variances in plumage, or a precision shooter spotting impacts at 1,000 yards, the extra-low dispersion glass provides vivid clarity and resolution in a full-size spotting scope.

BEST USED FOR



athlonoptics.com





# ARGOS G2 HD



### PRODUCT FEATURES



Advanced Fully Multi-coated Lenses, Argon Purged, Waterproof, Rubber Armor, Composite Chassis, Fog Proof, Porro Prism, Rotating Ring, Twist Up Eyecup, Tripod Adaptable


POWER X OBJ. LENS	SKU	EYEPIECE ANGLE
20-60x85 HD	314001	45 Degree
20-60x85 HD	314002	Straight

*For full product specs, see page 95*

We designed the Argos family of spotting scopes with good optical quality and ease of use in mind. The Argos spotting scope features our wide band fully multi-coated lenses and porro prisms with phased coating. They bring great clarity and brightness within the reach of all enthusiasts.





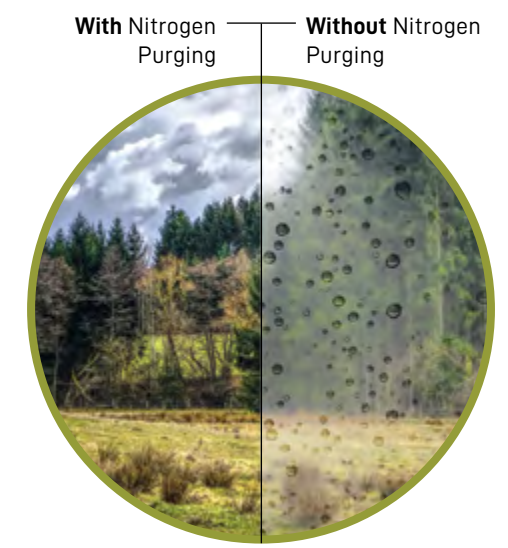

### PRODUCT FEATURES



Silver Coated Prism, Composite Chassis, Fog Proof, Rotating Ring, Twist Up Eye-Cup, Tripod Adaptable, Nitrogen Purged, Waterproof, Fogproof

POWER X OBJ. LENS	SKU	EYEPIECE ANGLE
20-60x80 Tan	315001	45 Degree
20-60x80 Green	31500G	45 Degree

*For full product specs, see page 95*

The Talos spotting scope features our fully multi-coated lenses and K9 prisms with silver coating. The light-weight composite chassis is fog proof, waterproof, and filled with nitrogen gas to prevent internal fogging and promote better thermal stability. The product comes with a table-top tripod and soft case allowing you to carry the spotting scope and tripod in one package.








# COMPARISON CHART



The following table contains detailed specifications of all Athlon Optics Spotting Scopes allowing you to compare them easily and find the right one for you.

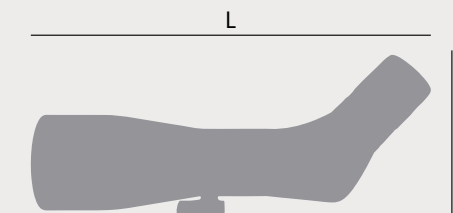

POWER X OBJ. LENS	EYEPIECE ANGLE	COLOR	EYE RELIEF	RETICLES	FOV @1000 YARDS	CLOSE FOCUS	WEIGHT	DIMENSIONS	
								LENGTH	WIDTH
<b>CRONUS G2 UHD</b>									
20-60x86 UHD	45 Degree	Black	0.78"-0.7"	/	111 - 60 ft	26.2 ft	73.5 oz	16.2"	6.5"
20-60x86 UHD Dual Focus	45 Degree	Black	0.78"-0.7"	/	117 - 60 ft	29.5ft	73.5 oz	15.2"	6.7"
7-42x60 UHD	Straight	Black	1.18"	TSSR FFP MIL	284 - 47.6 ft	5.2 - 1.43 mm	46.6 oz	13.9"	2.9"
<b>ARES G2 UHD</b>									
15-45x65 G2 UHD	45 Degree	Green	0.75"-0.63"	/	171 - 81 ft	13.1 ft	45.3 oz	13.5"	3"
15-45x65 G2 UHD	Straight	Green	0.75"-0.63"	/	171 - 81 ft	13.1 ft	45.9 oz	11.9"	3"
22x Reticle Eyepiece	45 Degree/ Straight	Black	0.78"	TSSR2 SFP MIL	143 ft	13.1 ft	8 oz	2.75"	2"
20-60x85 UHD	45 Degree	Green	0.77"-0.70"	/	99 - 47 ft	39.4 ft	70 oz	16.9"	4"
20-60x85 UHD	Straight	Green	0.77"-0.70"	/	99 - 47 ft	39.4 ft	68.9 oz	16.9"	4"
<b>ARGOS G2 HD</b>									
20-60x85 HD	45 Degree	Green	0.77"-0.70"	/	102-48 ft	39.4 ft	70 oz	16.9"	4"
20-60x85 HD	Straight	Green	0.77"-0.70"	/	102-48 ft	39.4 ft	68.9 oz	16.9"	4"
<b>TALOS</b>									
20-60x80	45 Degree	Tan	0.70"-0.60"	/	82.9 - 48 ft	19.7 ft	38.5 oz	16.5"	3.75"
20-60x80	45 Degree	Green	0.70"-0.60"	/	82.9 - 48 ft	19.7 ft	38.5 oz	16.5"	3.75"





# RED DOT SIGHTS



RED DOT SIGHTS



athlonoptics.com







# PISTOL OPEN SIGHTS



Midas EDC PRO - **NEW**



Midas Burst - **NEW**



Midas Beam - **NEW**




Midas Flash



Talos EDC



Talos EDC PRO - **NEW**



## PRODUCT FEATURES




Adjustable Illumination Settings, Aircraft Grade Aluminum, One Piece Chassis Construction, 50K H battery life, Fully Multi-coated Lenses, Motion Sensor

MODEL	SKU	RETICLES	
Midas EDC PRO	403019	3 MOA Dot	New and improved for 2025, our expanding line-up of pistol-ready red dots covers everything from full-size firearms such as the Glock 17 MOS down to the small Springfield Hellcat. Athlon pistol red dots are compact, durable optics designed to enhance accuracy and speed for handguns. These red dot sights provide a crisp, illuminated aiming point for rapid target acquisition, in daylight or low-light conditions. The wide field of view aids in situational awareness, making them ideal for self-defense, competition, or tactical applications.
Midas Burst	403074	3 MOA Dot	
Midas Beam	403073	3 MOA Dot	
Midas Flash	403071	3 MOA Dot	
Talos EDC	405001	3 MOA Dot	
Talos EDC PRO	405002	3 MOA Dot	

*For full product specs, see page 105*







2 MOA DOT

# RED DOTS



Midas Blaze - **NEW**



Midas Strobe - **NEW**

### PRODUCT FEATURES



Adjustable Illumination Settings, Aircraft Grade Aluminum, One Piece Chassis Construction, Picatinny Rail Mount

MODEL	SKU	RETICLES
Midas Blaze	403063	2 MOA Dot
Midas Strobe	403064	2 MOA Dot

*For full product specs, see page 105*

The speed and versatility of a Red Dot goes unmatched in close range engagements. Whether you are running an AR or PCC in competition, hunting, or running a Red Dot on an optics ready pistol, the all new Midas series of Red Dots featuring the Blaze and Strobe has you covered. With 50,000 hours of battery life and motion sensor activation, the New Midas series is always ready.







# PRISM SCOPES



Midas Flare 1x - **NEW**



Midas Flare 3x - **NEW**



Midas Flare 5x - **NEW**

## PRODUCT FEATURES



Adjustable Illumination Settings, Aircraft Aluminum, One Piece Chassis Construction, Picatinny Rail Mount, Capped Turrets

MODEL	SKU	RETICLES
Midas Flare 1x	403077	APX1
Midas Flare 3x	403078	APX3
Midas Flare 5x	403079	APX3

*For full product specs, see page 105*

Quickly acquire and transition between targets at short and medium ranges with the new Midas Line of prism scopes. Fixed magnification in 1x, 3x, or 5x offers greater versatility over traditional red dots. User-selectable red and green illumination matches conditions and shooter preferences, while etched reticles provide a foolproof aiming option when your battery runs out. The prism-based design allows for a more compact scope with a crisp and vivid image.

APX1 - **NEW**



APX3 - **NEW**



**BEST USED FOR**







# MAGNIFIERS



Midas M3 - with flip mount



Midas M5 - with flip mount

## PRODUCT FEATURES



Fog Proof, Shockproof, One Piece Chassis Construction, Aircraft Grade Aluminum, Flip Mount, Picatinny Rail Mount

MODEL	SKU	MAGNIFICATION
Midas M3	403031	3x
Midas M5	403051	5x

*For full product specs, see page 105*

Many times in the field or during competitions you need to transition between no magnification in close-range combat and magnification for precision shooting. The Athlon 3 or 5 power magnifier mounts behind a traditional red-dot sight to provide magnification when needed and has the ability to swing out of the way when not in use.







# COMPARISON CHART



The following table contains detailed specifications of all Athlon Optics Red Dot Sights allowing you to compare them easily and find the right one for you.

MODEL	OBJECTIVE LENS	MAGNIFICATION	RETICLE DOT SIZE	RETICLE COLOR	RETICLE RETICLES	FOV @100 YARDS	EYE RELIEF	IR SETTING	CENTER HEIGHT	CLICK VALUE	MOUNT	BATTERY	WEIGHT	LENGTH
<b>PISTOL OPEN SIGHTS</b>														
Midas EDC PRO	20.5x16mm	1x	3 MOA	Red	3 MOA Dot	/	Unlimited	1-10	0.58"	Linear	RMSc	CR1632	0.74 oz	1.6"
Midas Beam	32x24mm	1x	3 MOA	Red	3 MOA Dot	/	Unlimited	1-10	0.68"	1 MOA	RMR	CR2032	1.95 oz	1.77"
Midas Burst	26x19mm	1x	3 MOA	Red	3 MOA Dot	/	Unlimited	1-10	0.57"	1 MOA	DeltaPoint	CR2032	1.27 oz	1.9"
Midas Flash	22x16mm	1x	3 MOA 6 MOA	Red	3 MOA 6 MOA	/	Unlimited	1-10	0.63"	1 MOA	RMR	CR2032	1.16 oz	1.78"
Talos EDC	22x16mm	1x	3 MOA	Red	3 MOA Dot	/	Unlimited	4 (Auto switch)	0.55"	Linear	RMSc	CR2032	0.36 oz	1.61"
Talos EDC PRO	22x16mm	1x	3 MOA	Red	3 MOA Dot	/	Unlimited	10 (Auto switch)	0.54"	Linear	RMSc	CR2032	0.36 oz	1.6"
<b>RED DOTS</b>														
Midas Blaze	25mm	1x	2 MOA	Red	2 MOA Dot	/	Unlimited	1-10	1.57"	0.5 MOA	PICATINNY RAIL	CR2032	5.5 oz	2.8"
Midas Strobe	25mm	1x	2 MOA	Red	2 MOA Dot	/	Unlimited	1-10	1.57"	0.5 MOA	PICATINNY RAIL	CR2032	6.8 oz	2.8"
<b>PRISM SCOPES</b>														
Midas Flare 1x	22mm	1x	6 MOA	Red & Green	APX1	84.3 ft	3.38"	1-12	1.57"	1 MOA	PICATINNY RAIL	CR2032	9.78 oz	3"
Midas Flare 3x	30mm	3x	2 MOA	Red & Green	APX3	41.9 ft	3.1"	1-12	1.57"	1 MOA	PICATINNY RAIL	CR2032	14.3 oz	4.13"
Midas Flare 5x	30mm	5x	2 MOA	Red & Green	APX3	24.6 ft	2.8"	1-12	1.57"	1 MOA	PICATINNY RAIL	CR2032	15.78 oz	4.7"
<b>MAGNIFIERS</b>														
Midas M3	23.5mm	3x	/	/	/	38.3 ft	2.7"	/	1.39"	/	PICATINNY RAIL	/	10.5 oz	2.9"
Midas M5	27.2mm	5x	/	/	/	23 ft	2.5"	/	1.42"	/	PICATINNY RAIL	/	11.6 oz	3.7"



# MIDAS G2 1 MILE



Midas G2 1 MILE



## RANGING MODES TO CHOOSE FROM

INCLINE ANGLE (T) MODE	Displays the incline angle of your position to the target.
HORIZONTAL DISTANCE (H) MODE	Displays the angle compensated distance to the target. This is the primary mode used by most hunters (Both bow and rifle).
VERTICAL DISTANCE (V) MODE	Displays the vertical distance of your position to the target.

## PRODUCT FEATURES



OLED Illuminating Display, Five Illumination Settings, Dual Units of Measurement (Y/M), Angle Compensation Mode, Line of Sight Mode, Scan Mode, Hunting and Golf Mode, Diopter Adjustment

RANGING REFLECTIVE	SKU	MAGNIFICATION	RANGING DEER	ACCURACY	MAX ANGLE READING	OBJ. LENS DIAMETER	FOV	EYE RELIEF	POWER SUPPLY
5 - 1760 Y	502006	6x	800 Y	±0.5Y	±70°	21 mm	6°	15 mm	CR2-3V

The fastest rangefinder in Athlon's lineup! When seconds matter, you'll only need to spare 1/10th of a second. This Midas G2 1 Mile features a scan more providing nearinstantaneous feedback as you scan from target to target. Capable of displaying true angle-compensated distances, including the ability to measure height and line of sight distances to help you plan your next move.







# TALOS G2 850Y



MAIN DISPLAY PREVIEW



Talos G2 850Y

### RANGING MODES TO CHOOSE FROM

- INCLINE ANGLE (T) MODE** Displays the incline angle of your position to the target.
- HORIZONTAL DISTANCE (H) MODE** Displays the angle compensated distance to the target. This is the primary mode used by most hunters (Both bow and rifle).
- VERTICAL DISTANCE (V) MODE** Displays the vertical distance of your position to the target.

### PRODUCT FEATURES

- PROOF
  - PURGED
  - RA
- OLED Illuminating Display, Five Illumination Settings, Dual Units of Measurement (Y/M), Angle Compensation Mode, Line of Sight Mode, Scan Mode, Hunting and Golf Mode, Diopter Adjustment

RANGING REFLECTIVE	SKU	MAGNIFICATION	RANGING DEER	ACCURACY	MAX ANGLE READING	OBJ. LENS DIAMETER	FOV	EYE RELIEF	POWER SUPPLY
6 - 850 Y	505003	6x	300 Y	±1Y	±70°	21 mm	7°	14 mm	CR2-3V

We've redesigned the Talos rangefinder into a more compact frame. The Athlon Talos laser rangefinder still brings affordability to the average hunter. Accurately range deer-sized game from 6 to 300 yards and reflective targets out to 850 yards. Nitrogen purging, a water-tight body, and protective rubber armor will keep your range finder working for you even when the weather doesn't.





# TRIPODS



## CF TRIPOD HEAD PARTS

- 1 Quick Release Arca Plate
- 2 Quick Release Knob
- 3 Ball Lock Knob
- 4 Friction Control Knob
- 5 Fluid Pan Control Knob
- 6 Weight/Accessory Hook

## AL TRIPOD HEAD PARTS

- 1 Quick Release Arca Plate
- 2 Quick Release Knob
- 3 Ball Lock Knob
- 4 Friction Control Knob
- 5 Fluid Pan Control Knob

MODEL	SKU	HEAD STYLE	HEAD MOUNT	LEG MATERIAL	MAX LEG DIA.	MAX EXT. HEIGHT	LOWEST EXT. HEIGHT.	FOLDED HEIGHT	WEIGHT	MAX LOAD
CF40	706005	Ball	Arca-Swiss	Carbon Fiber	40 mm	71"	10"	29"	8.4 lb	88 lb
CF36	706006	Ball	Arca-Swiss	Carbon Fiber	36 mm	71"	10"	29"	7.7 lb	66 lb
CF32	706007	Ball	Arca-Swiss	Carbon Fiber	32 mm	65"	9"	26"	5.7 lb	55 lb
CF29	706008	Ball	Arca-Swiss	Carbon Fiber	29 mm	65"	9"	26"	5.5 lb	33 lb
AL28	706009	Ball	Arca-Swiss	Aluminum	28 mm	65"	17"	27"	4.7 lb	26 lb

Rock. Solid. Stability. Athlon's carbon fiber tripods come ready to support your rifle with the included bowl mount or ball head. The ball head features Friction Control, Fluid Pan Control, Ball Lock, and Arca compatibility for direct-to-rifle attachment. Three leg diameter options offer increasing stability and max support weight for spotting optics or as a weapon-mount platform. For those that prefer a traditional center-shaft style tripod, the aluminum 28mm provides excellent stability and versatility, ideal for a dedicated spotting optic tripod.



BEST USED FOR







# ACCESSORIES

## PRECISION RINGS



DIAMETER	1"	30 mm	30 mm	30 mm
SIZE	MED	LOW	MED	MSR
HEIGHT	.9"	.89"	1.05"	1.443"
DIAMETER	34 mm	34 mm	34 mm	
SIZE	LOW	MED	MSR	
HEIGHT	.96"	1.16"	1.519"	

## ARMOR RINGS



DIAMETER	1"	30 mm	30 mm	30 mm
SIZE	MED	LOW	MED	MSR
HEIGHT	.9"	.868"	.993"	1.443"
DIAMETER	34 mm	34 mm	34 mm	
SIZE	LOW	MED	MSR	
HEIGHT	.944"	1.069"	1.519"	

## BINOCULAR HARNESS

Front and center, high and tight! Featuring a 4-point harness for all-day comfort, the new Athlon binocular harness eliminates sag and bounce. Go unnoticed while reaching for your binoculars, thanks to the magnetic closure and clasp-less design. Side mesh pockets and a securely zippered back mesh pocket add additional storage for all your accessories.



**Features:** Fold-Down Lid Retention, Magnetic Closure for Quiet Access, 4 Point Harness for All Day Comfort, Zippered Back Mesh Pocket, Side Mesh Pockets



## AR TACTICAL CANTILEVERS



DIAMETER	30mm	30mm	34mm
ANGLE (MOA)	0	20	20

## ARMOR CANTILEVERS



DIAMETER	1"	30mm	30mm	34mm	34mm
ANGLE (MOA)	0	0	20	0	20

## SCOPE SUNSHADES

Cronus BTR GEN2, Ares ETR GEN2, Ares BTR GEN3, Midas TAC GEN2, Midas HMR, Midas BTR GEN2, Helos BTR GEN2, Argos BTR GEN3, Talos BTR riflescopes.




Black matte surface finish, 4.5 inches long, sizes in 56, 50, 44mm.

## SADDLE MOUNT

Athlon's Saddle Mount adds a range of options to any tripod system. This tactical gun saddle vise features an extremely smooth adjustment dial, 7-degree grip enhancing inward facing side and bottom pads for recoil reduction, a clamping range of 1.1 - 2.6 inches, and still manages to maintain a weight of 3.5 oz.



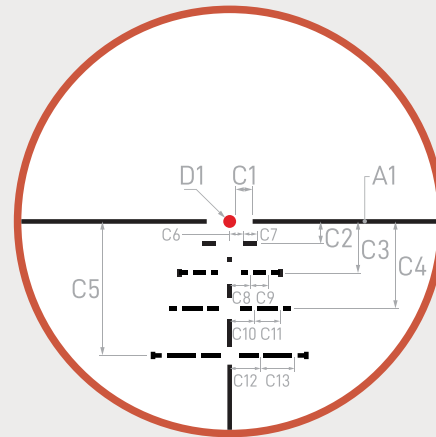


**CRONUS BTR GEN2 UHD**  
**ATSR2 SFP IR MOA**


ATSR2 SFP IR MOA Designed around the .223/5.56mm using a 69 grain Sierra Match King and a 200 yard zero. The open center design allows shooters to engage 12-18" targets out to 600 yards by quickly bracketing the target. Subtension holds for 300, 400, 500, and 600 yards are calibrated to compensate for 0, 5, and 10 MPH winds. The 3-post cross hair design quickly draws the shooters attention to the illuminated center dot. Perfect for 3-gun competitions or the hunter looking for short to midrange engagement when seconds matter.

\*for 1-6x24: subtension valid @ 6x

**SUBTENSIONS IN MOA**


A1	C1	C2	C3	C4	C5	C6	C7
0.5	2.5	2.4	5.6	9.5	14.6	1.5	1.5
C8	C9	C10	C11	C12	C13	D1	
2.25	2	2.7	2.8	3.4	3.7	1.4	

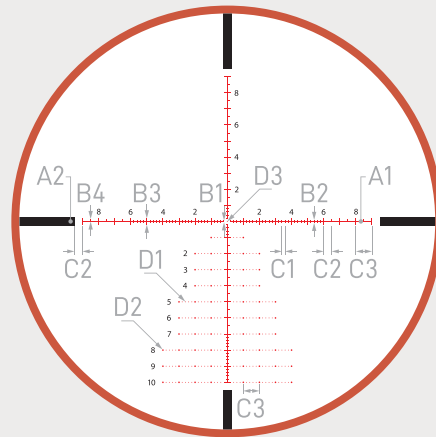**CRONUS BTR GEN2 UHD**  
**APRS1 FFP IR MIL**


APRS1 FFP IR MIL reticle is designed for Precision Rifle Series competition and any other long-range applications that require accurate ranging capability. It can help you quickly determine distance, holdover positions, windage correction and leads for a moving target. The unique design of fine .2 mil hash mark increments from center to 6 mils to both left and right helps the shooter set a quick windage holdover position after he or she dials in elevation on their targets. The floating 0.04 center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

**SUBTENSIONS IN MIL**


A1	A2	B1	B2	B3	B4
0.025	0.5	0.1	0.18	0.4	0.15
C1	C2	C3	D1	D2	D3
0.2	0.5	1	0.05	0.1	0.04

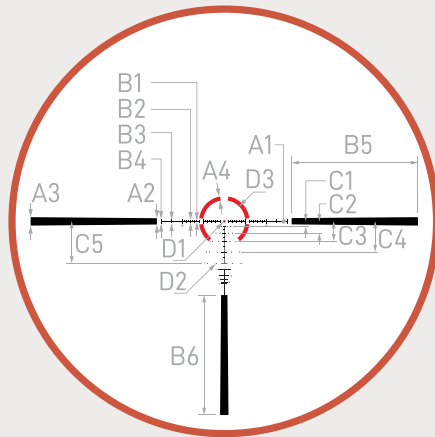**ARES ETR GEN2 UHD**  
**ATMR2 FFP IR MOA**


ATMR2 FFP IR MOA reticle is designed for fast close-range situations and mid-range shooting, using 68 or 69 gr .223/5.56 Nato cartridges. On 1x the 20 moa illuminated quartered ring and 1.2 moa center dot provide the same fast-acquisition capabilities of a standard red dot. Increasing magnification, the holdover and windage subtensions become visible. The .5 moa wind holds for 5 and 10 mph winds. As a First Focal Plane scope the reticle remains valid throughout the magnification range providing holdovers out to 700 yards. A built-in ranging tree on the lower vertical post provides quick range estimation on a 36" tall silhouette target.

**SUBTENSIONS IN MOA**


A1	A2	A3	A4	B1	B2	B3	B4	B5
0.25	3	4	2	0.4	1.2	1.5	2	60
B6	C1	C2	C3	C4	C5	D1	D2	D3
57	2.4	5.6	9.5	14.6	20	1.2	0.5	20

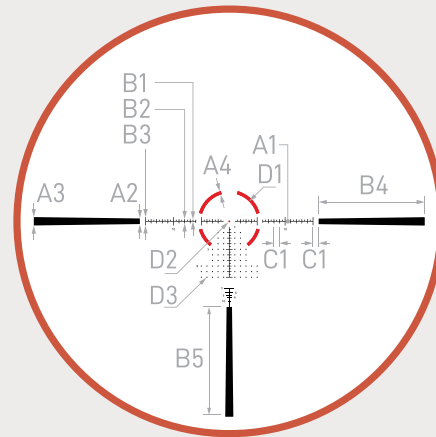**ARES ETR GEN2 UHD**  
**ATMR3 FFP IR MIL**


The most versatile scope in our lineup, paired with an equally versatile reticle. Fast CQB or long-range engagements are easily made thanks to this uniquely designed First Focal Plane reticle. The illuminated 10 mil quartered ring and precise .35 mil center aid in fast acquisition on low magnification. As the magnification increases the versatile holdover and windage subtensions become visible, turning this into a mid to long range capable optic. If mil ranging isn't for you, default to the simple silhouette target ranging tree at just above the vertical post.

**SUBTENSIONS IN MIL**


A1	A2	A3	A4	B1	B2	B3
0.11	1	1.5	0.6	0.3	0.8	1.5
B4	B5	C1	D1	D2	D3	
19	19.67	1	10	0.35	0.15	

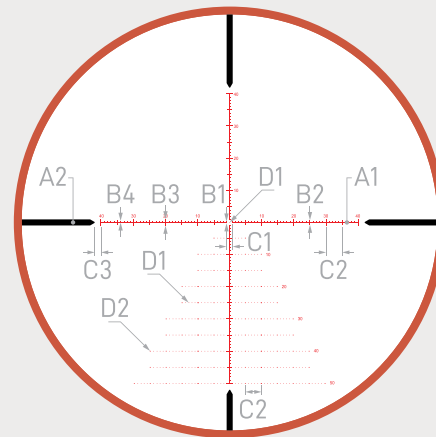**CRONUS BTR GEN2 UHD**  
**APLR5 FFP IR MOA**


APLR5 FFP IR MOA reticle is designed for Precision Rifle Series competition and any other long-range applications that require accurate ranging capability. It can help you quickly determine distance, holdover positions, windage correction and leads for a moving target. The unique design of the fine 1 moa hash mark increments from center to 40 moa to both left and right helps the shooter determine a quick windage holdover position after he or she dialed in elevation on their targets. The floating 0.2 moa center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

**SUBTENSIONS IN MOA**


A1	A2	B1	B2	B3	B4
0.13	2	0.6	1.5	2	0.5
C1	C2	C3	D1	D2	
2	5	2	0.2	0.3	

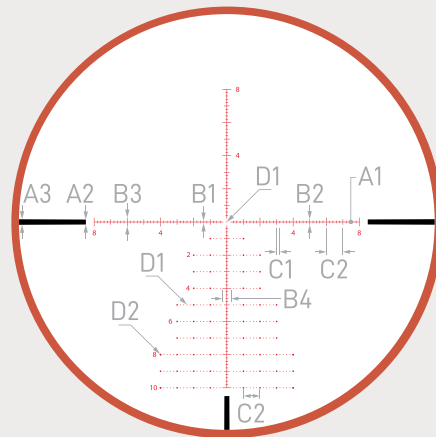**CRONUS BTR GEN2 UHD**  
**APRS6 FFP IR MIL**


APRS6 FFP IR MIL reticle is designed for Precision Rifle Series competition and any other long-range applications that require accurate ranging capability. It can help you quickly determine distance, hold-over positions, windage correction and leads for a moving target. The unique design of fine 0.2 mil hash mark increments from center to four directions helps the shooter set a quick elevation or windage holdover position. The floating 0.04 mil center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

**SUBTENSIONS IN MIL**


A1	A2	A3	B1	B2	B3
0.025	0.3	0.4	0.18	0.35	0.55
B4	C1	C2	D1	D2	D3
0.4	0.2	1	0.04	0.05	0.1

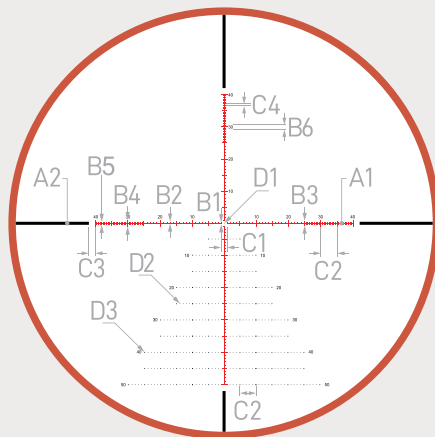**ARES ETR GEN2 UHD**  
**APLR12 FFP IR MOA - NEW**


APLR12 FFP IR MOA reticle has a .13 moa floating center dot with 1 moa hash mark increments and drop lines in 5 moa increments on vertical direction down to 50 moa, both of which help you quickly lock in your target and set holdover positions. The gap between the floating center cross and the first hash mark is 1 moa at four directions. The drop lines have smaller dots with 1 moa in between and bigger dots at each 5 moa interval, starting 10 moa length horizontally and end up 40 moa in length at the 50 moa drop line. The design of the floating center dot with 2 moa span in the middle provides little to no target obstruction for engaging small targets at long distances.

**SUBTENSIONS IN MOA**

A1	A2	B1	B2	B3	B4	B5	B6
0.13	1	0.6	0.5	1.5	2	0.8	1
C1	C2	C3	C4	D1	D2	D3	
2	5	2	0.5	0.18	0.2	0.3	

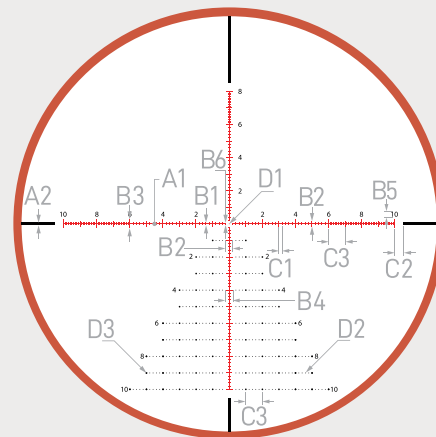**ARES ETR GEN2 UHD**  
**APRS12 FFP IR MIL - NEW**


APRS12 FFP IR MIL reticle is designed for precision rifle series competition and any other long range shooting applications with accurate ranging capability. It can help you quickly determine distance, holdover positions, windage correction and leads for a moving target. The unique design of fine 0.2 mil hash mark increments from center to four directions helps the shooter set a quick elevation or windage holdover position. The floating 0.05 mil center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

**SUBTENSIONS IN MIL**


A1	A2	B1	B2	B3	B4	B5
0.03	0.2	0.18	0.35	0.55	0.4	0.3
B6	C1	C2	C3	D1	D2	D3
0.12	0.2	0.4	1	0.05	0.06	0.1





### ARES ETR GEN2 UHD

ABLR3 SFP IR MOA - **NEW**

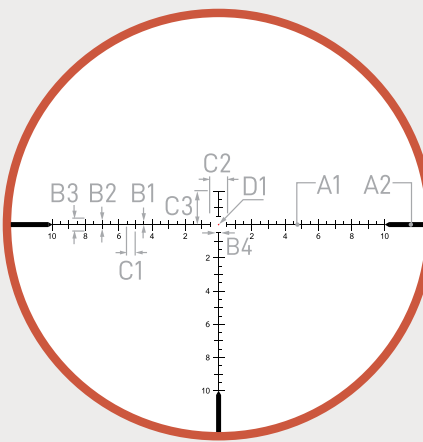


ABLR3 SFP IR MOA reticle is designed to maximize your performance for both Bench Rest and F-Class shooting applications. Fine line thickness of the reticle (0.018 moa) allows for pinpoint precision at extreme ranges, especially on smaller targets. An illuminated floating center dot (0.09 moa thick) provides a precise aiming point. This reticle combined with the Ares ETR GEN2 UHD riflescope provides the perfect solution

**SUBTENSIONS IN MOA**

A1	A2	B1	B2	B3
0.018	0.3	0.2	0.5	0.7
B4	C1	C2	C3	D1
0.3	0.5	1	2	0.09

### ARES BTR GEN3 HD

APLR13 FFP IR MOA - **NEW**

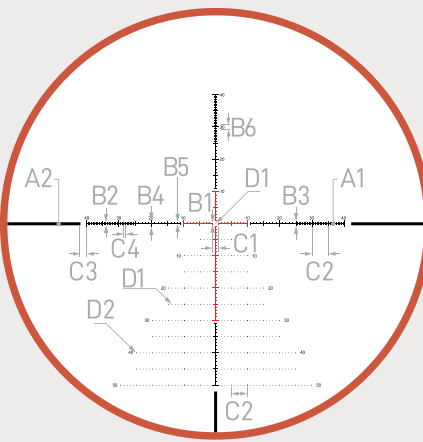

APLR13 FFP IR MOA reticle has a 0.2 moa floating dot with 1 moa hashmark increments. 5 MOA increments are represented by the wider subtension and 10 MOA increments are represented by the wider subtension and 10 MOA increments labeled at those increments. This creates a clean, yet concise reticle ideal for hunting and precision shooting applications. The main cross is illuminated from -10 MOA to 30 MOA vertically and the horizontal center of that cross illuminated for 20 MOA total, providing a clear aiming reference in low light conditions without the clutter. Featuring the popular open center 2 MOA gap, paired with the floating dot ensures even on the range your reticle will not obscure your bullseye.


**SUBTENSIONS IN MOA**

A1	A2	B1	B2	B3	B4	B5
0.13*	1*	0.6	0.8	1.5	2	0.5
B6	C1	C2	C3	D1	D2	D3
1	2	5	2	0.5	0.2	0.3

\*4.5-27x50: use table  
2.5-15x50: A1=0.24, A2=1.5

### MIDAS TAC GEN2 HD

APLR15 FFP MOA - **NEW**

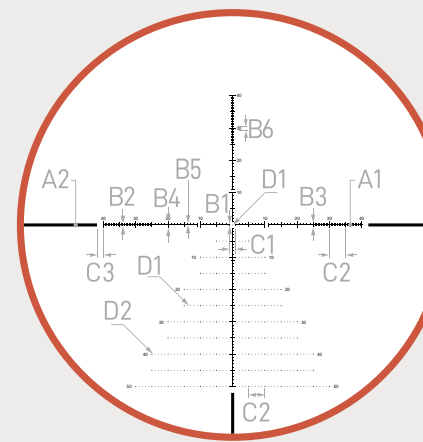


APLR15 FFP MOA reticle has a 0.2 moa floating center dot with 1 moa hash mark increments and drop lines in 5 moa increments on vertical direction down to 50 moa, both of which help you quickly lock in your target and set holdover positions. The gap between the floating center dot and the first hash mark is 1 moa at four directions. The drop lines have smaller dots with 1 moa in between and bigger dots at each 5 moa interval, starting 10 moa length horizontally and end up 60 moa in length at the 50 moa drop line. The floating 0.3 moa center dot with 2 moa span gap in the middle provides little to no target obstruction for engaging small targets at long distances.

**SUBTENSIONS IN MOA**

A1	A2	B1	B2	B3	B4	B5
0.13	1	0.6	0.8	1.5	2	0.5
B6	C1	C2	C3	C4	D1	
1	2	5	2	0.2	0.3	

### MIDAS TAC GEN2 HD

APRS15 FFP MIL - **NEW**

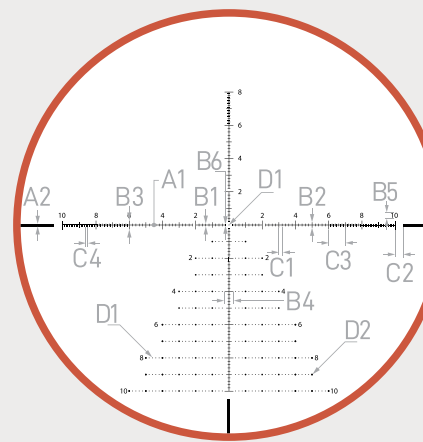


APRS15 FFP IR MIL reticle is designed for a wide range of applications from hunting to precision rifle work where accuracy and precision is paramount. The subtension spacing of .2 mils provides precision hold overs along the vertical axis and for the horizontal you have .2 mil out to 6 mils where it transitions to .1 mil for slight variances in windage and elevation correction. The open-center and .05 mil floating dot eliminates the concern for target obstruction, resulting in smaller groups at the range.

**SUBTENSIONS IN MIL**

A1	A2	B1	B2	B3	B4	B5
0.03	0.2	0.18	0.35	0.55	0.4	0.3
B6	C1	C2	C3	C4	D1	D2
0.1	0.2	0.4	1	0.1	0.05	0.1

### ARES BTR GEN3 HD

APRS13 FFP IR MIL - **NEW**

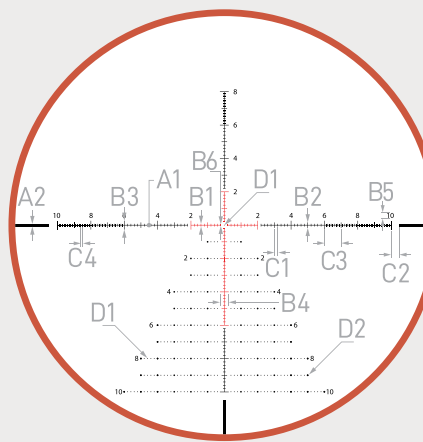

APRS13 FFP IR MIL reticle is designed for a wide range of applications from hunting to precision rifle work where accuracy and precision is paramount. The main crosshair is illuminated from -2 to +6 mils vertically and 2 mils left and right of the centerpoint. This illumination method quickly draws the shooters eye to the center in low-light situations. The subtension spacing of .2 mils provides precision holds for slight variances in windage and elevation correction. The open-center and .05 mil floating dot eliminates the concern for target obstruction, resulting in smaller groups at the range.


**SUBTENSIONS IN MIL**

A1	A2	B1	B2	B3	B4	B5
0.03*	0.2*	0.18	0.35	0.55	0.4	0.3
B6	C1	C2	C3	C4	D1	D2
0.1	0.2	0.4	1	0.1	0.05	0.1

\*4.5-27x50: use table  
2.5-15x50: A1=0.06, A2=0.3

### MIDAS TAC GEN2 HD

APRS14 FFP MIL - **NEW**

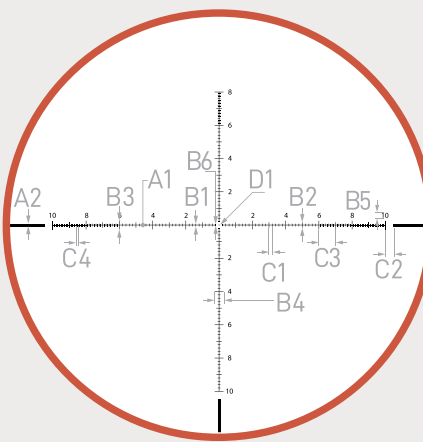

APRS14 FFP MIL reticle is designed for Precision Rifle Series competition and any other long-range applications that require accurate ranging capability. It can help you quickly determine distance, holdover positions and windage corrections. The unique design of fine .2 mil hash mark increments from center to 10 mils on the vertical and 6 mils on the horizontal then transition to .1 mil hash marks to both left and right helps the shooter set a quick windage holdover position after dialing in elevation on the target. The floating 0.05/0.06 center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.


**SUBTENSIONS IN MIL**

A1	A2	B1	B2	B3	B4	B5
0.06*	0.3*	0.18	0.35	0.55	0.4	0.3
B6	C1	C2	C3	C4	D1	
0.1	0.2	0.4	1	0.1	0.06*	

\*4-16x44: use table  
6-24x50: A1=0.04, A2=0.2, D1=0.05

### MIDAS TAC GEN2 HD

APLR16 FFP IR MOA - **NEW**

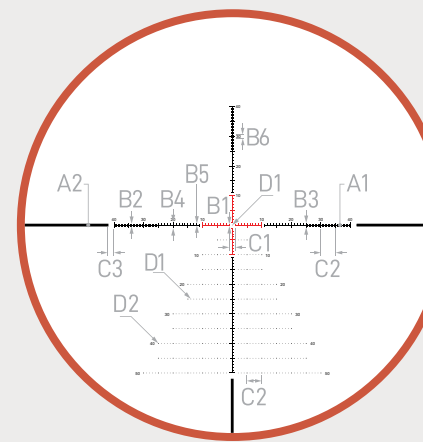


APLR16 FFP IR MOA reticle has a 0.2 moa floating center dot with 1 moa hash mark increments and drop lines in 5 moa increments on vertical direction down to 50 moa, both of which help you quickly lock in your target and set holdover positions. The gap between the floating center dot and the first hash mark is 1 moa at four directions. The drop lines have smaller dots with 1 moa in between and bigger dots at each 5 moa interval, starting 10 moa length horizontally and end up 60 moa in length at the 50 moa drop line. The floating 0.3 moa center dot with 2 moa span gap in the middle provides little to no target obstruction for engaging small targets at long distances.

**SUBTENSIONS IN MOA**

A1	A2	B1	B2	B3	B4	B5
0.12	1	0.6	0.8	1.5	2	0.5
B6	C1	C2	C3	C4	D1	
1	2	5	2	0.2	0.3	

### MIDAS TAC GEN2 HD

APRS16 FFP IR MIL - **NEW**

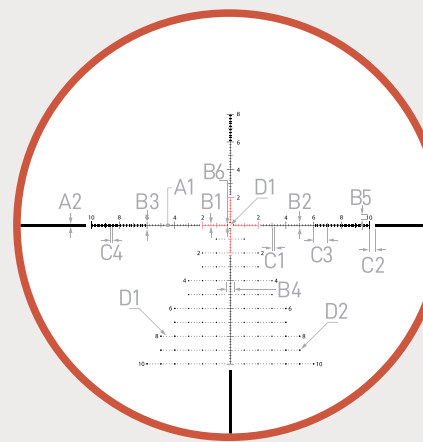

APRS16 FFP IR MIL reticle is designed for precision rifle series competition and any other long range shooting applications with accurate ranging capability. It can help you quickly determine distance, hold-over positions, windage correction and leads for a moving target. The unique design of fine 0.2 mil hash mark increments from center to four directions helps the shooter set a quick elevation or windage holdover position. The floating 0.05 mil center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

**SUBTENSIONS IN MIL**


A1	A2	B1	B2	B3	B4	B5
0.03	0.2	0.18	0.35	0.55	0.4	0.3
B6	C1	C2	C3	C4	D1	D2
0.1	0.2	0.4	1	0.1	0.05	0.1





### MIDAS HMR HD

#### AHMR SFP IR MOA

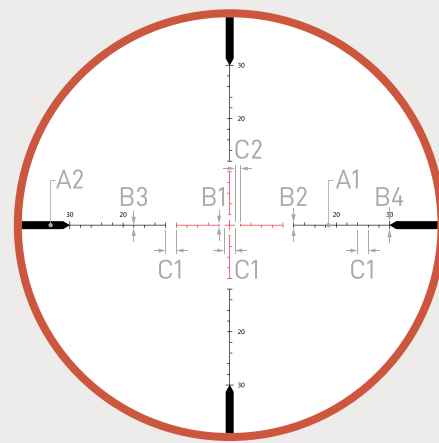

AHMR SFP IR MOA reticle has an illuminated 20 moa center with a 2 moa center cross and 2 moa incremental hash marks which provide a unique two layer visual reference for a shooter to locate and get dead on the target within a blink of an eye. The illuminated reticle provides excellent low light visibility. The unique design of the markings with 2 & 4 moa and 6 & 8 moa locating at the opposite side of the lines gives you a clear reading of the markings with no confusions.


\*for 2.5-15x50:  
subtension valid @ 15x

#### SUBTENSIONS IN MOA

A1	A2	B1	B2
0.12	1.5	0.5	1
B3	B4	C1	C2
0.5	1.5	2	1

### MIDAS HMR HD

#### BDC 600A IR

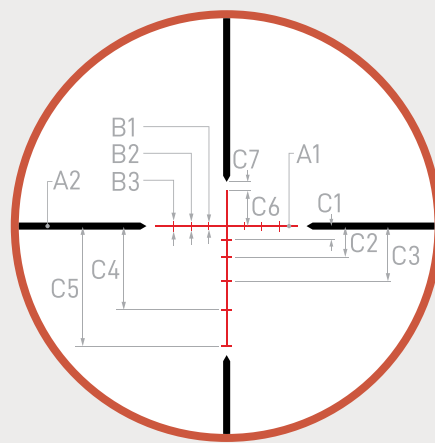

BDC 600A IR reticle can be used effectively with a variety of firearms giving your accurate ranges and reference marks which can be used to compensate for bullet drift in windy conditions or range distances. The user can sight in at 100 yards on any magnification setting, but for the ballistic reticle feature to function properly, the scope's magnification must be set to the correct power.


\*for 2.5-15x50:  
subtension valid @ 15x

#### SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	C1
0.15	0.6	0.8	1	1.2	1.5
C2	C3	C4	C5	C6	C7
3.5	6.25	9.5	13.6	4	1

### MIDAS BTR GEN2 HD

#### AHMR SFP IR MOA

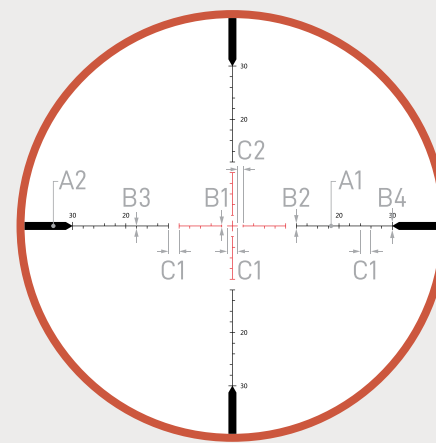

AHMR SFP IR MOA reticle has an illuminated 20 moa center with a 2 moa center cross and 2 moa incremental hash marks which provide a unique two layer visual reference for a shooter to locate and get dead on the target within a blink of an eye. The illuminated reticle provides excellent low light visibility. The unique design of the markings with 2 & 4 moa and 6 & 8 moa locating at the opposite side of the lines gives you a clear reading of the markings with no confusions.


\*for 4.5-27x50:  
subtension valid @ 27x

#### SUBTENSIONS IN MOA

A1	A2	B1	B2
0.12	1.5	0.5	1
B3	B4	C1	C2
0.5	1.5	2	1

### MIDAS BTR GEN2 HD

#### APRS4 SFP IR MIL

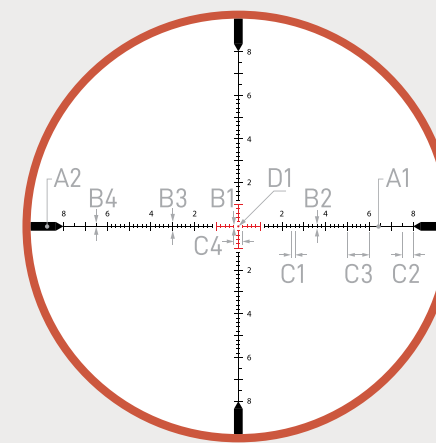

APRS4 SFP IR MIL reticle has an illuminated 2 mil center cross with an open center. A fine .1 diameter floating dot reduces target obstruction, while the illuminated cross provides excellent low light visibility. .2 mil incremental hashmarks out to 6 Mils for windage and elevation makes estimations easy.


\*for 4.5-27x50:  
subtension valid @ 27x

#### SUBTENSIONS IN MIL

A1	A2	B1	B2	B3	B4
0.04	0.4	0.1	0.8	0.4	0.15
C1	C2	C3	C4	D1	
0.2	0.5	1	0.4	0.1	

### MIDAS BTR GEN2 HD

#### ATSR4 SFP IR MOA

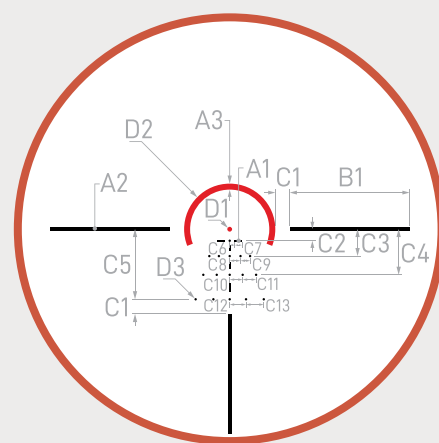

ATSR4 SFP IR MOA reticle is designed for quick target acquisition, speed, and precision shooting in short to mid-range environments. Ideal for CQC and 3-gun competition, this reticle is calibrated for a 68 grain Hornady and 69 grain Sierra cartridges, and suitable for any 5.56 Nato/.223 caliber rifle using a 200 yard zero. The 25 moa horizontal and lower 1/3rd crosshairs quickly draw the shooter's eye to the illuminated 19 moa horse-shoe and 1.4 moa center dot. With a 200 yard zero, the precise .5 moa elevation holds compensate for 300, 400, 500, and 600 yards and 0, 5 and 10 MPH winds.


\*for 1-6x24:  
subtension valid @ 6x

#### SUBTENSIONS IN MOA

A1	A2	A3	B1	C1	C2	C3	C4	C5	C6
0.3	0.8	1.25	25	3	2.4	5.6	9.5	14.6	1.07
C7	C8	C9	C10	C11	C12	C13	D1	D2	D3
1.5	2.25	2	2.7	2.8	3.4	3.7	1.4	19	0.5

### MIDAS BTR GEN2 HD

#### ATSR16 SFP IR MOA

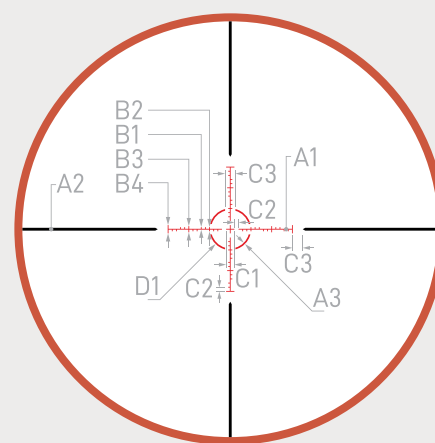

ATSR16 SFP IR MOA reticle has a large illuminated center and 2 moa incremental hash marks, which help you quickly lock in your target and set holdover positions. The illuminated center with a 20 moa diameter circle in the middle has a 2 moa center cross and 2 moa incremental hash marks extended to 30 moa at each direction on both vertical and horizontal lines. The cross lines, middle circle, and center cross provide a unique three layer visual reference for a shooter to locate the target and set dead on the center cross within a blink of an eye.


\*for 1-6x24:  
subtension valid @ 6x

#### SUBTENSIONS IN MOA

A1	A2	A3	B1	B2	B3
0.4	1.38	0.75	1	2	3
B4	C1	C2	C3	D1	
4	4	2	5	20	

### HELOS BTR

#### ATSR3 SFP IR MOA

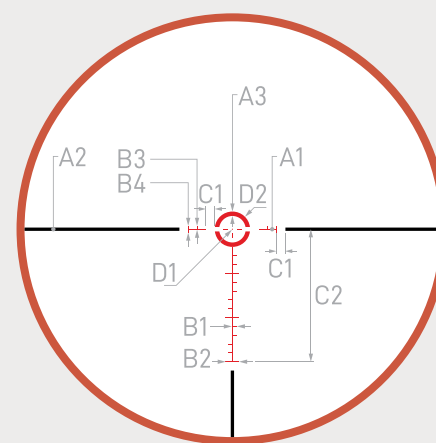

ATSR3 SFP IR MOA is designed for High Power Service Rifle matches. A 12 moa center circle outlines a 8 moa floating cross with a precise .5 moa center dot. The outer circle helps the shooter find the target quickly, while the .5 moa floating dot allows for precise shot placement. Illuminated subtensions provide contrast between the reticle and target.


\*for 1-4.5x24:  
subtension valid @ 4.5x

#### SUBTENSIONS IN MOA

A1	A2	A3	B1	B2	B3
0.45	1.5	4	2	6	1.5
B4	C1	C2	D1	D2	
3	4	60	0.5	16	

### HELOS BTR GEN2 / ARGOS BTR GEN3

#### ATMR4 SFP IR MOA

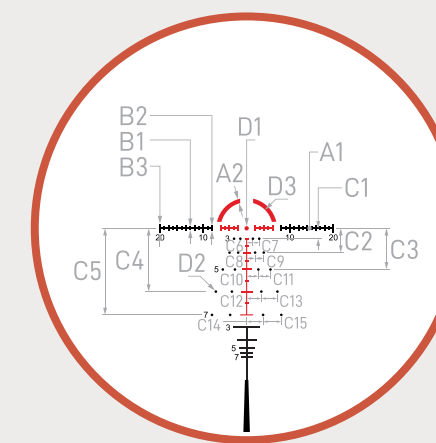

ATMR4 SFP IR MOA reticle is designed for the fast CQB or long-range engagements. The 12 moa illuminated quartered half circle aids in rapid acquisition for close range targets. The drop compensation is designed for 68 or 69 gr .223/5.56 Nato cartridges out to 700 yards. A target ranging reticle located just above the vertical post is designed to estimate target range on a 36" tall silhouette target.

\*1-10x28: use table  
1-8x24: A1=1

#### SUBTENSIONS IN MOA


A1	A2	B1	B2	B3	C1	C2	C3	C4	C5	C6	C7
0.25*	1	0.8	1.2	2	2.4	5.6	9.5	14.6	20	1.4	1.5
C8	C9	C10	C11	C12	C13	C14	C15	D1	D2	D3	
1.95	2.1	2.7	2.8	3.4	3.7	3.8	4.2	1	0.6	12	





### HELOS BTR GEN2

#### AHMR2 FFP IR MOA

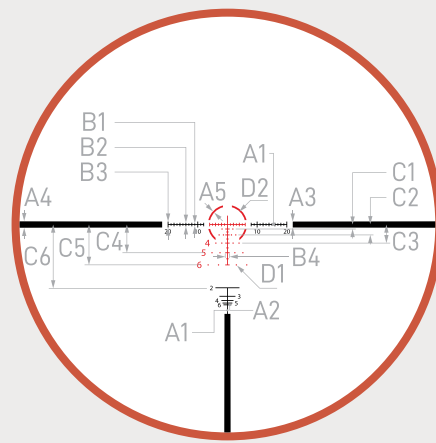


AHMR2 FFP IR MOA reticle is specifically designed for hunting and mid range application and the popular hunting caliber rifles with hold over points for both bullet drop compensation and wind holdover. The reticle is designed for you to zero your rifle a 100 yds center and use the bullet drop holdover up to 700 yds. The dots on horizontal lines below the center are specially designed for holding over for 5 mph and 10 mph wind. The ranging reticle down below is specially designed for ranging a deer body mass (from belly to the top of shoulder of a whitetail buck) from 200 yds to 600 yds. The illuminated center portion of the reticle provides great visibility during dusk and dawn low light conditions.

#### SUBTENSIONS IN MOA

A1	A2	A3	A4	A5	B1	B2	B3	B4
0.29	0.18	2	3	0.6	0.8	1.2	2	1.5
C1	C2	C3	C4	C5	C6	D1	D2	
1.5	3.5	6.25	9.5	13.6	21.5	0.45	12	

### HELOS BTR GEN2

#### AHMR2 FFP IR MIL

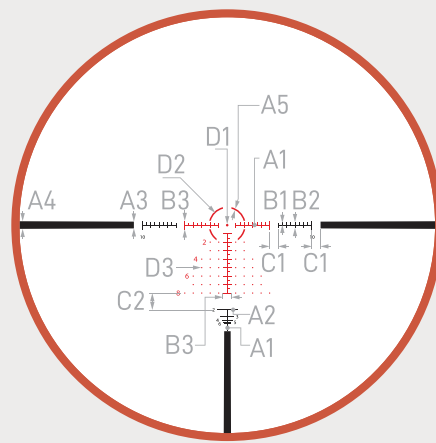


AHMR2 FFP IR MIL reticle is specifically designed for both hunting and shooting competitions. The 0.3 mil (1 moa) red dot is perfect for zeroing your rifle at 100 yards and the dots below the center red dot are for windage holdover with 0.5 mil increments. The center dot with 4 mil diameter circle provides quick aiming point at lower power and enough details for longer distance targets at higher power. The illumination of the reticle provides great visibility during low light conditions. The ranging reticle down below is specially designed for ranging a deer body mass (from belly to the top of shoulder of a whitetail buck) from 200 yds to 600 yds.

#### SUBTENSIONS IN MIL

A1	A2	A3	A4	A5	B1	B2
0.084	0.05	0.8	1.3	0.18	0.25	0.7
B3	C1	C2	C3	D1	D2	D3
1	1	2	2.5	0.3	4	0.15

### HELOS BTR GEN2

#### APLR6 FFP IR MOA

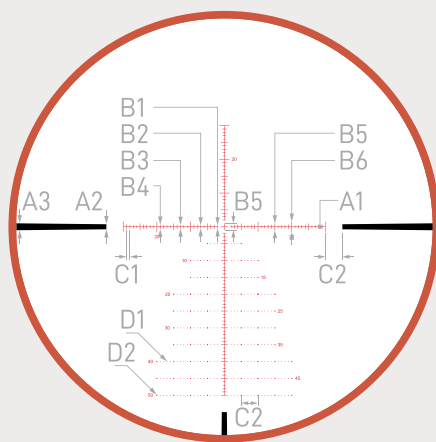

APLR6 FFP IR MOA reticle has a 2 moa floating center cross with 1 moa hash mark increments and drop lines in 5 moa increments on vertical direction down to 50 moa, both of which help you quickly lock in your target and set holdover positions. The gap between the floating center cross and the first hash mark is 1 moa at four directions. The drop lines have smaller dots with 1 moa in between and bigger dots at each 5 moa interval, starting 10 moa length horizontally and end up 40 moa in length at the 50 moa drop line. The unique design of having the floating center cross with 2 moa span in the middle provides little to no target obstruction for engaging small targets at long distances.


#### SUBTENSIONS IN MOA

A1	A2	A3	B1	B2	B3	B4
0.12*	1.5	2	0.7	0.9	1.1	1.3
B5	B6	C1	C2	D1	D2	
2	3	1	5	0.2	0.3	

\*4-20x50: A1 = 0.17  
6-24x56: use table

### HELOS BTR GEN2

#### APRS6 FFP IR MIL

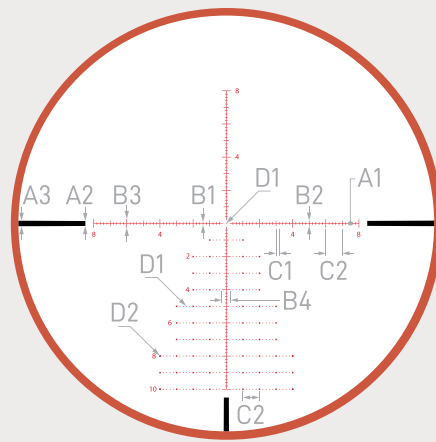

APRS6 FFP IR MIL reticle is designed for Precision Rifle Series competition and any other long-range applications that require accurate ranging capability. It can help you quickly determine distance, hold-over positions, windage correction and leads for a moving target. The unique design of fine 0.2 mil hash mark increments from center to four directions helps the shooter set a quick elevation or windage holdover position. The floating 0.05 mil center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.


#### SUBTENSIONS IN MIL

A1	A2	A3	B1	B2	B3
0.033*	0.3	0.4	0.18	0.35	0.55
B4	C1	C2	D1	D2	
0.4	0.2	1	0.05	0.1	

\*4-20x50: A1 = 0.05  
6-24x56: use table

### HERAS SPR

#### AAGR1 SFP MOA

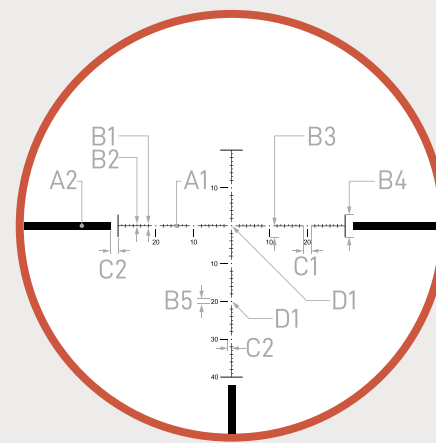

AAGR1 SFP MOA reticle has a 0.3 moa floating center dot and 1 moa increment hash marks in all four directions, which help you quickly lock in your target. The unique design of having floating dots at every 10 moa and 1 moa increment hash marks offers the shooter great reference points on the reticle with little to no view obstruction and helps set any holdover position within a blink of an eye.


\*for 2-12x42:  
subtension valid @ 12x

#### SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	B4
0.14	2	1	0.4	3	6
B5	C1	C2	C3	D1	
1.2	2	1	2	0.3	

### HERAS SPR

#### AAGR2 SFP MOA

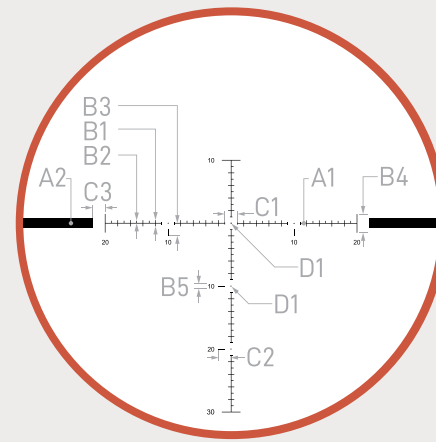

AAGR2 SFP MOA reticle has a 0.2 moa floating center dot and 1 moa increment hash marks, which help you quickly lock in your target. The unique design of having floating dots at every 10 moa and 1 moa increment hash marks offers the shooter great reference points on the reticle with little to no view obstruction and helps set any holdover points within a blink of an eye.


\*for 4-20x50:  
subtension valid @ 20x

#### SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	B4
0.12	1.5	1	0.4	2	3
B5	C1	C2	C3	D1	
0.7	2	1	2	0.2	

### HERAS SPR

#### AAGR1 SFP MIL

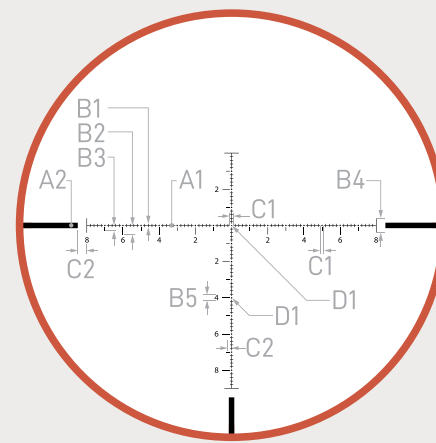

AAGR1 SFP MIL reticle is designed for short and mid-distance shooting with a floating center dot and 0.2 mil hash mark increments in all four directions, that can help you quickly lock in your target and set holdover positions and leads for a moving target. The dots at every 1 mil with 0.2 mil hash marks in between offer greater precision than the classic Mil-Dot reticle. The 0.07 mil floating center dot draws a shooter's vision right on target enabling him or her to engage a small target at long distance with little to no view obstruction.


\*for 2-12x42:  
subtension valid @ 12x

#### SUBTENSIONS IN MIL

A1	A2	B1	B2	B3
0.03	0.3	0.18	0.5	0.3
B4	B5	C1	C2	D1
1	0.4	0.2	0.5	0.07

### HERAS SPR

#### AAGR2 SFP MIL

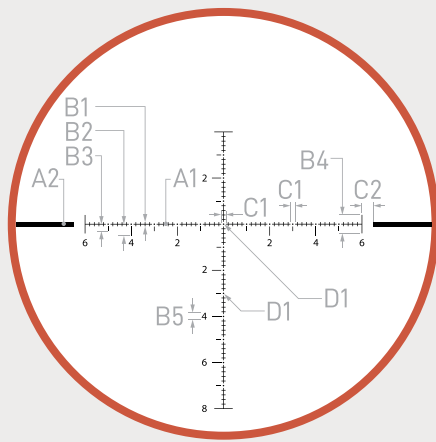

AAGR2 SFP MIL reticle is designed for mid and long-distance shooting with a floating center dot and 0.2 mil hash mark increments in all four directions, that can help you quickly lock in your target and set holdover positions and leads for a moving target. The dots at every 1 mil with 0.2 mil hash marks in between offer greater precision than the classic Mil-Dot reticle. The 0.05 mil floating center dot draws a shooter's vision right on target enabling him or her to engage a small target at long distance with little to no view obstruction.

\*for 4-20x50:  
subtension valid @ 20x

#### SUBTENSIONS IN MIL

A1	A2	B1	B2	B3
0.02	0.2	0.18	0.5	0.3
B4	B5	C1	C2	D1
1	0.24	0.2	0.5	0.05








### HERAS SPR

#### APLR7 SFP IR MOA

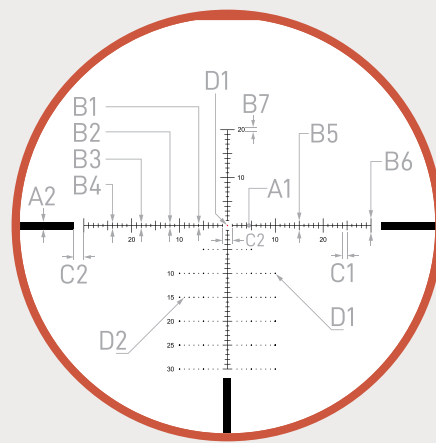

APLR7 SFP IR MOA reticle has an illuminated floating center dot and 1 moa increment hash marks, which help you quickly lock in your target and set holdover positions. The illuminated 0.3 moa center dot helps the shooter quickly locate the target and lock it on the center within a blink of an eye. The illumination provides excellent low light visibility. The 1 moa increment dots on the drop lines offer great precision for wind hold over points down to 30 moa below the center.


\*for 6-24x56:  
subtension valid @ 24x

#### SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	B4	B5
0.12	1.6	0.7	0.9	1.1	1.3	2
B6	B7	C1	C2	D1	D2	
3	1	1	2	0.3	0.2	

### HERAS SPR

#### APLR9 FFP IR MOA

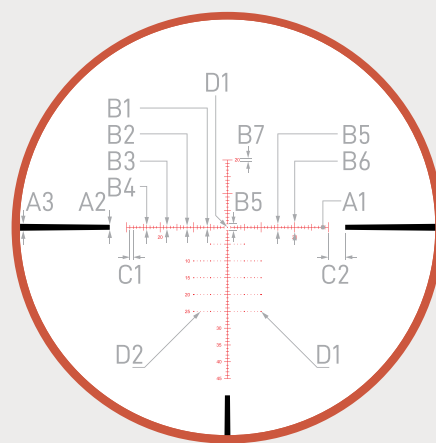


APLR9 FFP IR MOA reticle has a 0.3 moa floating center dot with 1 moa hash mark increments and drop lines in 5 moa increments on vertical direction down to 25 moa, both of which help you quickly lock in your target and set holdover positions. The gap between the center of the floating dot and the first hash mark is 1 moa at four directions. The drop lines have smaller dots with 1 moa in between and bigger dots at each 5 moa, starting 10 moa length horizontally and end up 20 moa in length at the 25 moa drop line. The floating center dot in the middle provides little to none target obstruction for engaging small targets at long distances.

#### SUBTENSIONS IN MOA

A1	A2	A3	B1	B2	B3	B4
0.11	1.6	2	0.7	0.9	1.1	1.3
B5	B6	B7	C1	C2	D1	D2
2	3	1	1	5	0.3	0.2

### HERAS SPR

#### APRS7 SFP IR MIL

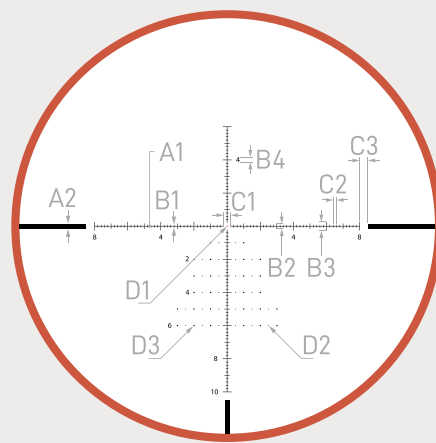

APRS7 SFP IR MIL reticle is designed for long and mid-distance shooting with an illuminated floating center dot and 0.2 mil hash mark increments from center to all four directions, that can help you quickly lock in your target and set holdover positions and leads for a moving target. The illuminated 0.07 mil center dot provides excellent low light visibility and draws a shooter's vision right on target enabling him or her to engage a small target at long distance with little to no view obstruction.


\*for 6-24x56:  
subtension valid @ 24x

#### SUBTENSIONS IN MIL

A1	A2	B1	B2	B3	B4
0.03	0.3	0.18	0.35	0.55	0.3
C1	C2	C3	D1	D2	D3
0.4	0.2	0.5	0.07	0.05	0.09

### HERAS SPR

#### APRS9 FFP IR MIL

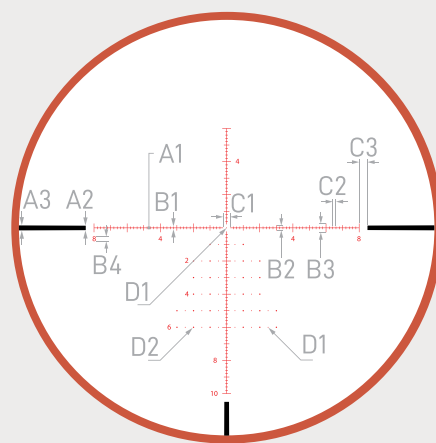


APRS9 FFP IR MIL reticle is designed for Precision Rifle Series competition and any other long-range applications that require accurate ranging capability. It can help you quickly determine distance, hold-over positions, windage correction and leads for a moving target. The unique design of fine 0.2 mil hash mark increments from center to four directions helps the shooter set a quick elevation or windage hold-over position. The floating 0.04 mil center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

#### SUBTENSIONS IN MIL

A1	A2	A3	B1	B2	B3
0.033	0.3	0.4	0.18	0.35	0.55
B4	C1	C2	C3	D1	D2
0.3	0.4	0.2	0.5	0.04	0.08

### HERAS SPR

#### APRS8 SFP IR MIL

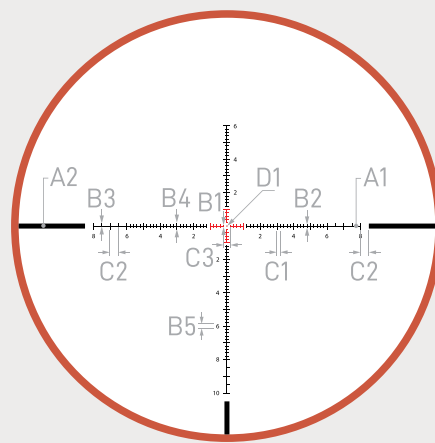

APRS8 SFP IR MIL reticle is designed for mid and long-distance shooting with illuminated 2 mil span center and 0.2 mil hash mark increments from center to all four directions, that can help you quickly lock in your target and set holdover positions and leads for a moving target. The illuminated 2 mil span center with 0.07 mil floating center dot provides excellent low light visibility and draws a shooter's vision right on target enabling him or her to engage a small target at long distance with little to no view obstruction.


\*for 6-24x56:  
subtension valid @ 24x

#### SUBTENSIONS IN MIL

A1	A2	B1	B2	B3	B4
0.03	0.3	0.1	0.18	0.15	0.4
B5	C1	C2	C3	D1	
0.3	0.2	0.5	0.4	0.07	

### ARGOS BTR GEN3

#### ABLR4 SFP MOA - NEW

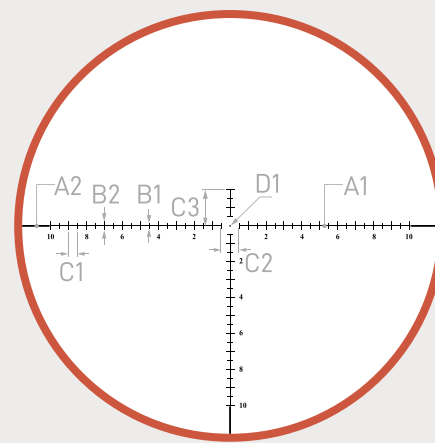

ABLR4 SFP MOA reticle is designed to maximize your performance for both Bench Rest and F-Class shooting applications. Fine line thickness of the reticle (0.016 moa) allows for pinpoint precision at extreme ranges, especially on smaller targets. A non-illuminated floating center dot (0.09 moa thick) provides a precise aiming point. This reticle combined with the Argos BTR GEN3 Rifle scope provides the perfect solution.


\*for 10-40x56:  
subtension valid @ 40x

#### SUBTENSIONS IN MOA

A1	A2	B1	B2
0.016	0.1	0.3	0.5
C1	C2	C3	D1
0.5	1	2	0.09

### HERAS SPR

#### BLR2 SFP MOA

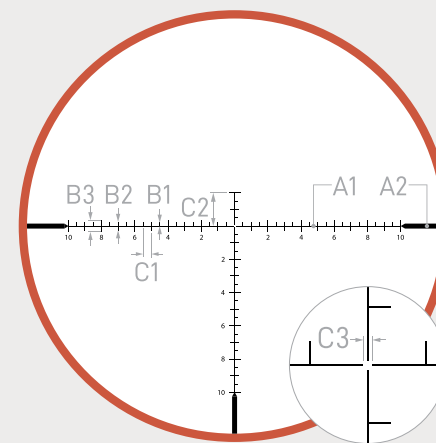


BLR2 SFP MOA reticle is designed to maximize your performance for both Bench Rest and F-Class shooting applications. Fine line thickness of the reticle (0.018 moa) allows for pinpoint precision at extreme ranges, especially on smaller targets. A 0.075 moa opening at the center provides a precise aiming point with less obstruction over your view of your target. This reticle combined with the Heras SPR rifle scope provides the perfect solution.

#### SUBTENSIONS IN MIL

A1	A2	B1	B2
0.018	0.3	0.2	0.5
B3	C1	C2	C3
0.7	0.5	2	0.075

### ARGOS BTR GEN3

#### APLR11 FFP IR MOA - NEW

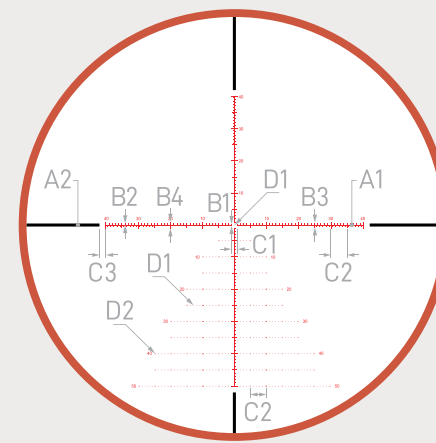

APLR11 FFP IR MOA reticle has the entire reticle illuminated with 1 moa hash mark increments and drop lines in 5 moa increment on vertical direction down to 50 moa vertical and 40 horizontal, both of which help you quickly lock in your target and set holdover positions. The reticle features our .2 moa floating center dot which eliminated the concern for target obstruction. The unique design of having droplines going down to 50 moa with 5 moa between each drop line and 1 moa hash marks in between provide excellent hold over positions for long precision shooting.


#### SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	B4
0.14	1	0.6	0.5	1.5	2
C1	C2	C3	D1	D2	
2	5	2	0.2	0.3	

\*for 6-24x50: subtension valid @ 24x  
\*for 8-34x56: subtension valid @ 34x



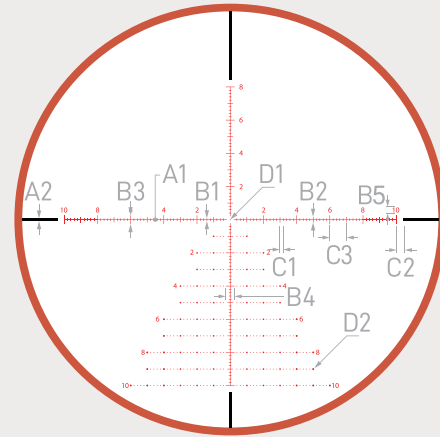


**ARGOS BTR GEN3**  
 APRS11 FFP IR MIL - **NEW**


APRS11 FFP IR MIL reticle is designed to maximize your performance on long and mid-distance shooting with an illuminated reticle and .04 mil floating center dot. The APRS11 IR MIL reticle can help you quickly lock in your target and set holdover positions and leads for a moving target. The illuminated 10 mil span cross lines with 0.2 mil hash marks running the entire 10 mils provide finer details that helps the shooter quickly locate the target and find a holdover position within higher level of precision and confidence.

**SUBTENSIONS IN MIL**

A1	A2	B1	B2	B3	B4
0.03	0.2	0.18	0.35	0.55	0.4
B5	C1	C2	C3	D1	D2
0.45	0.2	0.4	1	0.04	0.09

\*for **6-24x50**: subtension valid @ 24x  
 for **8-34x56**: subtension valid @ 34x

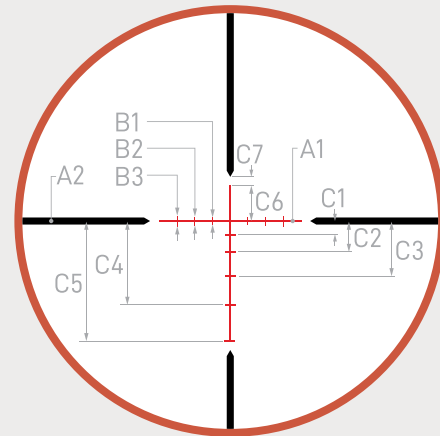
**ARGOS HMR**  
 BDC 600A IR


BDC 600A IR reticle can be used effectively with a variety of firearms as it provides accurate ranges and reference marks that can be used to compensate for bullet drift in windy conditions or range distances. The user can sight in at 100 yards on any magnification setting, but for the ballistic reticle feature to function properly, the scope's magnification must be set to the correct power.

**SUBTENSIONS IN MOA**

A1	A2	B1	B2	B3	C1
0.15	0.6	0.8	1	1.2	1.5
C2	C3	C4	C5	C6	D1
3.5	6.25	9.5	13.6	4	1

\*for **2-12x42**: subtension valid @ 12x  
 for **4-20x50**: subtension valid @ 20x

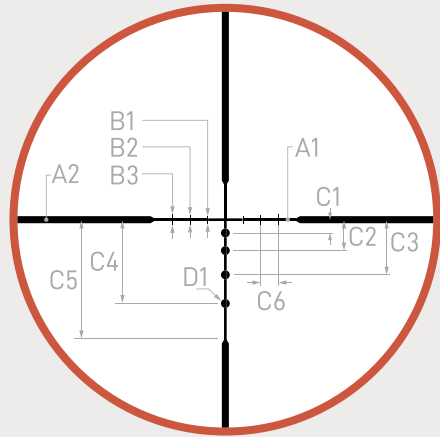
**ARGOS HMR**  
 BDC 600


BDC 600 reticle can be used effectively with a variety of firearms as it provides accurate ranges and reference marks that can be used to compensate for bullet drift in windy conditions or range distances.

\*for **2-12x42**: subtension valid @ 12x  
 for **4-20x50**: subtension valid @ 20x

**SUBTENSIONS IN MOA**

A1	A2	B1	B2	B3	C1
0.3	0.8	0.8	1	1.2	1.5
C2	C3	C4	C5	C6	D1
3.5	6.25	9.5	13.6	2	1

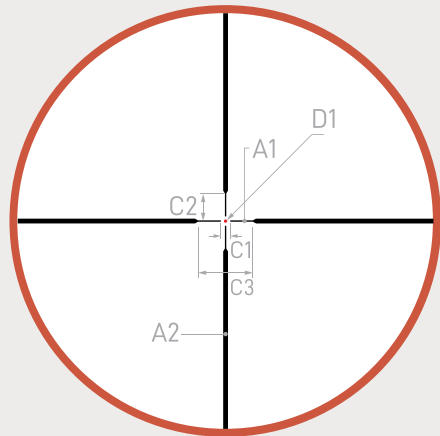
**ARGOS HMR**  
 AHMC SFP MOA


AHMC SFP IR MOA is a traditional hunting style reticle with an illuminated center-dot. The outside crosshair is bold, and prominently stands out against backgrounds that are tough to differentiate. It tapers down to a fine crosshair with a floating center-dot to reduce target obstruction, while drawing your eye to the center of the reticle.

\*for **2-12x42**: subtension valid @ 12x  
 for **4-20x50**: subtension valid @ 20x

**SUBTENSIONS IN MOA**

A1	A2	C1
0.25	0.9	2
C2	C3	D1
6.5	13	0.7

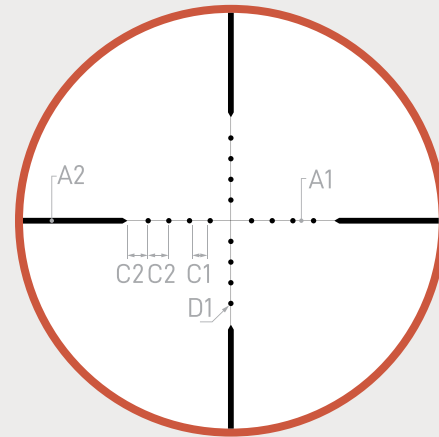
**ARGOS HMR / TALOS**  
 MIL-DOT


Mil-Dot reticle is one of the most accurate, versatile means of estimating ranges using a manual optical device. The MIL-DOT allows the user to do range estimations, holdover and wind drift compensation as well as for precise leads for moving targets.

\*for **4-20x50**: subtension valid @ 20x  
 for **3-12x40**: subtension valid @ 12x  
 for **4-16x40**: subtension valid @ 16x

**SUBTENSIONS IN MIL**

A1	A2	C1
0.05	0.25	0.75
C2	D1	
1	0.25	

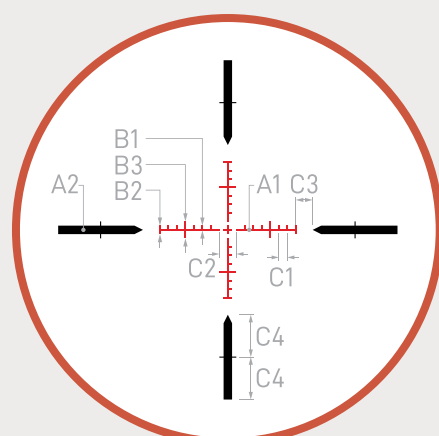
**TALOS BTR GEN2**  
 AHSR14 SFP IR MIL


AHSR 14 SFP IR MIL reticle is designed to maximize your performance on short range shooting with illuminated 1 mil center cross and 1 mil hash mark increments extended to 8 mils on both horizontal and vertical directions and can help you quickly spot your target and set holdover positions and leads for a moving target. The illuminated 16 mil center with an 1 mil center cross (0.5 mil from center to the side) and 10 mil black lines enable a shooter to quickly locate the target and put it right on the center cross within a blink of an eye. The illuminated portion of the reticle provides excellent low light visibility.

\*for **1-4x24**: subtension valid @ 4x

**SUBTENSIONS IN MIL**

A1	A2	B1	B2	B3
0.13	1	0.5	1	2
C1	C2	C3	C4	
1	2	2	5	

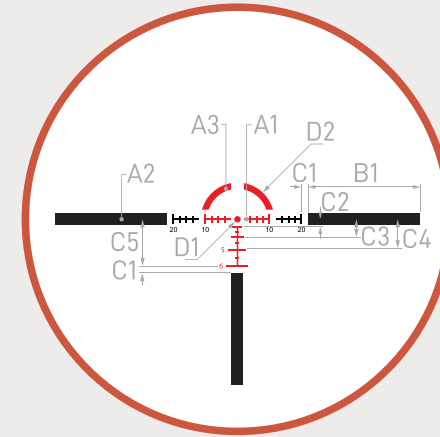
**TALOS BTR GEN2**  
 ATMR6 SFP IR MOA


ATMR6 SFP IR MOA reticle is designed for fast CQB or mid-range engagements. The 2 moa center dot with 20 moa illuminated quartered half circle aids in rapid acquisition for close range targets or hunting and stalking in thick brush. The drop compensation is suitable for many standard and magnum calibers out to 600 yards.

\*for **1-4x24**: subtension valid @ 4x

**SUBTENSIONS IN MOA**

A1	A2	A3	B1	C1	C2
0.45	3.5	2	35	2	2.4
C3	C4	C5	D1	D2	
5.6	9.5	14.6	2	23	

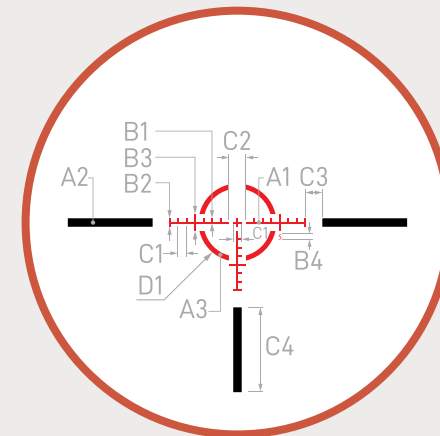**TALOS BTR GEN2**  
 ATMR7 SFP IR MIL


ATMR7 SFP IR MIL reticle is designed to maximize your performance on short and mid-distance shooting with illuminated center cross and 1 mil hash mark, the ATMR7 SFP IR MIL reticle can help you quickly lock in your target and set holdover positions and leads for a moving target. The illuminated 16 mil span cross lines with 1 mil hash marks and 10 mil circle provide great visual reference for quick target acquisition.

\*for **1-4x24**: subtension valid @ 4x


**SUBTENSIONS IN MIL**

A1	A2	A3	B1	B2	B3
0.13	1	0.6	0.5	1	2
B4	C1	C2	C3	D1	D2
0.6	1	2	2	10	9.2





### TALOS BTR GEN2 APLR10 FFP IR MOA

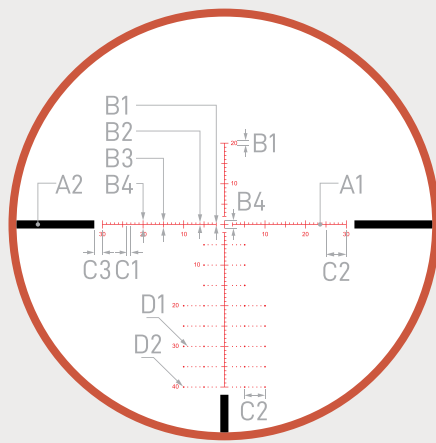


APLR10 FFP IR MOA reticle has a 2 moa floating center cross with 1 moa hash mark increments and drop lines in 5 moa increments on vertical direction down to 40 moa, both of which help you quickly lock in your target and set holdover positions. The gap between the floating center cross and the first hash mark is 1 moa at four directions. The drop lines have smaller dots with 1 moa in between and bigger dots at each 5 moa interval, starting 10 moa length horizontally and end up 20 moa in length at the 40 moa drop line. The unique design of having the floating center cross with 2 moa span in the middle provides little to no target obstruction for engaging small targets at long distances.

#### SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	B4
0.14	2	1	0.5	1.5	2
C1	C2	C3	D1	D2	
1	5	2	0.25	0.4	

### TALOS BTR GEN2 APLR2 FFP IR MIL

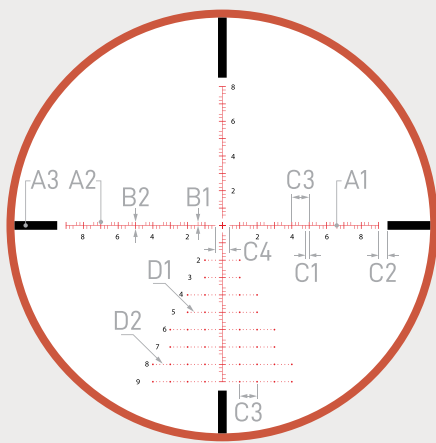


APLR2 FFP IR MIL reticle is designed to maximize your performance on precision long and mid range shooting with accurate ranging capability. It will help you quickly determine distance, holdover positions, windage correction and leads for a moving target. The unique design of fine .2 mil hash mark, having .2 and .4 on one side of either horizontal or vertical line and .6 and .8 on another side, helps the shooter quickly locate a holdover position with .2 mil increments within a blink of an eye. The illuminated fine reticle provides excellent low light visibility and windage holdovers on the bullet droplines all the way up to 9 mils with .2 mil marks increments between.

#### SUBTENSIONS IN MIL

A1	A2	A3	B1	B2	C1
0.025	0.04	0.5	0.1	0.2	0.2
C2	C3	C4	D1	D2	
0.5	1	0.8	0.05	0.1	

### TALOS BTR GEN2 APRS10 FFP IR MIL

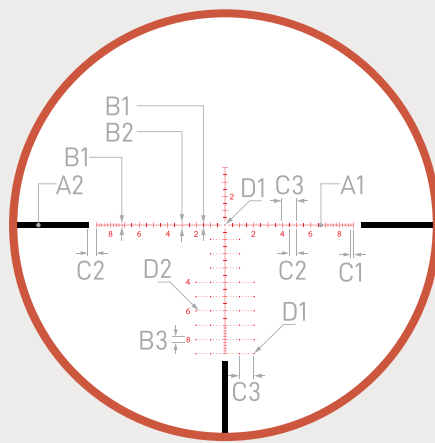


Designed for precision long to mid-range shooting applications, the APRS10 FFP IR MIL reticle can be used to effectively determine ranges, holdovers, windage and moving lead corrections. The unique design of a fine 0.1 mil floating center dot helps the shooter set a precise aiming point over their target. The illuminated reticle provides excellent low light visibility and windage holdovers on the bullet drop lines all the way up to 9 mils.

#### SUBTENSIONS IN MOA

A1	A2	B1	B2	B3
0.04	0.4	0.25	0.4	0.5
C1	C2	C3	D1	D2
0.2	0.5	1	0.1	0.05

### TALOS BTR GEN2 APRS2A SFP MIL

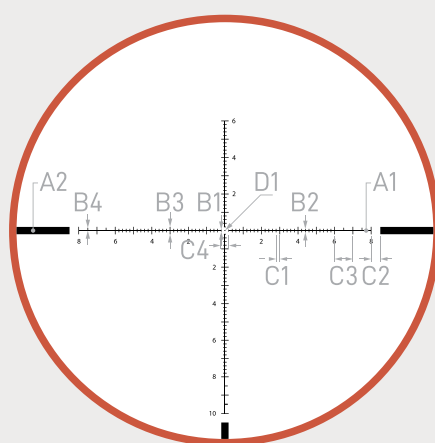


APRS2A SFP MIL reticle is designed for precision rifle series competition and any other long range shooting applications with accurate ranging capability. It can help you quickly determine distance, holdover positions and windage corrections. The unique design of fine .2 mil hash mark increments from center to 6 mils to both left and right helps the shooter set a quick windage holdover position after he or she dialed in elevation on their targets. The floating 0.09 center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

#### SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	B4
0.04	0.4	0.1	0.18	0.4	0.15
C1	C2	C3	C4	D1	
0.2	0.5	1	0.4	0.09	

### TALOS BTR GEN2 AAGR1 SFP MOA

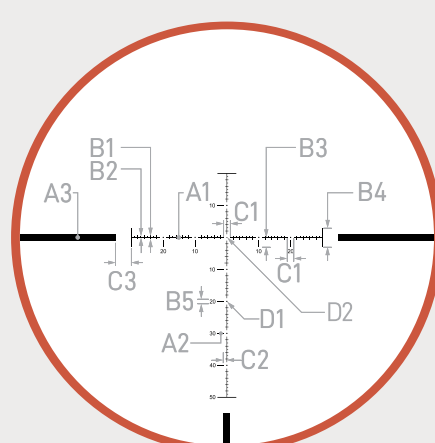


AAGR1 SFP MOA reticle has a 0.3 moa floating center dot and 1 moa increment hash marks in all four directions, which help you quickly lock in your target. The unique design of having floating dots at every 10 moa and 1 moa increment hash marks offers the shooter great reference points on the reticle with little to none view obstruction and helps set any holdover position within a blink of an eye.

#### SUBTENSIONS IN MIL

A1	A2	A3	B1	B2	B3	B4
0.15	0.2	2	1	0.4	3	6
B5	C1	C2	C3	D1	D2	
1.2	2	1	5	0.4	0.3	

### TALOS CB100 SFP IR MOA

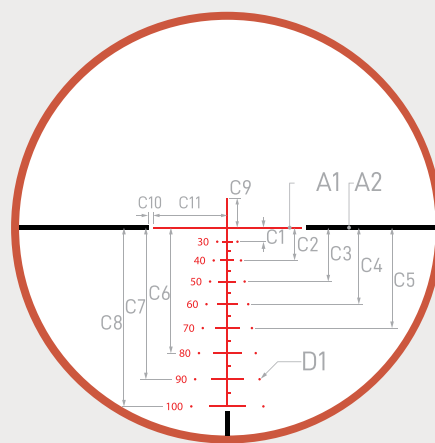


CB100 is specially designed for crossbow with arrow speed from 300FPS to 500 FPS. The illuminated center provides great visibility for low light conditions and hold-over points up to 100 yards for different arrow speeds.

#### SUBTENSIONS IN MOA

A1	A2	C1	C2	C3	C4	C5
0.6	2	5.73	13.34	21.9	31.09	40.79
C6	C7	C8	C9	C10	C11	D1
50.95	61.55	72.57	12	2	30	1

### TALOS BDC 250 SHOTGUN IR

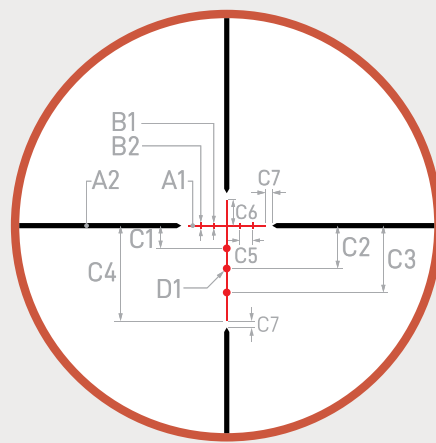


Athlon's BDC 250 IR Shotgun Reticle is designed to accommodate rifled barrels utilizing sabot slugs as well smooth-bore shotguns using rifled slugs. This reticle is suitable for both 12 and 20 gauge.

\*for 3-12x40:  
subtension valid @ 12x

#### SUBTENSIONS IN MOA

A1	A2	B1	B2	C1	C2
0.3	0.8	0.8	1	3.5	6.6
C3	C4	C5	C6	C7	D1
10.3	14.7	2	4	1	1.2

### TALOS BDC 600 IR

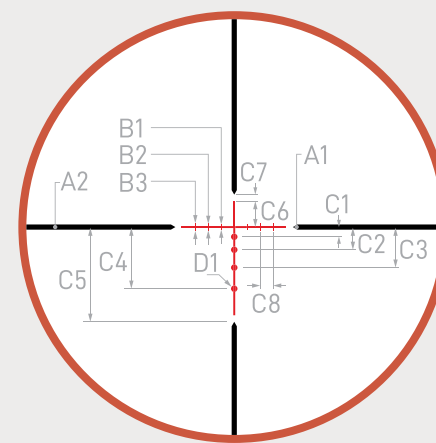

BDC 600 IR was designed to deliver a high level of precision at extended targets that can be used with today's most popular rifle cartridges.

\*for 3-12x40: subtension valid @ 12x  
for 4-16x40: subtension valid @ 16x  
for 6-24x50: subtension valid @ 24x

#### SUBTENSIONS IN MOA


A1	A2	B1	B2	B3	C1	C2
0.3	0.8	0.8	1	1.2	1.5	3.5
C3	C4	C5	C6	C7	C8	D1
6.25	9.5	13.6	4	1	2	1





### TALOS

#### ATMR1 SFP IR MIL

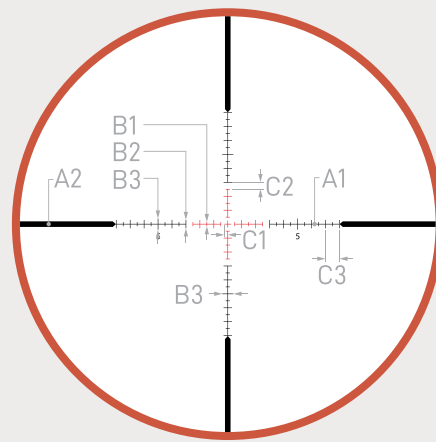

ATMR1 SFP IR MIL reticle is perfect for shooting at the range or competing in competitions. The customized mil hash mark design helps to eliminate any guesswork with holdover and windage adjustments. The illuminated reticle is great for low light situations when you need to count on a good, accurate shot.


\*for 6-24x50: subtension valid @ 18x

#### SUBTENSIONS IN MIL

A1	A2	B1	B2
0.02	0.5	0.3	0.6
B3	C1	C2	C3
0.8	0.25	0.5	1

### TALOS / NEOS

#### CENTER X

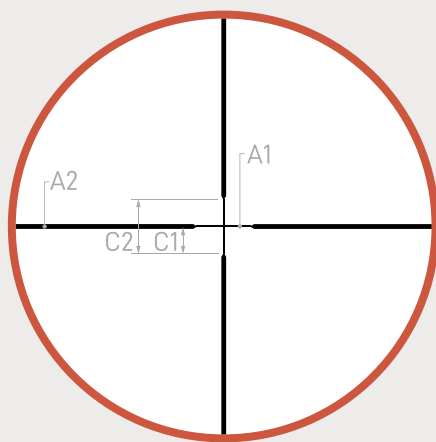

Center X reticle is a perfect choice for shooters wishing to have a clear field of view with a more traditional crosshair. The Center X reticle allows shooters to quickly view their target while maintaining one distinct aiming point on their reticle. The heavy posts stand out nicely against cover and in twilight conditions, pointing boldly to the intersection.

\*for 3-9x40: subtension valid @ 9x  
 for 3-12x40: subtension valid @ 12x  
 for 4-12x40: subtension valid @ 12x  
 for 6-18x44: subtension valid @ 18x


#### SUBTENSIONS IN MOA

MODEL	A1	A2	C1	C2
3-9x40	0.25	0.9	6.5	13
3-12x40	0.18	0.7	4.5	9

MODEL	A1	A2	C1	C2
4-12x40	0.18	0.7	4.5	9
6-18x44	0.12	0.5	3.2	6.5

### NEOS

#### BDC 300 STRAIGHT-WALL IR

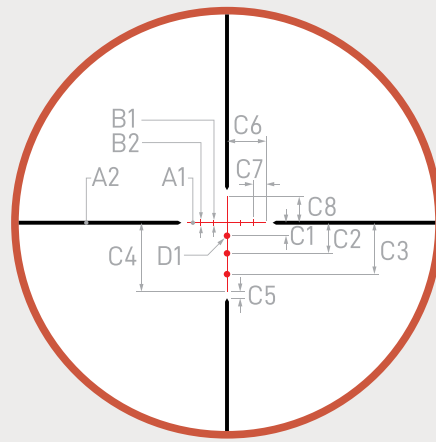

BDC 300 Straight-wall IR was designed to deliver a high level of confidence at extended targets that can be used with today's most popular straight-wall cartridges.


\*for 3-9x40: subtension valid @ 9x

#### SUBTENSIONS IN MOA

A1	A2	B1	B2	C1	C2	C3
0.15	0.6	0.8	1	2	4.7	7.9
C4	C5	C6	C7	C8	D1	
10.6	1	6	2	4	1.2	

### NEOS

#### BDC 500 IR

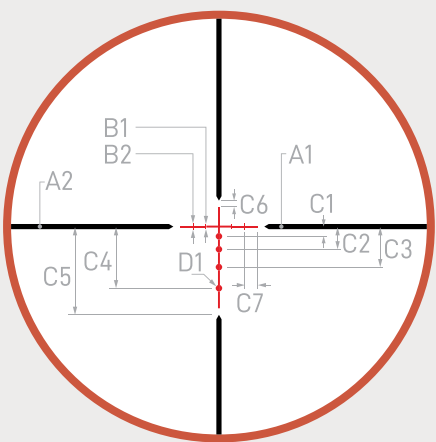

BDC 500 IR was designed to deliver a high level of precision at extended targets that can be used with today's most popular rifle cartridges.


\*for 3-9x40: subtension valid @ 9x  
 for 4-12x40: subtension valid @ 12x  
 for 6-18x44: subtension valid @ 18x

#### SUBTENSIONS IN MOA

A1	A2	B1	B2	C1	C2
0.3	0.8	0.8	1	1.5	3.5
C3	C4	C5	C6	C7	D1
6.25	9.5	13.6	1	2	1

### NEOS

#### BDC 22 RIMFIRE

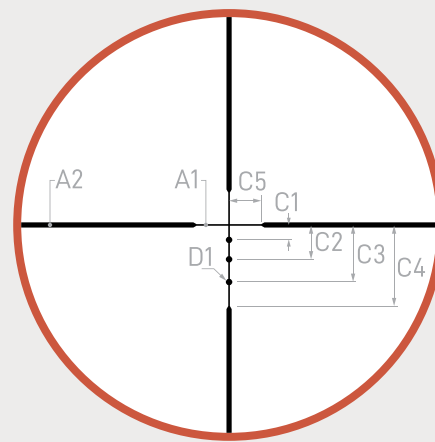

BDC 22 Rimfire reticle was designed specifically for rimfire. This reticle allows shooters to compensate for bullet drop at extended shooting distances. When using a .22 LR with a muzzle velocity of approximately 1,250 feet per second, this reticle is designed to be zeroed at 50 yards, providing bullet drop compensation for 75, 100, 125 and 150 yards.


\*for 3-9x40: subtension valid @ 9x  
 for 4-12x40: subtension valid @ 12x

#### SUBTENSIONS IN MOA

A1	A2	C1	C2
0.25	0.8	2.3	5.3
C3	C4	C5	D1
8.8	12.5	5	1

### NEOS

#### BDC 250 MUZZLE LOADER IR

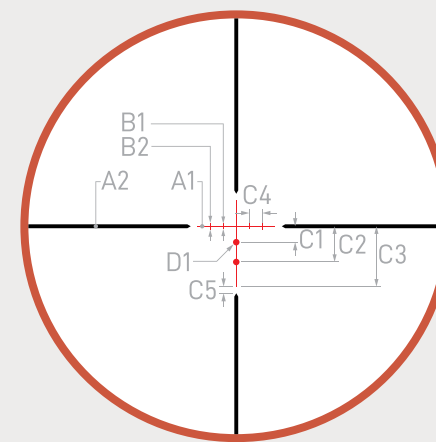

BDC 250 Muzzle Loader IR was designed to deliver a high level of confidence at extended targets that can be used with today's most popular muzzle loader rounds.

\*for 3-9x40: subtension valid @ 9x


#### SUBTENSIONS IN MOA

A1	A2	B1	B2	C1
0.15	0.6	0.8	1	2.45
C2	C3	C4	C5	D1
5.5	9.3	2	1	1.2

## BINO RETICLES

### MIDAS G2 UHD

#### ATBR MIL

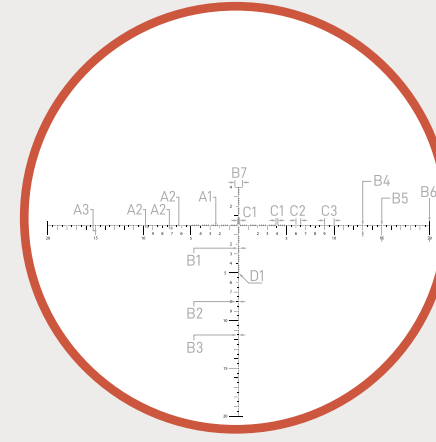

ATBR MIL reticle is designed for the precision marksman team looking to provide precise shot corrections. The .2 mil subtension spacing out to 5 mils in 3 directions assists shooters in making corrections, ranging targets, and calculating target movement speeds.

#### SUBTENSIONS IN MIL


A1	A2	A3	B1	B2	B3	B4
0.03	0.04	0.05	0.18	0.3	0.2	0.5
B5	B6	B7	C1	C2	C3	D1
1	1.5	0.8	0.2	0.5	1	0.65



## SPOTTING SCOPE RETICLES

### CRONUS G2 UHD

TSSR FFP MIL

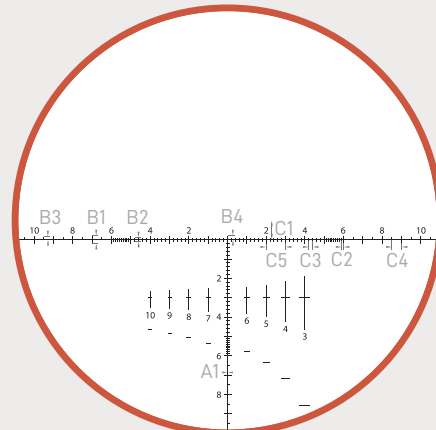


TSSR FFP MIL reticle is designed for tactical spotting scope for all types of ranging applications. The reticle has 0.2 mil hash marks from the center extended into three directions. The "T" shape reticle with the horizontal base line 1 mil below the center of the field of view will not block the spotter's view.

#### SUBTENSIONS IN MIL

A1	B1	B2	B3	B4
0.028	0.4	0.2	0.15	0.2
C1	C2	C3	C4	C5
1	0.1	0.2	0.5	1

### ARES G2 UHD

TSSR2 SFP MIL

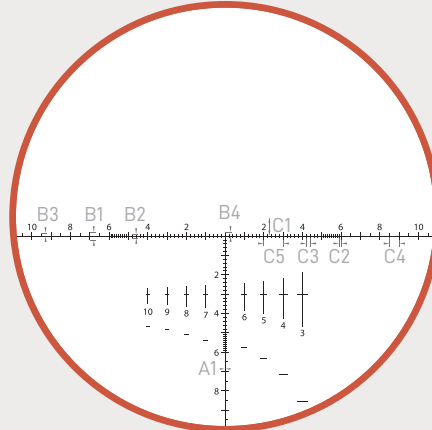

TSSR2 SFP MIL reticle is designed for tactical spotting scope for all types of ranging applications. The reticle has 0.2 mil hash marks from the center extended into three directions. Identical to the TSSR MIL reticle with one difference; The windage holds end at 18 mils versus 24 mils on the TSSR.


#### SUBTENSIONS IN MIL

A1	B1	B2	B3	B4
0.028	0.4	0.2	0.15	0.2
C1	C2	C3	C4	C5
1	0.1	0.2	0.5	1

## RED DOT SIGHT RETICLES

### MIDAS EDC PRO / BEAM / BURST

3 MOA DOT

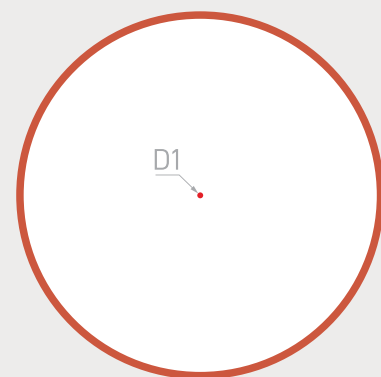


#### SUBTENSIONS IN MOA

D1
3

### TALOS EDC

3 MOA DOT

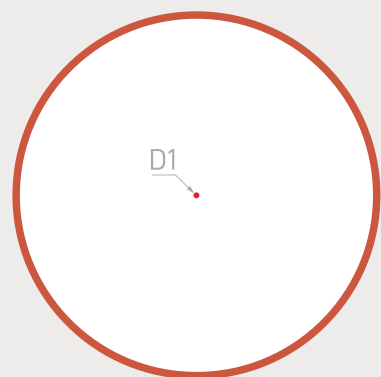


#### SUBTENSIONS IN MOA

D1
3

### MIDAS BLAZE / STROBE

2 MOA DOT

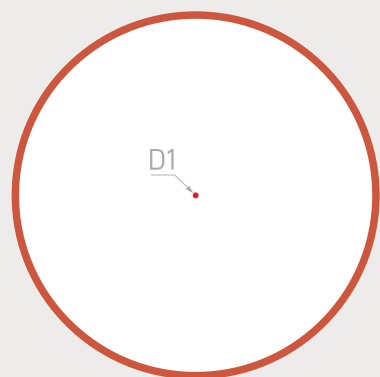


#### SUBTENSIONS IN MOA

D1
2

## PRISM SCOPE RETICLES

### MIDAS FLARE 1X

APX1

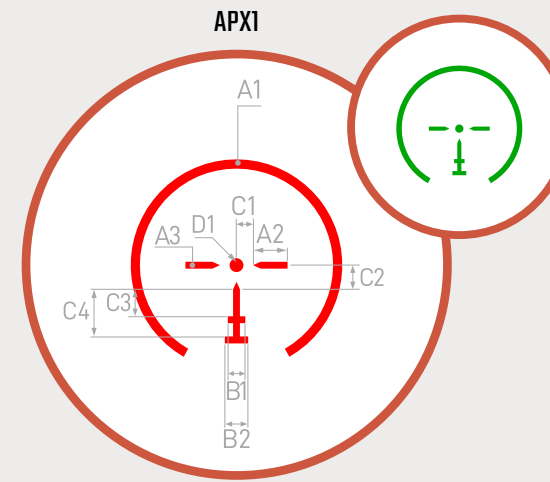


#### SUBTENSIONS IN MOA

A1	A2	A3	B1	B2
4	15	3	7.6	10.2
C1	C2	C3	C4	D1
7.2	10.5	13.2	22	6

### MIDAS FLARE 3X / FLARE 5X

APX3

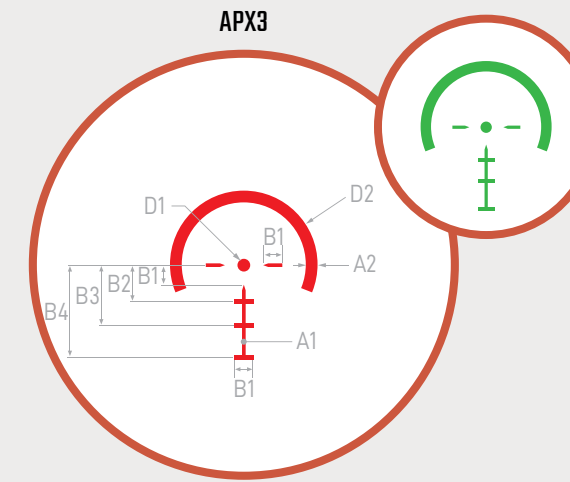

#### SUBTENSIONS IN MOA

A1	A2	B1	B2
0.5	1.8	3	5.6
B3	B4	D1	D2
9.5	14.6	2	24





### CRONUS ATS 35ML-400 THERMAL MONOCULAR



The thermal/rangefinder combination is game changing. At daytime, the thermal helps you pick up game much faster at far distances than by naked eye. I used it to spot a buck at 230 yards (image was great at this range and he was popping out like a beacon of white light) that I would normally have a tough time seeing. I ranged it and had it on the ground in a time frame of about 10 seconds. Instead of glassing, seeing the deer, setting the bins down, bringing up my range finder and ranging, setting that down, picking the rifle up and then shooting, it was done with one optic. If you're like me, love long distance shooting, and you like having an extra edge then this is an awesome tool. Great product, great price.

*Cody M.*

### ARES G2 UHD SPOTTING SCOPE



I used this spotting scope on a Colorado elk hunt. Very clear. Lightweight and easily fits in a side pocket on my pack. The glass was exceptional, and for less than half the price of some other known name brands. I paired mine with a Magview phone adapter and was able to get great video and pictures from 1200-1800 yards away. I would recommend this spotting scope to anyone backpacking into the wilderness who needs a compact scope.

*Teddy W.*

### HELOS BTR GEN2 RIFLESCOPE



I have the Helos mounted on a long range AR15 at the range out to 600 yards in preparation for longer shots out to 1000. This scope has clarity and adjustments to use a 20MOA rail and still get on target at 100 — something my Zeiss V4 6-24 cannot do! The Zeiss has slightly better clarity but is twice the price. At longer ranges, the Athlon really shines. It tracks perfectly and the reticle is very easy to use too. For further testing, I moved this scope to a long range 30-06 for a 900-yard shot. It did well and tracked perfectly through a myriad of targets at various distances. I have recently purchased an Ares ETR UHD Rifle scope because of how well this Helos performs.

*Ronald H.*

### MIDAS G2 UHD BINOCULARS



These Athlon Midas binoculars completely surprised me. I work as a professional Expedition Leader and Guide for a national expedition company, and I work primarily in the polar regions. For years, I've relied on my Swarovski binoculars due to their quality. I spend hours staring through my bins searching for whales or polar bears, and eye strain can be an issue with less expensive binoculars. I purchased a pair of the Athlon on Expert Voice to test them for some colleagues who didn't want to spend thousands of dollars on binoculars. "Wow" is all I can say about these. They are bright, sharp, and easy to focus. After 8 months of use, I find them able to hold up to the daily use in challenging conditions like rain, snow, freezing temps, and getting knocked around climbing into boats. These Athlon bins will stand up to any comparison to any 8 x 42 binoculars of the major brands. I have been recommending them to all my colleagues looking to purchase great binoculars without shelling out \$1000 or more.

*Doug G.*

### TALOS BTR GEN2 RIFLESCOPE



This scope exceeded all my expectations. It's loaded with features and remarkably clear to look through. I zeroed this scope in only 6 shots. The focus is clear from very close to infinity and the reticle is clear and bright when illuminated. I wish I would've tried Athlon Optics sooner; I could've saved a lot of money! To sum it up: value and quality abound. I'd buy from them again and again.

*Lonnie F.*

### MIDAS HMR HD RIFLESCOPE



The Midas HMR is in my opinion one of the best riflescopes for hunting whitetail that I have ever owned. It gives the ability to power down to 2.5x for fast target acquisition in the woods, then I can zoom to 15x for those occasional long shots. All in all, this is a great product for any hunter. I would rate it on par with other scopes at a much higher price point.

*Frank C.*





A hunter in camouflage gear and a white cap stands in a field of tall grass at sunset. The sun is low on the horizon, creating a warm, golden glow. The hunter is holding a rifle. The background is a dark blue sky with white clouds. A large, stylized arrow graphic points from the left towards the right, with a red and white border.

**SHARP, TIGHT  
AND PRICED  
JUST RIGHT!**

TOLL FREE: 1-855-913-5678  
contact@athlonoptics.com  
[www.athlonoptics.com](http://www.athlonoptics.com)