

PRODUCT	MODEL	RETICLE	SKU#	PAGE
CRONUS ATS PRO THERMAL SCOPE	35L-400	5 MOA RETICLES 5 MIL RETICLES	210136	1/2

### IDEAL APPLICATION



PREDATOR  
HUNTING



VARMINT  
HUNTING

### TOP FEATURES

#### CUTTING-EDGE THERMAL SENSOR

The cutting-edge 12µm pixel thermal sensor offers a high-resolution thermal image and maximum detection range.

#### HIGH-RESOLUTION OLED DISPLAY

A 0.49" OLED display with a 1440 x 1080 resolution provides a sharp, high contrast view with vivid color.

#### BALLISTIC CALCULATOR

Offers precise ballistic data and displays holdovers for real-time distances to your target.

### ALL FEATURES


Laser Rangefinder, Cutting-edge Thermal Sensor, High-resolution OLED Display, Wifi & Bluetooth, 10 Built-in Interchangeable Reticles, 6 Reticle Color Options, 10 Illumination Settings, 128 GB Memory Capacity, Auto Power-OFF, 7 Color Palette Options, 10 Detection Sensitivity, Auto Shot Record, One Shot Zero, Eco Mode, Waterproof, Fog Proof, Shockproof

### RETICLES

#### MOA RETICLES



#### MIL RETICLES

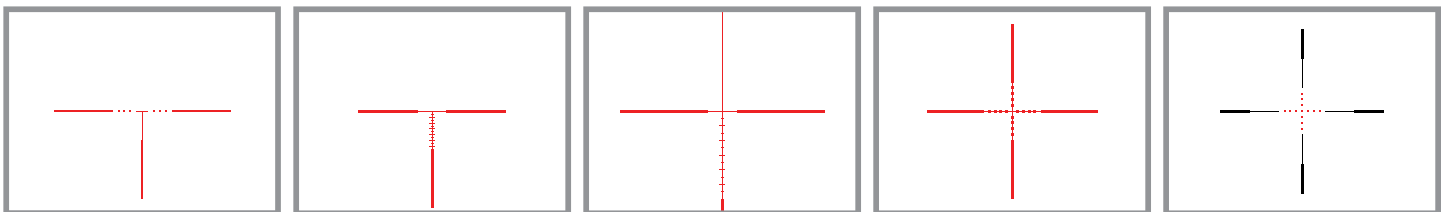

SHARP, TIGHT  
AND PRICED  
JUST RIGHT!

#### RETICLE COLOR OPTIONS




PRODUCT	MODEL	RETICLE	SKU#	PAGE
CRONUS ATS PRO THERMAL SCOPE	35L-400	5 MOA RETICLES 5 MIL RETICLES	210136	2/2

THERMAL SENSOR	400 x 300 @12µm			
NETD	≤25mK @ 77°F/25°C			
DISPLAY RESOLUTION / REFRESH RATE	1440 x 1080 / 50 Hz			
DISPLAY	0.49" OLED			
LENS SYSTEM	35 mm F1.0			
FIELD OF VIEW	7.8° x 5.9°			
BASE MAGNIFICATION	3.3X			
COMBINED MAGNIFICATION	13.2X			
EYE RELIEF	1.9"			
DETECTION RANGE	2620 Yds			
RECOGNITION RANGE	1090 Yds			
COLOR PALETTES	White Hot, Black Hot, Red Hot, Green Hot, Iron Red, Blue Hot, Sepia			
RETICLE	10 Built-in Reticles (5 MOA, 5 MIL)			
RETICLE ADJUSTMENT	Digital			
DISTANCE MEASUREMENT	Laser Ranging 10 - 1600 (±1) Yards			
VIDEO RECORD / SNAPSHOT	1440 x 1080			
BUILT-IN MEMORY	128 GB			
WI-FI CONNECTION	Yes			
STANDBY MODE	Yes			
BATTERY	1 Built-in Battery, and 2 Spare External Batteries			
BATTERY LIFE	≥ 10 h			
EXTERNAL POWER	5V2A Adapter (USB Type-C)			
WORKING TEMPERATURE	-22°F to 122°F / -30°C to 50°C			
WATERPROOF	IP67			
WEIGHT	41.3 oz			
ZEROING PROFILES	10			

### DETAILED DIMENSIONS

L1	L2	L3	L4	L5	L6	D1	D2
14.3"	5.1"	5"	4.2"	1.9"	1.3"	1.75"	2.35"

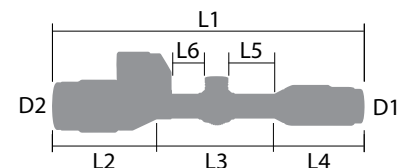

**SHARP, TIGHT  
AND PRICED  
JUST RIGHT!**