

PRODUCT	MODEL	RETICLE	SKU#	PAGE
CRONUS ATS PRO THERMAL SCOPE	50L-640	5 MOA RETICLES 5 MIL RETICLES	210137	1/2

IDEAL APPLICATION



PREDATOR
HUNTING



VARMINT
HUNTING

TOP FEATURES

CUTTING-EDGE THERMAL SENSOR

The cutting-edge 12µm pixel thermal sensor offers a high-resolution thermal image and maximum detection range.

HIGH-RESOLUTION OLED DISPLAY

A 0.49" OLED display with a 1440 x 1080 resolution provides a sharp, high contrast view with vivid color.

BALLISTIC CALCULATOR


Offers precise ballistic data and displays holdovers for real-time distances to your target.

ALL FEATURES


Laser Rangefinder, Cutting-edge Thermal Sensor, High-resolution OLED Display, Wifi & Bluetooth, 10 Built-in Interchangeable Reticles, 6 Reticle Color Options, 10 Illumination Settings, 128 GB Memory Capacity, Auto Power-OFF, 7 Color Palette Options, 10 Detection Sensitivity, Auto Shot Record, One Shot Zero, Eco Mode, Waterproof, Fog Proof, Shockproof

RETICLES

MOA RETICLES

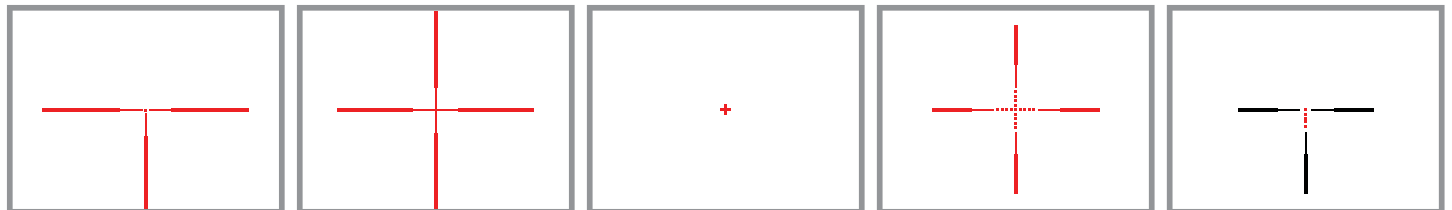

MIL RETICLES

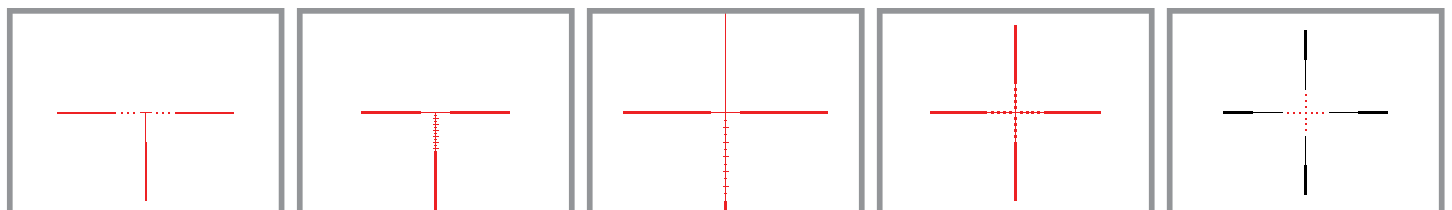

SHARP, TIGHT
AND PRICED
JUST RIGHT!


RETICLE COLOR OPTIONS



PRODUCT	MODEL	RETICLE	SKU#	PAGE
CRONUS ATS PRO THERMAL SCOPE	50L-640	5 MOA RETICLES 5 MIL RETICLES	210137	2/2
THERMAL SENSOR	640 x 480 @12µm			
NETD	≤20mK @ 77°F/25°C			
DISPLAY RESOLUTION / REFRESH RATE	1440 x 1080 / 50 Hz			
DISPLAY	0.49" OLED			
LENS SYSTEM	50 mm F1.0			
FIELD OF VIEW	8.8° x 6.6°			
BASE MAGNIFICATION	2.95X			
COMBINED MAGNIFICATION	23.6X			
EYE RELIEF	1.9"			
DETECTION RANGE	2620 Yds			
RECOGNITION RANGE	1090 Yds			
COLOR PALETTES	White Hot, Black Hot, Red Hot, Green Hot, Iron Red, Blue Hot, Sepia			
RETICLE	10 Built-in Reticles (5 MOA, 5 MIL)			
RETICLE ADJUSTMENT	Digital			
DISTANCE MEASUREMENT	Laser Ranging 10 - 1600 (±1) Yards			
VIDEO RECORD / SNAPSHOT	1440 x 1080			
BUILT-IN MEMORY	128 GB			
WI-FI CONNECTION	Yes			
STANDBY MODE	Yes			
BATTERY	1 Built-in Battery, and 2 Spare External Batteries			
BATTERY LIFE	≥ 10 h			
EXTERNAL POWER	5V2A Adapter (USB Type-C)			
WORKING TEMPERATURE	-22°F to 122°F / -30°C to 50°C			
WATERPROOF	IP67			
WEIGHT	42.3 oz			
ZEROING PROFILES	10			

DETAILED DIMENSIONS

L1	L2	L3	L4	L5	L6	D1	D2
14.7"	5.5"	5"	4.2"	1.9"	1.3"	1.75"	2.35"

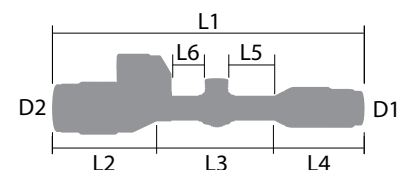

**SHARP, TIGHT
AND PRICED
JUST RIGHT!**