ATHLON

RIDICULOUSLY GOOD OPTICS

# CRONUS DCM PRO THERMAL

## 25-320 | 35-384 | 35L-640 | 50L-640

5 MOA & 5 MIL Interchangeable Reticles

**FIRST FOCAL PLANE**





**RETICLE MANUAL**


# CRONUS DCM PRO THERMAL SCOPE RETICLES

Cronus DCM PRO series thermal scopes allow the user to save 10 reticle profiles, choose from 10 different reticle types (5 in MOA and 5 in MIL), 6 different reticle colors (black, white, yellow, green, blue and red), and 10 reticle brightness levels. Users can access those settings through the scope main menu or Athlon Ballistics app.


When the scope is powered on, press and hold the menu button to open the menu, and to access the Reticle settings. More instructions of menu operation are located in the Quick User Guide or User Manual on the product web page.

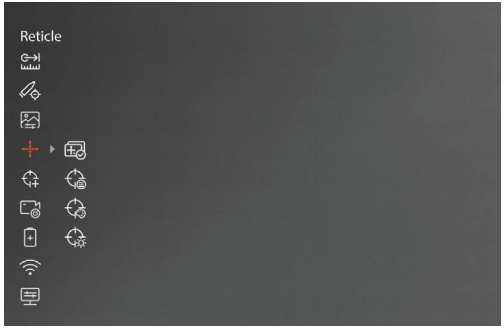



When the Athlon Ballistics app is connected to the scope, go to the general settings to access the reticle settings.

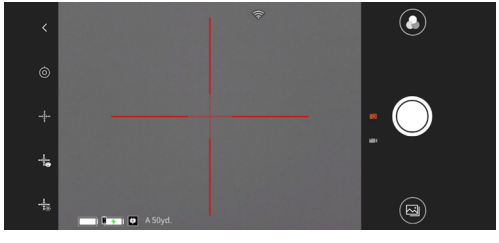


**Profile Configuration:** Letters A to J are assigned to 10 different profiles. The zeroing distance, zeroing location, reticle type, reticle color and reticle brightness are saved for each profile.

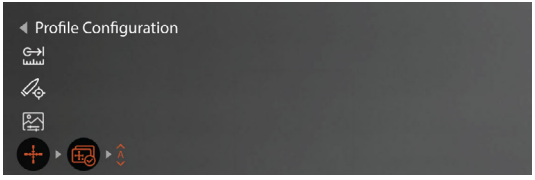


**Zero Setting:** 50, 100, and 200 Yard or Meter are available to choose from in the menu. Use the one shot zeroing feature in the menu to sight in. After zero is set, use the menu to select the preset zero distance under each profile. Please refer to Quick User Guide or User Manual on the product web page for detailed one shot zeroing instructions.

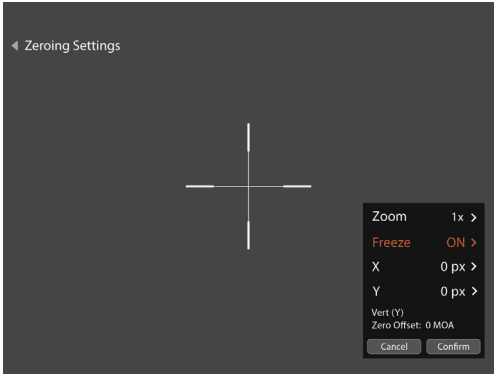





## #01 - MOA

1 - 20 MOA
2 - 68 MOA
3 - 4 MOA


thin line - 2 px
thick line - 6 px
dots - 4 px




## #02 - MOA


1 - 20 MOA
2 - 68 MOA

thin line - 2 px
thick line - 6 px



## #03 - MOA


20x20 px floating cross
4 px line thickness




## #04 - MOA

1 - 20 MOA
2 - 35 MOA
3 - 4 MOA


thin line - 2 px
thick line - 6 px
dots - 4 px




## #05 - MOA

1 - 20 MOA
2 - 35 MOA
3 - 5 MOA
4 - 4 MOA
5 - 7.3 MOA
6 - 10.4 MOA
7 - 14.6 MOA


thin line - 2 px
thick line - 6 px
dots - 4 px



## #01 - MIL

1 - 2 MIL
2 - 20 MIL
3 - 10 MIL


thin line - 2 px
thick line - 4 px
dots - 4 px



## #02 - MIL

1 - 5 MIL
2 - 20 MIL
3 - 1 MIL
4 - 2 MIL
5 - 2 MIL
6 - 1 MIL


thin line - 2 px
thick line - 6 px



## #03 - MIL

1 - 5 MIL
2 - 20 MIL
3 - 2.5 MIL
4 - 5 MIL
5 - 2 MIL
6 - 1 MIL


thin line - 2 px
thick line - 6 px



## #04 - MIL

1 - 2 MIL
2 - 20 MIL

thin line - 2 px
thick line - 6 px
dots - 6 px



## #05 - MIL

1 - 2 MIL
2 - 10 MIL
3 - 10 MIL

thin line - 2 px
thick line - 6 px
dots - 4 px

**SHARP, TIGHT AND PRICED JUST RIGHT!**

Toll free: 1-855-913-5678

contact@athlonoptics.com

10817 RENNER BLVD,
LENEXA, KS 66219

**ATHLONOPTICS.COM**