



2023 PRODUCT CATALOG

BINOCULARS
RIFLESCOPES
SPOTTING SCOPES
RANGEFINDERS
RED DOTS
ACCESSORIES

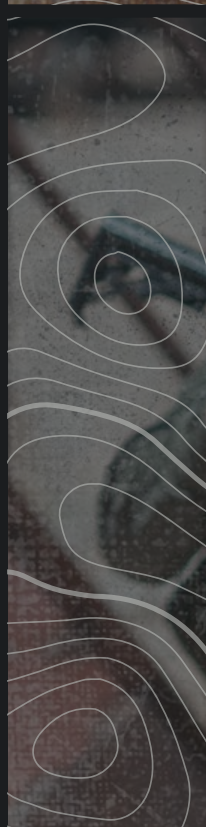

FREE SWAG

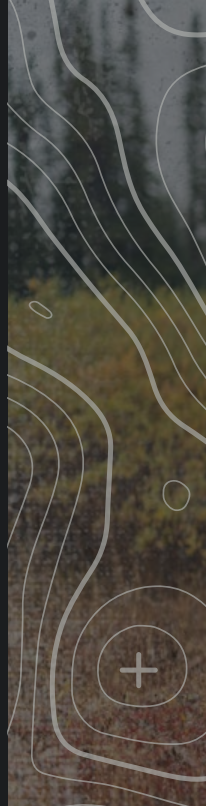

CONTENT

CONTENT

8 BINOCULARS

- 10 Cronus G2 UHD
- 10 10x42
- 10 15x56

- 12 Cronus UHD
- Rangefinding Binoculars
- 12 10x50

- 15 Midas G2 UHD
- 15 10x25
- 15 10x42, 8x42
- 15 12x50, 10x50

- 16 Argos G2 UHD / HD
- 16 10x42, 8x42
- 16 12x50, 10x50

- 19 Talos G2 UHD
- 19 10x42, 8x42

- 20 Neos G2 HD
- 20 10x42, 8x42

22 RIFLESCOPES

- 25 Cronus BTR GEN2 UHD
- 25 1-6x24 SFP
- 25 4.5-29x56 FFP

- 26 Ares ETR UHD
- 26 1-10x24 FFP
- 28 3-18x50 FFP
- 28 4.5-30x56 FFP

- 31 Ares BTR GEN2 HD
- 31 2.5-15x50 FFP
- 31 4.5-27x50 FFP

- 32 Midas TAC HD
- 32 4-16x44 FFP
- 32 5-25x56 FFP
- 32 6-24x50 FFP

- 35 Midas HMR HD
- 35 2.5-15x50 SFP

- 36 Midas BTR GEN2 HD
- 36 1-6x24 SFP
- 36 4.5-27x50 SFP

- 39 Helos BTR / GEN2
- 39 1-4.5x24 SFP
- 39 1-10x28 SFP
- 41 2-12x42 FFP
- 43 4-20x50 FFP
- 43 6-24x56 FFP

- 44 Heras SPR
- ★ 44 2-12x42 SFP
- ★ 44 4-20x50 SFP
- ★ 46 6-24x56 SFP
- ★ 46 6-24x56 FFP

- 49 Argos BTR GEN2
- 49 1-8x24 SFP
- 51 6-24x50 FFP
- 51 8-34x56 FFP
- 51 10-40x56 SFP

- 52 Argos HMR
- 52 2-12x42 SFP
- 52 4-20x50 SFP

- 55 Talos BTR GEN2
- ★ 55 1-4x24 SFP
- ★ 57 4-14x44 FFP

- 58 Talos
- ★ 58 1.5-5x32 SFP
- 60 3-12x40 SFP
- 60 4-16x40 SFP
- 60 6-24x50 SFP

- 63 Neos
- ★ 63 3-9x40 SFP
- 63 4-12x40 SFP
- 63 6-18x40 SFP

64 SPOTTING SCOPES

- 66 Cronus G2 UHD
- ★ 66 20-60x86 - 45 DEG

- 69 Ares G2 UHD
- 69 15-45x60 - 45 DEG / STR
- 69 22x Eyepiece
- 71 20-60x85 - 45 DEG / STR

- 72 Argos HD
- 72 20-60x85 - 45 DEG / STR

- 75 Talos
- 75 20-60x80 - 45 DEG

76 RED DOT SIGHTS

- 78 Pistol Open Sights
- 78 Midas TSR1
- ★ 78 Midas TSR1-M
- ★ 78 Midas EDC
- ★ 78 Talos EDC

- 81 Red Dots
- 81 Midas TSR2
- 81 Midas TSR3
- 81 Midas LE GEN2

- 82 Prism Scopes
- 82 Midas TSP1
- 82 Midas TSP3
- 82 Midas TSP4

- 85 Magnifiers
- 85 Midas M3
- 85 Midas M5

86 LASER RANGEFINDERS

- ★ 86 Midas G2 1 Mile
- ★ 89 Talos G2 850Y

90 RIFLESCOPES

- 90 Comparison Chart

94 RETICLE SUBTENSIONS

110 TRIPODS

113 ACCESSORIES

★ New Product

○ New Reticle

SFP - Second Focal Plane

FFP - First Focal Plane

athlonoptics.com



KEY PRODUCT FEATURES



EXTRA-LOW DISPERSION GLASS

Gives you an advantage with an image that has little or no chromatic fringe for the clearest and sharpest image.



HD GLASS

HD glass gives you better light transmission, and brighter and sharper images.



E2ES SYSTEM

A field flattening system that removes distortion on the outermost edge of the field of view.



ESP DIELECTRIC COATING

Reflects over 99% of the light to your eyes bringing you a clear, bright image and accurate color reproduction.



ADVANCED FMC

Advanced Fully Multi-Coated lenses provide better light transmission with optimum brightness and true color across the entire spectrum.



FULLY MULTI-COATED

Effectively reduces reflected light and increases the transmission of light giving you a brighter image than normal single coated lenses.




XPL COATING

Extra protection on the exterior lenses to prevent the scope from enduring dirt, oil, and potential scratches.



PHASE CORRECTED PRISMS

Special coating on prisms that produces images with better contrast, a higher resolution and better color reproduction.



BAK4 PRISMS

Produce a sharp, round exit pupil ultimately delivering higher light transmission and clarity to the edge of the image.



APOCHROMATIC LENS SYSTEM

Helps in converging refracting colors into one focus point, producing greater contrast, sharpness, and color definition.



PRECISION ZERO STOP SYSTEM

Allows you to return to your initial zero position with a sharp and precise stop, right on your initial zero.



LOCKING TURRETS

Allows you to pull up on your turret to dial and push down on the turret to lock it in place to avoid inadvertent adjustments.



ARGON PURGED

Argon gas has a low thermal conductivity compared to nitrogen gas, resulting in better fog proof capabilities.



NITROGEN PURGED

Nitrogen gas is used to purge air from the optic to help maintain internal fog-proof and waterproof capabilities.



EXTENDED BATTERY LIFE

Offers 50,000 hours battery life at medium illumination setting.



MOTION SENSOR

Built in motion detector automatically wakes the product up from the sleep mode when a motion is detected.



AUTO-BRIGHT TECHNOLOGY

Embedded light sensor adjusts the illumination setting automatically based on the ambient light.



SMART POWER MANAGEMENT

Smart Power Management System shuts the unit off when no adjustment is made in 6 hours. After a new battery is installed illumination is set at the last setting used.



WATERPROOF

Regardless of how heavy the rain is coming down or an accidental drop in the water, this sealed and gas-purged optic will remain waterproof.



RAINPROOF

Don't let unexpected showers stop you. While not submersible, rainproof optics will shed water in the harshest conditions.



RUBBER ARMOR

Provides additional protection and a durable, secure, non-slip soft texture grip for any weather condition.



NEW PRODUCTS FOR 2023

RIFLESCOPES



Heras SPR 2-12x42 **SFP**



Heras SPR 4-20x50 **SFP**



Heras SPR 6-24x56 **SFP / FFP**



Talos BTR GEN2 1-4x24 **SFP**



Talos BTR GEN2 4-14x44 **FFP**



Talos 1.5-5x32 **SFP**

SPOTTING SCOPE



Cronus G2 UHD 20-60x86 mm

OPEN SIGHTS



Midas TSR1-M



Midas EDC



Talos EDC

RANGEFINDERS



Talos G2 850Y



Midas G2 1 MILE

YOUR PRIZE IN OPTICS

ATHLON is a proud US sports optics product company devoted to designing and delivering superior quality optics, products, and outdoor accessories at a competitive price to our consumers via our distribution and retail channels. Athlon has strong engineering design capabilities, strategic alliances with quality manufacturers, and a streamlined fully integrated supply chain. These advantages enable us to bring the latest cutting edge technologies and cut out the extra layers of the traditional supply chain. With these advantages we are able to deliver goods and products to individual consumers' hands with great cost savings.

Our obsession with product quality and superior customer service for hunters, recreational shooters, and outdoor enthusiasts drives our business. The business model on which we founded Athlon allows us to deliver high quality optics at extremely competitive prices. Our goal from day one is to pass those savings to you, the outdoor enthusiast.

LIFETIME WARRANTY

Your Athlon product is warranted to be free of defects in materials and workmanship for the lifetime of the product, Athlon will also repair or replace the product at no charge to you if you damage it through normal use. No receipt needed, no registration required. Athlon Optics is committed to providing the best product you can buy for your money. This warranty does not cover damages caused by deliberate damage, misuse, theft, or maintenance provided by someone other than the Athlon Authorized Service Department.





BINOCULARS - OVERVIEW



CRONUS G2 UHD

MODEL	FOV @1000 YARDS	IDEAL APPLICATION
15x56 mm	235 ft	  
10x42 mm	338 ft	  



CRONUS UHD RANGEFINDING

10x50 mm 338 ft



MIDAS G2 UHD

12x50 mm	281 ft			
10x50 mm	341 ft			
10x42 mm	341 ft			
8x42 mm	426 ft			

**ARGOS G2 HD**

12x50 mm	257 ft		
10x50 mm	304 ft		
10x42 mm	319 ft		
8x42 mm	371 ft		

**ARGOS G2 UHD**

10x42 mm	319 ft			
8x42 mm	371 ft			



TALOS G2 HD

10x42 mm	319 ft		
8x42 mm	371 ft		



NEOS G2 HD

10x42 mm	309 ft		
8x42 mm	367 ft		





CRONUS G2 UHD

Designed for serious glassing with exceptional edge to edge clarity, sharp detail enhancement, ultra-clear brightness and true color representation. We designed these binoculars with our revolutionary E2ES lens system which gives you a flat field of view. We included UHD glass resulting in a clearer and sharper image. Dielectric coating reflects 99% of the light through the prism assembly. Our state of the art lightweight Magnesium chassis helps lighten your load all while maintaining ruggedness to withstand the scrapes & bumps of constant use. These Cronus binoculars can take a hit!



10 x 42 mm



15 x 56 mm

PRODUCT FEATURES



Phase Coated, BAK4 Prisms (42mm), Abbe Prisms (56mm), Advanced Fully Multi-Coated Lenses, Magnesium Chassis, Locking Diopter, Long Eye Relief, Close Focus, Twist Up Eye-Cups, Waterproof, Tripod Adaptable

PRODUCT SPECIFICATION

MODEL	OBJECTIVE LENS DIAMETER	EYE RELIEF	FOV ANGULAR	FOV @1000 YARDS	CLOSE FOCUS	INTERPUPILLARY DISTANCE	WEIGHT	HEIGHT X WIDTH
15x56 mm	56 mm	18.5 mm	4.5 °	235 ft	13.1 ft	59-74 mm	45.2 oz	8.7x6.2"
10x42 mm	42 mm	19.3 mm	6.5 °	338 ft	6.6 ft	56-73 mm	27.8 oz	6.3x5.1"



BEST USED FOR



VISIT THE PRODUCT PAGE





CRONUS UHD - RANGEFINDING

With ranging capabilities from 5 to 1000 yards on a deer and out to 2600 yards on a reflective target, these rangefinding binoculars are perfect for any hunting or long range situation. We designed these binoculars with our revolutionary E2ES lens system that gives you a flat field of view. We included UHD glass that results in clearer and sharper image as well as an illuminated ranging display.



10 x 50 mm



PRODUCT FEATURES



Magnesium chassis, Phase Coated, BAK4 Prisms, Advanced Fully Multi-Coated Lenses, Long Eye Relief, Close Focus, Argon Purged, Twist Up Eye-Cups, Waterproof, Dual Units of Measurement (Y/M), Angle Compensation Mode

PRODUCT SPECIFICATION

MODEL	OBJECTIVE LENS DIAMETER	EYE RELIEF	FOV ANGULAR	FOV @1000 YARDS	CLOSE FOCUS	INTERPUPILLARY DISTANCE	WEIGHT	HEIGHT X WIDTH
10x50 mm	50 mm	17.0 mm	6.2 °	338 ft	9.8 ft	58-76 mm	38.0 oz	6.7x5.4"

RANGEFINDING SPECIFICATION

RANGING REFLECTIVE	RANGING DEER	ACCURACY	POWER SUPPLY	DISPLAY
2600 Y	1000 Y	+ / -0.5 Y	CR2-3V	Red Illuminated OLED Display Screen



BEST
USED
FOR



VISIT THE
PRODUCT
PAGE





VISIT THE
PRODUCT
PAGE



BEST
USED
FOR



MIDAS G2 UHD



Midas was known to have a golden touch. He must have laid his hands on these binoculars since they set the gold standard for this class of binoculars. The rugged benchmark for all-weather brightness and clarity, these Midas roof-prism binoculars are light and slim thanks to the magnesium chassis. Together with UHD glass lenses, Advanced Fully Multi-Coated optics, high-quality BaK-4 prisms with our ESP Dielectric coating plus phase coating, these Midas binoculars gather maximum light and produce brilliant color fidelity.



10 x 25 mm



10 x 42 mm / 8 x 42 mm



12 x 50 mm / 10 x 50 mm

PRODUCT FEATURES



Phase Coated, Magnesium Chassis, BAK4 Prisms, Advanced Fully Multi-Coated Lenses, Long Eye Relief, Close Focus, Twist Up Eye-Cups, Waterproof, Tripod Adaptable

PRODUCT SPECIFICATION

MODEL	OBJECTIVE LENS DIAMETER	EYE RELIEF	FOV ANGULAR	FOV @1000 YARDS	CLOSE FOCUS	INTERPUPILLARY DISTANCE	WEIGHT	HEIGHT X WIDTH
12x50 mm	50 mm	15.0 mm	5.4 °	281 ft	11.5 ft	59-74 mm	32 oz	6.7x5.4"
10x50 mm	50 mm	16.9 mm	6.5 °	341 ft	9.8 ft	59-74 mm	32 oz	6.7x5.4"
10x42 mm	42 mm	15.2 mm	6.5 °	341 ft	8.2 ft	57-74 mm	23.3 oz	5.7x5.2"
8x42 mm	42 mm	17.2 mm	8.1 °	426 ft	6.5 ft	57-74 mm	23.3 oz	5.7x5.2"
10x25 mm	25 mm	15.5 mm	5.4 °	285 ft	5.2 ft	56-74 mm	8.3 oz	4.3x4.1"



ARGOS G2 UHD / HD

The Argos G2 line features affordable options with HD or UHD glass, both with Advanced Fully Multi-Coated Optics for sharp contrast, true color and excellent light transmission. They also have Bak-4 prism glass with ESP Dielectric coating and phase correction for enhanced color fidelity and sharpness. All Argos G2 binoculars are Argon gas purged for waterproofing & non-fogging capabilities. The durable and ergonomic magnesium chassis takes weight off your neck but at the same time stands up to the demands of hunting in any conditions.



10 x 42 mm / 8 x 42 mm (UHD)



10 x 42 mm / 8 x 42 mm (HD)



12 x 50 mm / 10 x 50 mm (HD)

PRODUCT FEATURES



BAK4 Prisms, Advanced Fully Multi-Coated Lenses, Long Eye Relief, Close Focus, Twist Up Eye-Cups, Waterproof, Tripod Adaptable

PRODUCT SPECIFICATION

MODEL	OBJECTIVE LENS DIAMETER	EYE RELIEF	FOV ANGULAR	FOV @1000 YARDS	CLOSE FOCUS	INTERPUPILLARY DISTANCE	WEIGHT	HEIGHT X WIDTH
HD 12x50 mm	50 mm	16.0 mm	4.9 °	257 ft	13 ft	56-76 mm	31.5 oz	6.8x5.6"
HD 10x50 mm	50 mm	17.0 mm	5.8 °	304 ft	13 ft	56-76 mm	31.5 oz	6.8x5.6"
HD 10x42 mm	42 mm	16.1 mm	6.1 °	319 ft	13 ft	56-76 mm	25.5 oz	5.7x5.3"
HD 8x42 mm	42 mm	17.3 mm	7.1 °	371 ft	13 ft	56-76 mm	25.5 oz	5.7x5.3"
UHD 10x42 mm	42 mm	16.1 mm	6.1 °	319 ft	13 ft	56-76 mm	25.5 oz	5.7x5.3"
UHD 8x42 mm	42 mm	17.3 mm	7.1 °	371 ft	13 ft	56-76 mm	25.5 oz	5.7x5.3"



BEST USED FOR



VISIT THE PRODUCT PAGE





VISIT THE
PRODUCT
PAGE



BEST
USED
FOR



TALOS G2 HD




Blaze your own trail with the Talos HD. Featuring a rugged and lightweight fully sealed and nitrogen purged composite chassis to brave the elements. Advanced Fully-Multicoated lenses paired with HD lenses provide optimum light transmission and true color representation unheard of at this price point. Low dispersion HD Glass significantly reduces chromatic aberration, delivering high clarity, contrast, and resolution. Next time a ridiculously big buck steps out of the shadows, catch him off guard and turn him into a wall hanger.



10 x 42 mm / 8 x 42 mm

PRODUCT FEATURES



Long Eye Relief, Close Focus, Twist Up Eye-Cups, Tripod Adaptable, Nitrogen Purged

PRODUCT SPECIFICATION

MODEL	OBJECTIVE LENS DIAMETER	EYE RELIEF	FOV ANGULAR	FOV @1000 YARDS	CLOSE FOCUS	INTERPUPILLARY DISTANCE	WEIGHT	HEIGHT X WIDTH
10x42 mm	42 mm	16.1 mm	6.1 °	319 ft	13.1 ft	56-76 mm	20.8 oz	5.7x5.0"
8x42 mm	42 mm	17.9 mm	7.1 °	371 ft	13.1 ft	56-76 mm	20.8 oz	5.7x5.0"



NEOS G2 HD

We build optics to withstand the elements, no matter what class of binos they are in. We figure if you spend any time outdoors you will be near water, and your equipment might spend some time in it. The Neos G2 series of weatherproof binoculars are built tough, with a composite chassis that's O-ring sealed and nitrogen purged for 100% waterproof/fog-proofing. So, if you run into foul weather or take a spill in a mountain stream, your Neos G2 binos are ready for it. Rubber armor gives you a grip in slippery situations. Fully Multi-coated optics and premium-quality BaK-4 prism glass maximize light transmission and image clarity.



10 x 42 mm / 8 x 42 mm

PRODUCT FEATURES



Long Eye Relief, Close Focus, Twist Up Eye-Cups, Tripod Adaptable, Nitrogen Purged

PRODUCT SPECIFICATION

MODEL	OBJECTIVE LENS DIAMETER	EYE RELIEF	FOV ANGULAR	FOV @1000 YARDS	CLOSE FOCUS	INTERPUPILLARY DISTANCE	WEIGHT	HEIGHT X WIDTH
10x42 mm	42 mm	14.1 mm	5.9 °	309 ft	13.1 ft	56-72 mm	21 oz	5.9x4.9"
8x42 mm	42 mm	17 mm	7.0 °	367 ft	13.1 ft	56-72 mm	21 oz	5.9x4.9"



BEST USED FOR

HUNTING

GENERAL NATURE VIEWING

VISIT THE PRODUCT PAGE



RIFLESCOPES - OVERVIEW



CRONUS BTR GEN2 UHD



POWER X OBJ. LENS	AVAILABLE RETICLES	IDEAL APPLICATION
1-6x24 SFP	ATSR2 SFP IR MOA	
4.5-29x56 FFP	APLR5 FFP IR MOA	
	APRS6 FFP IR MIL	
	APRS1 FFP IR MIL	

ARES ETR UHD



2.5-15x50 FFP	APLR4 FFP IR MOA	
	APRS5 FFP IR MIL	
4.5-27x50 FFP	APLR4 FFP IR MOA	
	APRS5 FFP IR MIL	

MIDAS BTR GEN2



1-6x24 SFP	ATSR16 SFP IR MOA	
	ATSR4 SFP IR MOA	
4.5-27x50 SFP	AHMR SFP IR MOA	
	APRS4 SFP IR MIL	

ARES ETR UHD



1-10x24 FFP	ATMR2 FFP IR MOA	
	ATMR3 FFP IR MIL	
3-18x50 FFP	APLR6 FFP IR MOA	
	APRS6 FFP IR MIL	
4.5-30x56 FFP	APLR2 FFP IR MOA	
	APLR5 FFP IR MOA	
	APRS1 FFP IR MIL	
	APRS6 FFP IR MIL	

MIDAS TAC HD



4-14x44 FFP	APRS2 FFP MIL	
5-25x56 FFP	APLR4 FFP MOA	
	APRS3 FFP MIL	
	APRS6 FFP MIL	
6-24x50 FFP	APLR4 FFP MOA	
	APRS2 FFP MIL	
	APRS3 FFP MIL	

MIDAS HMR HD



2.5-15x50 SFP	AHMR SFP IR MOA	
	BDC 600A	

HELOS BTR / GEN2



1-4.5x24 SFP	ATSR3 SFP IR MOA	
1-10x28 SFP	ATMR4 SFP IR MOA	
2-12x42 FFP	AHMR2 FFP IR MOA	
	AHMR2 FFP IR MIL	
4-20x50 FFP	APLR6 FFP IR MOA	
	APRS7 FFP IR MIL	
6-24x56 FFP	APLR6 FFP IR MOA	
	APRS6 FFP IR MIL	

HERAS SPR



2-12x42 SFP	AAGR1 SFP MOA	
	AAGR1 SFP MIL	
4-20x50 SFP	AAGR2 SFP MOA	
	AAGR2 SFP MIL	
6-24x56 SFP	APLR7 SFP IR MOA	
	APRS7 SFP IR MIL	
	APRS8 SFP IR MIL	
6-24x56 FFP	APLR9 FFP IR MOA	
	APRS9 FFP IR MIL	

ARGOS BTR GEN2



1-8x24 SFP	ATSR5 SFP IR MOA	
6-24x50 FFP	APLR2 FFP IR MOA	
	APMR FFP IR MIL	
8-34x56 FFP	APLR2 FFP IR MOA	
	APMR FFP IR MIL	
10-40x56 SFP	BLR SFP MOA	

ARGOS HMR



2-12x42 SFP	BDC 600	
	BDC 600A	
	AHMC SFP MOA	
4-20x50 SFP	BDC 600A	
	AHMC SFP MOA	
	MIL-DOT	

TALOS BTR GEN2



1-4x24 SFP	ATMR6 SFP IR MOA	
	AHSR14 SFP IR MIL	
	ATMR7 SFP IR MIL	
4-14x44 FFP	APLR10 FFP IR MOA	
	APLR2 FFP IR MIL	
	APRS10 FFP IR MIL	

TALOS



3-12x40 SFP	BDC 600 IR	
	CENTER X	
	MIL-DOT	
4-16x40 SFP	BDC 600 IR	
	MIL-DOT	
6-24x50 SFP	BDC 600 IR	
	ATMR1 SFP IR MIL	

NEOS



3-9x40 SFP	CENTER X	
	BDC 500 IR	
	BD C22 RIMFIRE	
	BDC 250 MUZZLELOADER IR	
4-12x40 SFP	CENTER X	
	BDC 500 IR	
	BDC 22 RIMFIRE	
6-18x44 SFP	CENTER X	
	BDC 500 IR	



CRONUS BTR GEN2 UHD / HD

A titan in long range precision. Poor weather and low light conditions are no match for UHD extra-low dispersion lenses. Cut through mirage and leave the competition in the dust. From precision shooting to the most demanding hunt, the Cronus BTR GEN2 is up to the challenge. The next generation of the Cronus BTR is now equipped with our applauded internal stainless-steel component turret design producing sharp, loud, tactile clicks.



1-6x24 SFP



4.5-29x56 FFP

PRODUCT FEATURES

* only 4.5-29x56 | ** only 1-6x24




Argon Purged, High Precision Erector System, Aircraft Grade Aluminum Tube, Side Parallax Adjustment (4.5-29), Illuminated Reticles, Etched Glass Reticles, Exposed Turrets, Waterproof

PRODUCT SPECIFICATION


POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YDS	WEIGHT	LENGTH
1-6x24 SFP	Exposed & Locking	30 mm	ATSR2 SFP IR MOA	Matte	3.6-4.0"	106.9-17.7 ft	18.8 oz	10.4"
4.5-29x56 FFP	Exposed	34 mm	APLR5 FFP IR MOA APRS6 FFP IR MIL APRS1 FFP IR MIL	Matte	3.6-3.8"	24.8-3.8 ft	35.8 oz	14.4"




ATSR2 SFP IR MOA

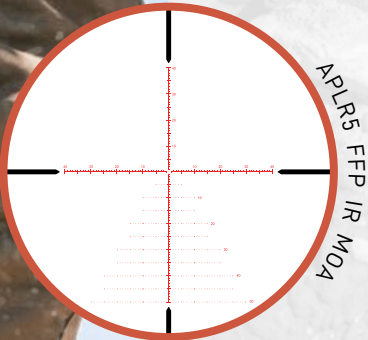

APLR5 FFP IR MOA

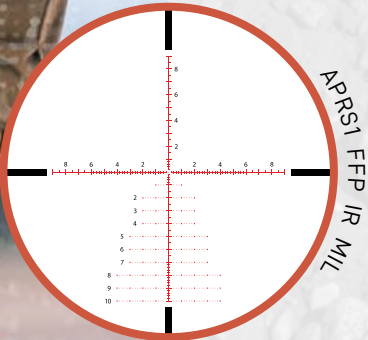

APRS1 FFP IR MIL

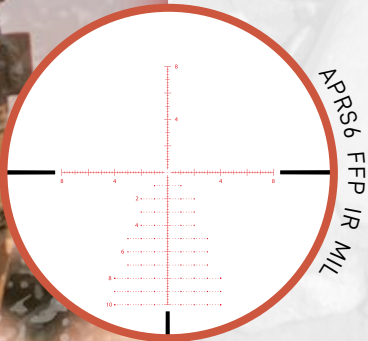

APRS6 FFP IR MIL

VISIT THE
PRODUCT
PAGE



BEST
USED
FOR





ARES ETR UHD

The latest in our growing line of Low-Power Variable Optics, this First Focal Plane LPVO is unmatched in versatility and quality. Whether hunting in thick brush, taking 600-yard shots over a bean field, or tearing up a 3-gun stage, the incredible field of view on 1x paired with the long-range capability of 10x is ready for any task. Take confidence with a precision zero stop and locking elevation turret/capped windage turret, ensuring you never lose zero.



1-10x24 FFP

PRODUCT FEATURES

** Zero Stop and Locking - Elevation Turret





High Precision Erector System, Aircraft Grade Aluminum Tube, XPL Coating, Illuminated Reticles, Etched Glass Reticles, Exposed/Capped Turrets, Waterproof

PRODUCT SPECIFICATION

* Exposed - Elevation Turret / Capped - Windage Turret

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YDS	WEIGHT	LENGTH
1-10x24 FFP	*Exposed/ Capped	34 mm	ATMR2 FFP IR MOA ATMR3 FFP IR MIL	Matte	3.7"	117.3-11.7 ft	26.9 oz	10.0"

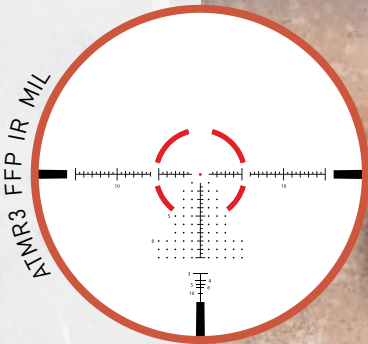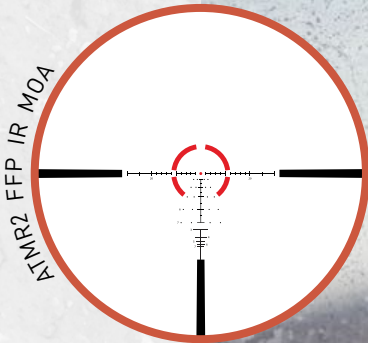

1X - ATMR3 FFP IR MIL



10X - ATMR3 FFP IR MIL

BEST
USED
FOR



VISIT THE
PRODUCT
PAGE





ARES ETR UHD

The Ares ETR First Focal Plane scope is loaded with features that will allow you to take your long range shooting to another level. Featuring a stainless steel turret system, the Ares ETR has the most tactile clicks and a true zero stop on the elevation turret to make sure your turrets and shots are right on every time. A locking feature is equipped on windage turret. Extra Low dispersion lenses allow for the sharpest and best color image possible. Constructed with an 34mm tube, this riflescope can withstand even the harshest of elements.



PRODUCT FEATURES


* Locking Feature on Windage only



High Precision Erector System, Aircraft Grade Aluminum Tube, Side Parallax Adjustment, XPL Coating, Illuminated Reticles, Etched Glass Reticles, Exposed Turrets, Waterproof

PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YDS	WEIGHT	LENGTH
3-18x50 FFP	Exposed & Locking	34 mm	APLR6 FFP IR MOA	Matte	3.74"	39.2-6.65 ft	31.4 oz	14.2"
			APRS6 FFP IR MIL					
4.5-30x56 FFP	Exposed & Locking	34 mm	APLR2 FFP IR MOA	Matte/ *Brown	3.9"	24.5-3.75 ft	36.5 oz	15.3"
			APLR5 FFP IR MOA					
			APRS1 FFP IR MIL					
			APRS6 FFP IR MIL					


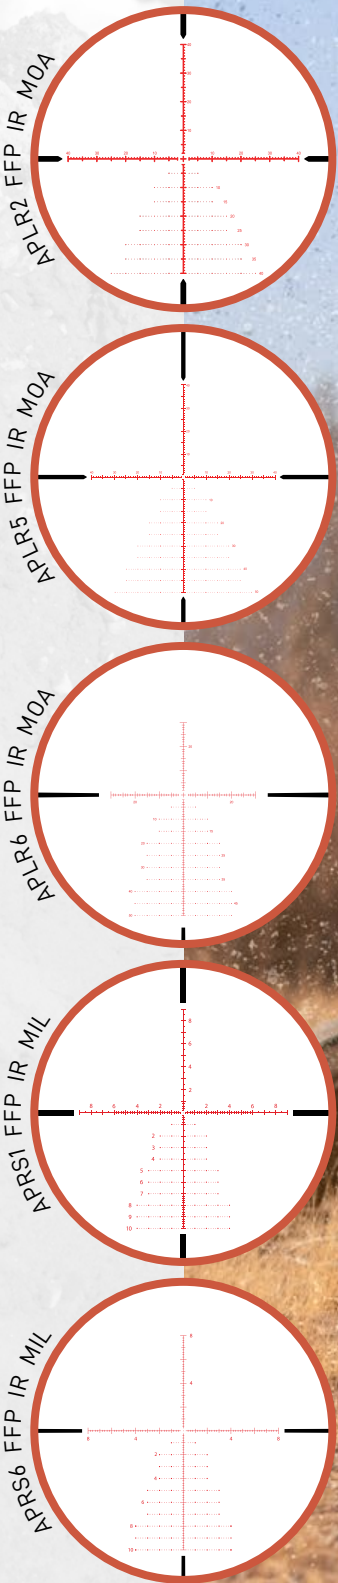


BEST
USED
FOR

LONG RANGE

HUNTING

VISIT THE
PRODUCT
PAGE

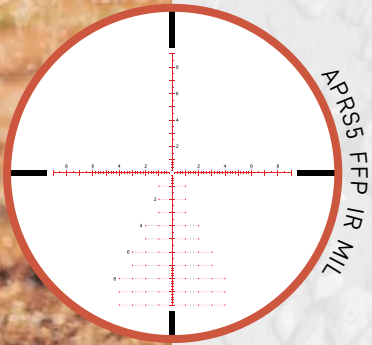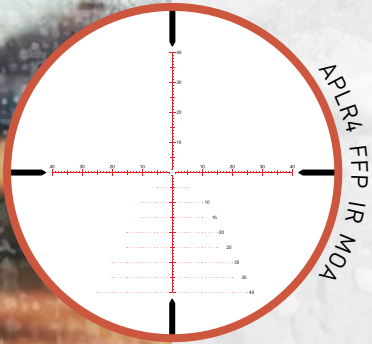

ARES BTR GEN2 HD



Built off the success of the 1st generation Ares BTR, the GEN2 is still a top-tier riflescope, without the price tag. The Ares BTR GEN2 acquires a new stainless steel turret design, just like the Midas TAC and Ares ETR lines. The new turret design features sharper, more tactile clicks. Featuring HD glass, a new optical system provides an even brighter and clearer image throughout the magnification range. A one-piece, precision machined aircraft grade aluminum scope body, precision zero stop, and impeccable tracking will deliver precise, accurate results in any field.



2.5-15x50 FFP



4.5-27x50 FFP

PRODUCT FEATURES



High Precision Erector System, Aircraft Grade Aluminum Tube, Side Parallax Adjustment, Illuminated Reticles, Etched Glass Reticles Exposed Turrets, Waterproof

PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YDS	WEIGHT	LENGTH
2.5-15x50 FFP	Exposed	30 mm	APLR4 FFP IR MOA APRS5 FFP IR MIL	Matte	3.9"	41.8-6.8 ft	27.3 oz	13.8"
4.5-27x50 FFP	Exposed	30 mm	APLR4 FFP IR MOA APRS5 FFP IR MIL	Matte	3.9"	22.7-3.8 ft	27.3 oz	13.8"

VISIT THE
PRODUCT
PAGE



BEST
USED
FOR





MIDAS TAC HD

Here at Athlon Optics we have listened to your feedback and suggestions and developed the Midas TAC. Loaded with features including HD Glass, Advanced Fully Multi-Coated lenses to enhance target appearance at all distances, a hard Zero Stop for repeatability and Capped Windage Turret to prevent accidental adjustments. This is not just another option, but the solution!



4-16x44 FFP



5-25x56 FFP



6-24x50 FFP

PRODUCT FEATURES





High Precision Erector System, Aircraft Grade Aluminum, Side Parallax Adjustment, Non-Illuminated Reticles, Etched Glass Reticles, Waterproof

PRODUCT SPECIFICATION

* Exposed - Elevation Turret / Capped - Windage Turret

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YDS	WEIGHT	LENGTH
4-16x44 FFP	*Exposed/ Capped	30 mm	APRS2 FFP MIL	Matte	3.7"	27.7-7 ft	23.8 oz	14.2"
5-25x56 FFP	*Exposed/ Capped	34 mm	APLR4 FFP MOA	Matte	3.7"	22.1-4.5 ft	30.0 oz	15.1"
			APRS3 FFP MIL					
			APRS6 FFP MIL					
6-24x50 FFP	*Exposed/ Capped	30 mm	APLR4 FFP MOA	Matte	3.7"	17.8-4.6 ft	26.3 oz	14.6"
			APRS2 FFP MIL					
			APRS3 FFP MIL					

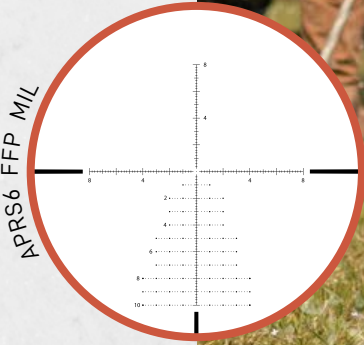
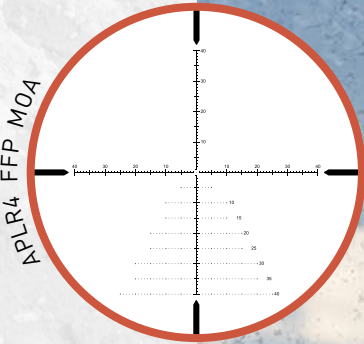


BEST
USED
FOR

LONG RANGE

HUNTING

VISIT THE
PRODUCT
PAGE

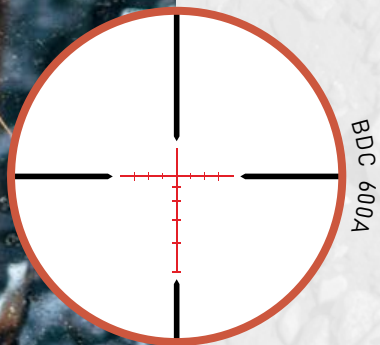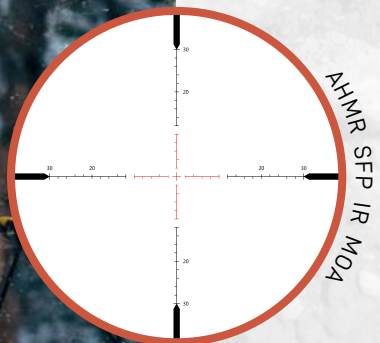

MIDAS HMR HD

Attention all hunters, attention all hunters! We have great news for you! We would like to introduce the Midas HMR Second Focal Plane riflescope line made by hunters, for hunters.

Featuring HD glass and Advanced Fully Multi-Coated optics, the Midas HMR delivers crisp bright images for taking a shot, short or long. This one piece tube, precision-machined from aircraft grade aluminum will deliver precise, accurate results all day long. Both elevation and windage turrets are capped to make sure nothing gets bumped after you set your zero. You can always count on it to deliver the final punch.



2.5-15x50 SFP



PRODUCT FEATURES



High Precision Erector System, Aircraft Grade Aluminum Tube, Side Parallax Adjustment, Illuminated Reticles, Etched Glass Reticles

PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YDS	WEIGHT	LENGTH
2.5-15x50 SFP	Capped	30 mm	AHMR SFP IR MOA BDC 600A	Matte	3.9"	41.8-6.8 ft	26 oz	13.8"

VISIT THE
PRODUCT
PAGE



BEST
USED
FOR





MIDAS BTR GEN2 HD

This second focal plane variable power scope will be the perfect optic for you regardless of whether or not you are shooting small targets at a few hundred yards, shooting 3-gun matches, or hunting big game anywhere in the world, this will be the perfect option for you.

With new and improved tactile turrets, a true zero stop, and updated reticle designs; you won't find a better option on the market for any of your applications. HD glass equipped with our Advanced Fully Multi-Coated lenses so you'll have the brightest, clearest image possible in any situation. The innovative XPL coating protects your lenses from oil, dirt and smudges.



1-6x24 SFP



4.5-27x50 SFP




PRODUCT FEATURES



High Precision Erector System, Aircraft Grade Aluminum Tube, Side Parallax Adjustment, Illuminated Reticles, Etched Glass Reticles, Capped/Exposed Turrets, Waterproof


PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YDS	WEIGHT	LENGTH
1-6x24 SFP	Capped	30 mm	ATSR16 SFP IR MOA ATSR4 SFP IR MOA	Matte	3.8"	108-17.6 ft	18.1 oz	10.6"
4.5-27x50 SFP	Exposed	30 mm	AHMR SFP IR MOA APRS4 SFP IR MIL	Matte	3.9"	22.7-3.6 ft	26.0 oz	13.8"

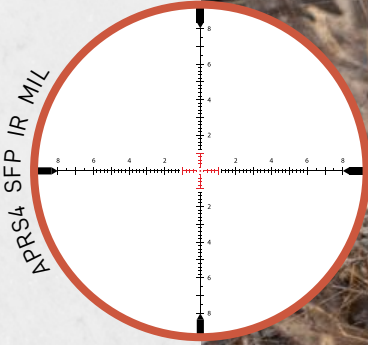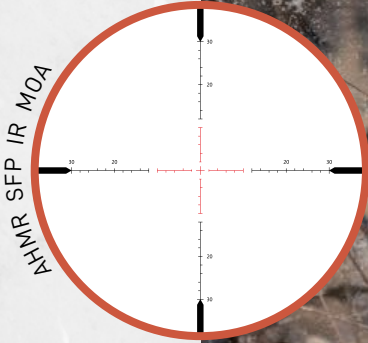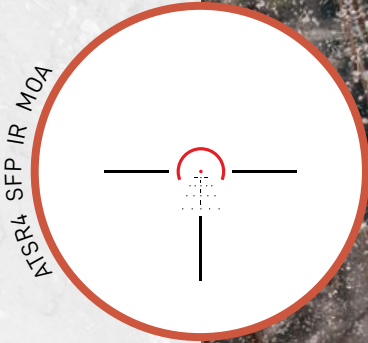

BEST USED FOR

VISIT THE PRODUCT PAGE

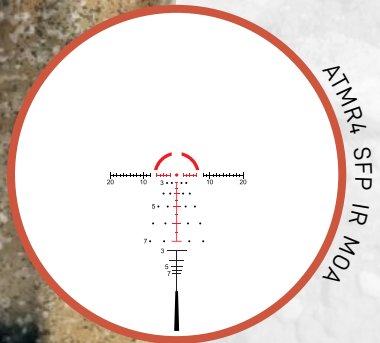

ATMR4 SFP IR MOA



ATSR3 SFP IR MOA

HELOS BTR / GEN2



The Helos BTR GEN2 1-10x28 is a second focal plane option for tactical shooters looking for the latest trend in optics at an affordable price. Accurately assess and engage silhouette-sized targets out to 700 yards using 68 or 69 gr .223/5.56 Nato cartridges with the ATMR4 SFP IR MOA reticle.

The Helos BTR 1-4.5x24 is specially designed for service rifle matches and AR platforms with short and mid-range applications in mind. A revolution locking feature limits the Up Adjustment of your elevation turret within one revolution from your zero position, while still providing 23 MOA adjustment from zero, ideal for 600 yard targets. This feature eliminates any second-guessing which turn you are at on your elevation turret.



1-10x28 GEN2 SFP



1-4.5x24 SFP

1-10x28 PRODUCT FEATURES

High Precision Erector System, Aircraft Grade Aluminum Tube, Illuminated, Reticle, Etched Glass Reticle, Capped Turrets



1-4.5x24 PRODUCT FEATURES

Revolution Lock, High Precision Erector System, Aircraft Grade Aluminum Tube, Illuminated Reticle, Etched Glass Reticle, Exposed Turrets, Side Parallax Adjustment

PRODUCT SPECIFICATION								
POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YDS	WEIGHT	LENGTH
1-10x28 SFP	Capped	34 mm	ATMR4 SFP IR MOA	Matte	3.2"	110-10 ft	18.3 oz	10.3"
1-4.5x24 SFP	Exposed	30 mm	ATSR3 SFP IR MOA	Matte	3.2"	100-22 ft	22.9 oz	9.5"

VISIT THE PRODUCT PAGE

BEST USED FOR

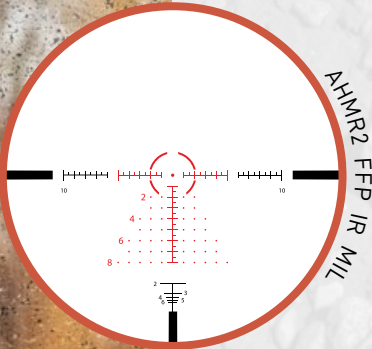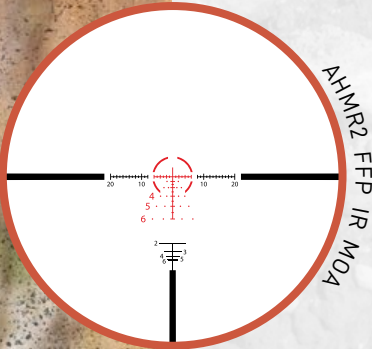

HELOS BTR GEN2



RIFLESCOPES | HELOS BTR GEN2

All the attributes of an ideal designated marksman rifle scope, with features equally suitable for the modern hunter or an operators' DMR. Ideal for anyone looking for a solution to short range and mid-range applications, whether you dial or holdover. First Focal Plane MOA and MIL based reticles are always valid at any magnification. Robustly built with fool-proof turret features and a protective XPL lens coating, the Helos BTR GEN2 2-12x42 is ready to deploy in any field.



2-12x42 FFP



PRODUCT FEATURES



* Locking Feature on Elevation only

High Precision Erector System, Aircraft Grade Aluminum Tube, Side Parallax Adjustment, Illuminated Reticles, Etched Glass Reticles, Exposed Turrets, Waterproof

PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YDS	WEIGHT	LENGTH
2-12x42 FFP	Exposed & Locking	30 mm	AHMR2 FFP IR MOA AHMR2 FFP IR MIL	Matte	3.6"	55.7-9.6 ft	25.4 oz	11.8"

VISIT THE
PRODUCT
PAGE



BEST
USED
FOR



athlonoptics.com



HELOS BTR GEN2

Affordable, solid, and reliable are seldom associated with long range shooting and hunting. The Helos BTR GEN2 is the exception. Advanced Fully Multi-Coated lenses and XPL coatings balance out this optic for a wide variety of conditions. Cross-over features such as Locking turrets are not just for hunting, they instill confidence in mid to long range shooters as well.



4-20x50 FFP



6-24x56 FFP

PRODUCT FEATURES

* Locking Feature on Elevation only



High Precision Erector System, Aircraft Grade Aluminum Tube, Side Parallax Adjustment, Illuminated Reticles, Etched Glass Reticles, Exposed Turrets, Waterproof

PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YDS	WEIGHT	LENGTH
4-20x50 FFP	Exposed & Locking	30 mm	APLR6 FFP IR MOA	Matte	3.6"	27.9-5.6 ft	27.6 oz	13.3"
			APRS6 FFP IR MIL					
6-24x56 FFP	Exposed & Locking	34 mm	APLR6 FFP IR MOA	Matte	3.7"	19.9-5.12 ft	34.5 oz	14.3"
			APRS6 FFP IR MIL					



VISIT THE
PRODUCT
PAGE



BEST
USED
FOR





HERAS SPR

Athlon's modern update to the classic 3-9x40 hunting scope. Incorporating an adjustable elevation turret, locking windage turret, and MOA and MIL second focal plane reticle options provide modern hunters with a new approach for shots on long-range game. Featuring a parallax adjustment from infinity to a minimum distance of 10 yards, suitable for use on long-range magnum rifles and close-range airguns alike!



2-12x42 SFP - NEW



4-20x50 SFP - NEW

PRODUCT FEATURES

* Locking Feature on Windage only






High Precision Erector System, Aircraft Grade Aluminum, Side Parallax Adjustment, Non-Illuminated Reticles, Etched Glass Reticles, Exposed Turrets, Waterproof

PRODUCT SPECIFICATION

* Exposed - Elevation Turret / Capped - Windage Turret

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YDS	WEIGHT	LENGTH
2-12x42 SFP	Exposed	1"	AAGR1 SFP MOA	Matte	3.6"	55.7-9.6 ft	23.5 oz	11.8"
			AAGR1 SFP MIL					
4-20x50 SFP	Exposed	1"	AAGR2 SFP MOA	Matte	3.6"	27.9-5.6 ft	25.0 oz	13.3"
			AAGR2 SFP MIL					

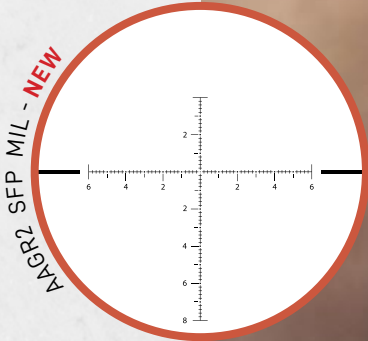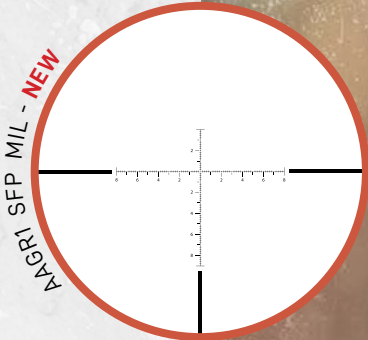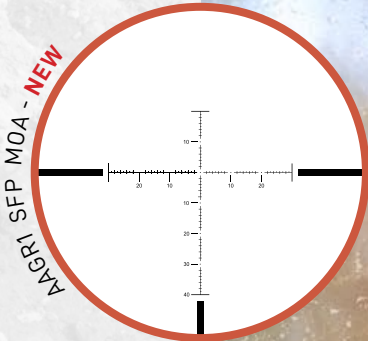

BEST
USED
FOR

VISIT THE
PRODUCT
PAGE





HERAS SPR

Push your small caliber firearm or airgun to new distances with a wide high magnification range of 6-24X. Incorporating an adjustable elevation turret, locking windage turret, and MOA and MIL reticle options provide modern hunters with a new approach for shots on long-range game. While still featuring a minimum parallax of 10 yards out to infinity, the 6-24X is the only magnification range in the Hera's SPR line to feature both SFP and FFP options.



6-24x56 SFP / FFP - NEW



PRODUCT FEATURES

* Locking Feature on Windage only






High Precision Erector System, Aircraft Grade Aluminum, Side Parallax Adjustment, Non-Illuminated Reticles, Etched Glass Reticles, Exposed Turrets, Waterproof

PRODUCT SPECIFICATION

* Exposed - Elevation Turret / Capped - Windage Turret

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YDS	WEIGHT	LENGTH
6-24x56 SFP	Exposed	30 mm	APLR7 SFP IR MOA	Matte	3.7"	19.9-5.1 ft	32.3 oz	14.4"
			APRS7 SFP IR MIL					
			APRS8 SFP IR MIL					
6-24x56 FFP	Exposed	30 mm	APLR9 FFP IR MOA	Matte	3.7"	19.9-5.1 ft	32.3 oz	14.4"
			APRS9 FFP IR MIL					



BEST
USED
FOR



VISIT THE
PRODUCT
PAGE





ARGOS BTR GEN2



The Argos BTR GEN2 1-8x24 is a very versatile tool for multigunners, hunters, and those in the market for a self defense optic. Whether you are expecting close engagement with wild hogs, or burning up ammo at the local range, a reliable close-range scope with the ability to engage targets mid-range is something no one should be without. The ATSR5 reticle provides quick target acquisition at close range and holdovers out to 600 yards using 68 and 69 grain BTHP 223 Rem/5.56mm NATO rounds.



1-8x24 SFP



PRODUCT FEATURES



High Precision Erector System, Aircraft Grade Aluminum Tube, Illuminated Reticle, Etched Glass Reticle

PRODUCT SPECIFICATION


POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YDS	WEIGHT	LENGTH
1-8x24 SFP	Capped	30 mm	ATSR5 SFP IR MOA	Matte	3.5"	110-14.5 ft	16.1 oz	9.8"

VISIT THE
PRODUCT
PAGE




BEST
USED
FOR




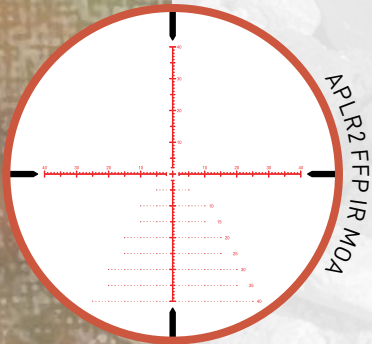

APLR2 FFP IR MOA

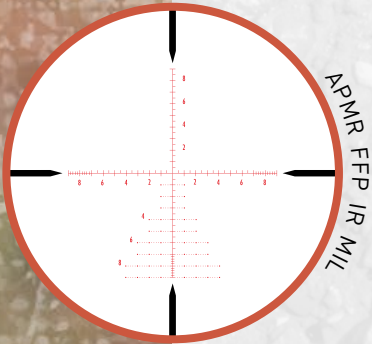

APMR FFP IR MIL

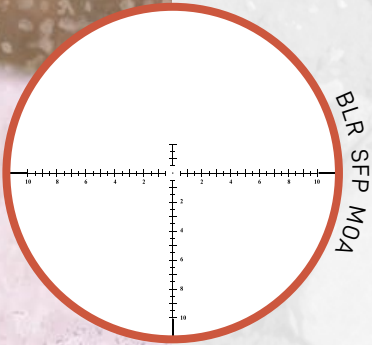

BLR SFP MOA

ARGOS BTR GEN2



A precision long range optic with features normally found on high-end riflescopes. The Argos BTR GEN2 is designed for precision shooting on a budget. Advanced Fully Multi-Coated Optics deliver a clear bright image in low-light environments. The GEN2 now features Athlon's Precision Zero Stop System, for a quick-hard stop when returning to zero. It also features turrets with sharper, more tactile clicks.



6-24x50 FFP



8-34x56 FFP



10-40x56 SFP

PRODUCT FEATURES



High Precision Erector System , Aircraft Grade Aluminum Tube , Side Parallax Adjustment, Illuminated Reticles, Etched Glass Reticles, Waterproof

PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YDS	WEIGHT	LENGTH
6-24x50 FFP	Exposed	30 mm	APLR2 FFP IR MOA	Matte	3.3"	16.7-4.5 ft	30.3 oz	14.1"
			APMR FFP IR MIL					
8-34x56 FFP	Exposed	30 mm	APLR2 FFP IR MOA	Matte	3.3"	12.5-3 ft	32.0 oz	15.5"
			APMR FFP IR MIL					
10-40x56 SFP	Exposed	30 mm	BLR SFP MOA	Matte	3"	12.6-3.1 ft	31.8 oz	16.3"

VISIT THE
PRODUCT
PAGE



BEST
USED
FOR





ARGOS HMR

The Argos HMR is designed from the ground up with the average outdoorsman in mind. This compact and durable hunting scope is a feature-rich, yet affordable option. 5x and 6x magnification ratios are ideally suited for a wide variety of close- and long-range hunting. Advanced Fully Multi-Coated lenses paired with clean and concise reticles like an illuminated center-dot crosshair, Mil-Dot, or BDC reticle options for a fool-proof traditional setup.



2-12x42 SFP



4-20x50 SFP





PRODUCT FEATURES



Aircraft Grade Aluminum
Tube, Illuminated Reticles,
Etched Glass Reticles

PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YDS	WEIGHT	LENGTH
2-12x42 SFP	Capped	1"	BDC 600	Matte	3.6"	55.7-9.6 ft	19.8 oz	11.8"
			BDC 600A					
			AHMC SFP MOA					
4-20x50 SFP	Capped	1"	BDC 600A	Matte	3.6"	27.9-5.6 ft	21.0 oz	13.2"
			AHMC SFP MOA					
			MIL-DOT					

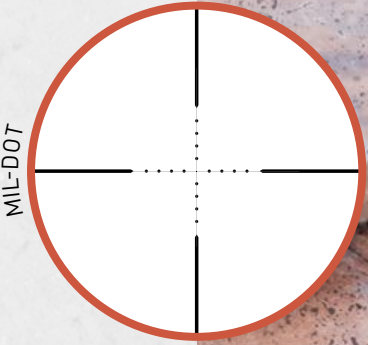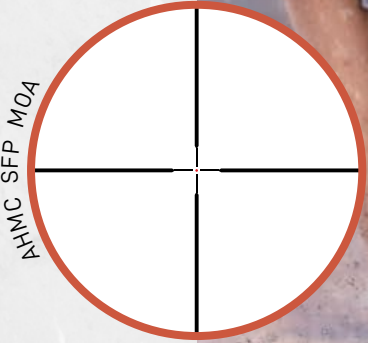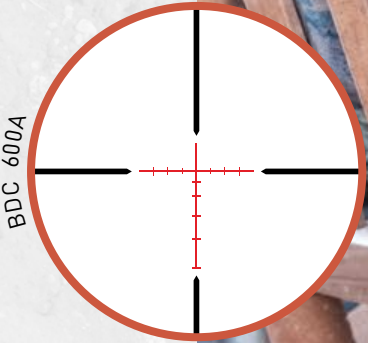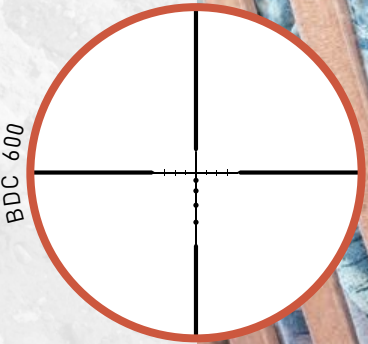

BEST
USED
FOR



VISIT THE
PRODUCT
PAGE





TALOS BTR GEN2

An affordable entry into the world of Low Power Variable Optics. The Talos BTR GEN2 1-4x24 is as suitable for any AR-15 as it is for a short-range bolt action hunting rifle. On it's lowest magnification setting you can expect extremely fast target acquisition, with enough magnification to engage mid-range distances. Rugged and ready, capped turrets and illuminated reticles add to the dependability and versatility of this optic.



1-4x24 SFP - NEW



PRODUCT FEATURES




Aircraft Grade Aluminum, Illuminated Reticles, Etched Glass Reticles

PRODUCT SPECIFICATION


POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RE- LIEF	FOV @100 YDS	WEIGHT	LENGTH
1-4x24 SFP	Capped	30 mm	ATMR6 SFP IR MOA	Matte	4.5-3.5"	110-26 ft	16.8 oz	9.4"
			AHSR14 SFP IR MIL					
			ATMR7 SFP IR MIL					



ATMR6 SFP IR MOA - NEW

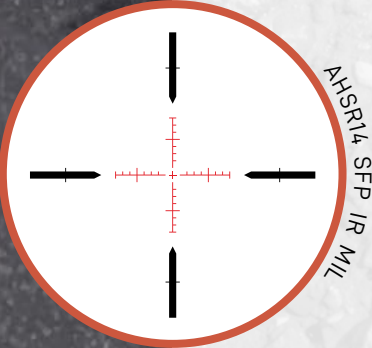

AHSR14 SFP IR MIL

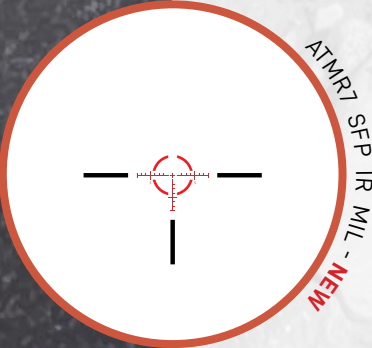

ATMR7 SFP IR MIL - NEW



VISIT THE
PRODUCT
PAGE

BEST
USED
FOR





TALOS BTR GEN2

It was hard to imagine a first focal plane rifle scope at under \$400, but the first generation Talos BTR proved it could be done. The Talos BTR GEN2 builds on that reputation with improved turrets and the addition of a true precision zero stop. All while maintaining repeatable tracking and the affordable price! Fully Multi-Coated lenses and illuminated etched reticles enable the Talos BTR GEN2 to perform in a wide range of conditions.



4-14x44 FFP - NEW






PRODUCT FEATURES



Aircraft Grade Aluminum, Side Parallax Adjustment, Illuminated Reticles, Etched Glass Reticles

PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RE- LIEF	FOV @100 YDS	WEIGHT	LENGTH
4-14x44 FFP	Exposed	30 mm	APLR10 FFP IR MOA	Matte	3.23-3.15"	27.2-7.9 ft	25.9 oz	12.9"
			APLR2 FFP IR MIL					
			APRS10 FFP IR MIL					

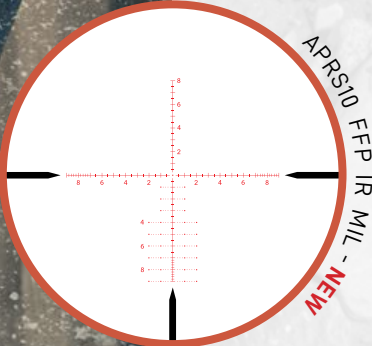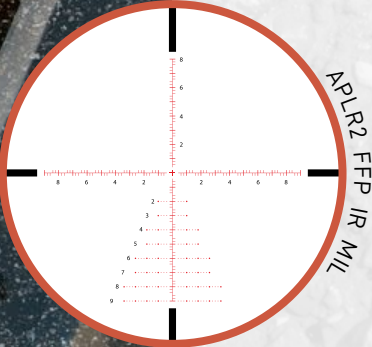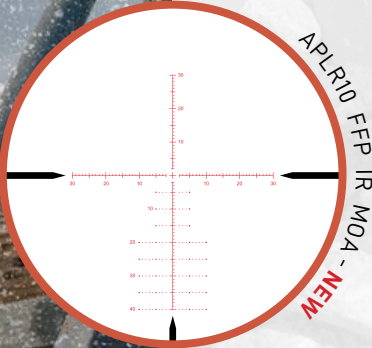

VISIT THE
PRODUCT
PAGE



BEST
USED
FOR





TALOS


A crossbow scope with low-light performance, repeatable adjustments, and dependability to perform for seasons to come! The Talos Crossbow scope's reticle makes it easy to match your holdovers to even the fastest crossbows on the market. Your next buck isn't safe out to 100 yards with the CB100 reticles accurate holds from 20-100 yards.



1.5-5x32 SFP - NEW



CB100 SFP IR MOA - NEW

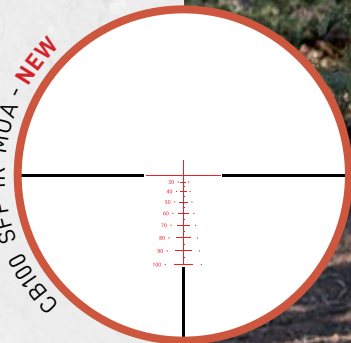

PRODUCT FEATURES



Aircraft Grade Aluminum,
Illuminated Glass Reticle, Capped
Turrets, Second Focal Plane

PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	FOV @100 YDS	EYE RELIEF	WEIGHT	LENGTH
1.5-5x32 SFP	Capped	1"	CB100 SFP IR MOA	Matte	2.75"	62 - 20 ft	14.8 oz	8.8"



1.5X - CB100 SFP IR MOA



5X - CB100 SFP IR MOA



BEST
USED
FOR

VISIT THE
PRODUCT
PAGE





TALOS

If you ask any hunter they'll tell you they have probably filled more tags in the low-light hours than any other time. The Talos scope with Fully Multi-Coated lenses for clarity and brightness in low light, you'll be able to add precious minutes to every hunting day that you've worked so hard for. These scopes, with their 4X magnification range, will give you great versatility whether you are hunting whitetails in the dense forest or prairie dogs in the wide open ranges.





PRODUCT FEATURES



Aircraft Grade Aluminum Tube, Side Parallax Adjustment (select models), Illuminated Etched Glass Reticles, Non-illuminated reticles

PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	EYE RELIEF	FOV @100 YDS	WEIGHT	LENGTH
3-12x40 SFP	Capped	1"	BDC 600 IR	Matte	3.8-3.35"	34.1 - 8.9 ft	16.2 oz	12"
			CENTER X					
			MIL-DOT					
4-16x40 SFP	Capped	1"	BDC 600 IR	Matte	3.8-3.35"	24.1 - 6.3 ft	19.1 oz	12.9"
			MIL-DOT					
6-24x50 SFP	Capped	1"	BDC 600 IR	Matte	3.1-3.0"	16.8 - 4.5 ft	23 oz	13.9"
			ATMR1 SFP IR MIL					

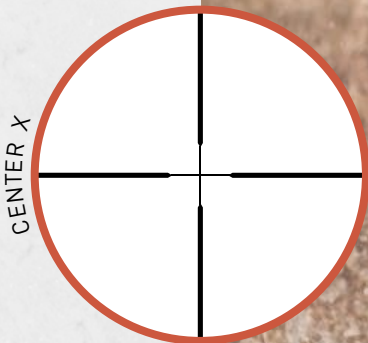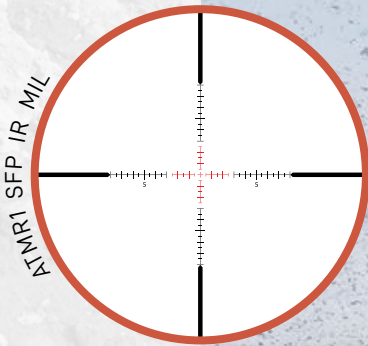

BEST
USED
FOR



VISIT THE
PRODUCT
PAGE





NEOS

Increasing your success while hunting doesn't necessarily have to decrease your savings account. The perfect example of that is the Neos series. This is the perfect scope for those who want quality and features all while staying on budget. The Neos has an impressive list of features which are designed and built to endure. It has a one piece aluminum tube. The lenses are Fully Multi Coated. Some of the models even have the latest side parallax focus technology. What about the cost? Let's just say the scope isn't the only thing that looks good, with ruggedness and precision we are proud of!



3-9x40 SFP



4-12x40 SFP



6-18x44 SFP

PRODUCT FEATURES



Aircraft Grade Aluminum Tube, Side Parallax Adjustment (select models), Illuminated Etched Glass Reticles, Non-illuminated reticles

PRODUCT SPECIFICATION

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	SURFACE FINISH	FOV EYE RELIEF @100 YDS	WEIGHT	LENGTH
3-9x40 SFP	Capped	1"	CENTER X	Matte	2.99-3.07"	37.8-12.6 ft	17 oz
			BDC 500 IR				
			BDC 22 RIM FIRE				
			BDC 250 MUZZLELOADER IR				
4-12x40 SFP	Capped	1"	CENTER X	Matte	3.11-3.15"	27.3-8.9 ft	18.1 oz
			BDC 500 IR				
			BDC 22 RIM FIRE				
6-18x44 SFP	Capped	1"	CENTER X	Matte	3.39-3.19"	17.5-5.9 ft	21.7 oz
			BDC 500 IR				




CENTER X



BDC 22 RIMFIRE



BDC 500 IR

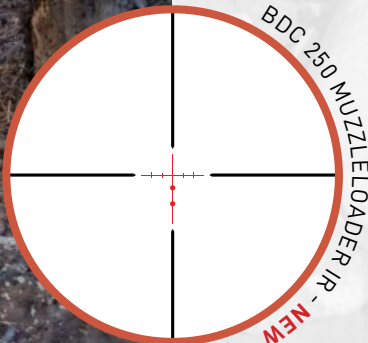

BDC 250 MUZZLELOADER IR - NEW

VISIT THE
PRODUCT
PAGE



BEST
USED
FOR



CRONUS 62 UHD

POWER X OBJ. LENS	EYEPIECE ANGLE	FOV @1000 YARDS	IDEAL APPLICATION
20-60x86	45 Degree	111 - 60 ft	HUNTING TARGET LONG RANGE

ARES 62 UHD

15-45x65	45 Degree	171 - 81 ft	HUNTING TARGET LONG RANGE
15-45x65	Straight	171 - 81 ft	HUNTING TARGET LONG RANGE
22X Reticle Eyepiece	45 Degree / Straight	143 ft	HUNTING TARGET LONG RANGE
20-60x85	45 Degree	99 - 47 ft	HUNTING TARGET LONG RANGE BIRD WATCHING
20-60x85	Straight	99 - 47 ft	HUNTING TARGET LONG RANGE BIRD WATCHING

ARGOS HD

20-60x85	45 Degree	102-48 ft	HUNTING TARGET LONG RANGE
20-60x85	Straight	102-48 ft	HUNTING TARGET LONG RANGE

TALOS

20-60x80 / Tan	45 Degree	82.9-48 ft	HUNTING TARGET LONG RANGE
20-60x80 / Green	45 Degree	82.9-48 ft	HUNTING TARGET LONG RANGE





CRONUS G2 UHD

You'll catch every detail with Athlon's latest spotting scope. Featuring a smooth single focus wheel, finely geared to facilitate hitting the sharpest focus. The Cronus G2 offers greater color definition, clarity, and light transmission than its brethren. From scouting game on a shadowed treeline to identifying birds in dimly wooded forests, the Cronus G2's enhanced contrast helps seperate your subject from its background.

With UHD Glass

Without UHD Glass



20-60x86 mm - **NEW**

PRODUCT FEATURES



BaK4 Prisms, Magnesium Chassis, Waterproof, Rotating Ring, Twist Up Eye-Cup, Tripod Adaptable

PRODUCT SPECIFICATION

POWER X OBJ. LENS	EYEPIECE ANGLE	EYE RELIEF	CLOSE FOCUS	FOV @1000 YARDS	WEIGHT	LENGTH X WIDTH
20-60x86 UHD	45 Degree	0.78"-0.70"	26.2 ft	111 - 60 ft	73.5 oz	16.2x4.0"




BEST
USED
FOR



VISIT THE
PRODUCT
PAGE



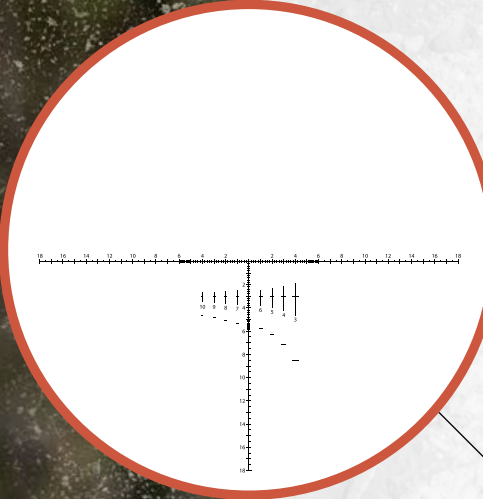

TSSR2 SFP MIL



22X Reticle Eyepiece



15-45x65 mm



15-45x65 mm

ARES G2 UHD

Raising the bar for versatility in a spotting scope, the Ares G2 UHD 15-45x65 is an exceptionally useful tool in the outdoor enthusiasts' arsenal. Compact and light enough for long treks through rugged terrain with clarity and magnification for long range viewing. Pair with the optional ranging reticle eyepiece to accurately estimate game or make calls for your buddy at the range.

PRODUCT FEATURES



BaK4 Prisms, Magnesium Chassis, Waterproof, Dual Focus, Rotating Ring, Twist Up Eye-Cup, Tripod Adaptable

PRODUCT SPECIFICATION

POWER X OBJ. LENS	EYEPIECE ANGLE	EYE RELIEF	CLOSE FOCUS	FOV @1000 YARDS	WEIGHT	LENGTH X WIDTH
15-45x65 G2 UHD	45 Degree	0.75"-0.63"	13.1 ft	171 - 81 ft	45.3 oz	13.5x3.0"
15-45x65 G2 UHD	Straight	0.75"-0.63"	13.1 ft	171 - 81 ft	45.9 oz	11.9x3.0"
22X Reticle Eyepiece	45 Degree/Straight	0.78"	13.1 ft	143 ft	8.0 oz	2.75x2.0"

VISIT THE
PRODUCT
PAGE



BEST
USED
FOR





ARES G2 UHD



When details matter, look no further than the 20-60x85 Ares G2 UHD. Whether you are a birder looking for variances in plumage, or a precision shooter spotting impacts at 1,000 yards the extra-low dispersion glass provides vivid clarity and resolution in a full-size spotting scope.



PRODUCT FEATURES



BaK4 Prisms, Magnesium Chassis, Waterproof, Dual Focus, Rotating Ring, Twist Up Eye-Cup, Tripod Adaptable

PRODUCT SPECIFICATION

POWER X OBJ. LENS	EYEPIECE ANGLE	EYE RELIEF	CLOSE FOCUS	FOV @1000 YARDS	WEIGHT	LENGTH X WIDTH
20-60x85 UHD	45 Degree	0.77"-0.70"	39.4 ft	99 - 47 ft	70.0 oz	16.9x4.0"
20-60x85 UHD	Straight	0.77"-0.70"	39.4 ft	99 - 47 ft	68.9 oz	16.9x4.0"

VISIT THE
PRODUCT
PAGE



BEST
USED
FOR





ARGOS G2 HD

We designed the Argos family of spotting scopes with good optical quality and ease of use in mind. The Argos spotting scope features our wide band fully multi-coated lenses and porro prisms with phased coating. They bring great clarity and brightness within the reach of all enthusiasts. The light-weight composite chassis protected by rubber armor is fog proof, waterproof, and filled with nitrogen gas to prevent internal fogging and promote better thermal stability. The product comes with a specially designed soft case allowing you to mount the spotting scope on a tripod and use it with the soft case on it all the time.



PRODUCT FEATURES



Composite Chassis, Fog Proof, Rotating Ring, Twist Up Eye-Cup, Tripod Adaptable

PRODUCT SPECIFICATION

POWER X OBJ. LENS	EYEPIECE ANGLE	EYE RELIEF	CLOSE FOCUS	FOV @1000 YARDS	WEIGHT	LENGTH X WIDTH
20-60x85 HD	45 Degree	0.77"-0.70"	39.4 ft	102-48 ft	70.0 oz	16.9x4.0"
20-60x85 HD	Straight	0.77"-0.70"	39.4 ft	102-48 ft	68.9 oz	16.9x4.0"



BEST USED FOR



VISIT THE PRODUCT PAGE





TALOS



We designed the Talos family of spotting scopes with good optical quality and ease of use in mind. The Talos spotting scope features our fully multi-coated lenses and K9 prisms with silver coating. They bring great clarity and brightness within the reach of all enthusiasts. The light-weight composite chassis is fog proof, waterproof, and filled with nitrogen gas to prevent internal fogging and promote better thermal stability. The product comes with a table-top tripod and soft case allowing you to carry the spotting scope and tripod in one package.

With Nitrogen Purging Without Nitrogen Purging



20-60x80 mm - TAN



20-60x80 mm - GREEN

PRODUCT FEATURES



Silver Coated Prism, Composite Chassis, Fog Proof, Rotating Ring, Twist Up Eye-Cup, Tripod Adaptable

PRODUCT SPECIFICATION

POWER X OBJ. LENS	EYEPIECE ANGLE	EYE RELIEF	CLOSE FOCUS	FOV @1000 YARDS	WEIGHT	LENGTH X WIDTH
20-60x80	45 Degree	0.70"-0.60"	19.7 ft	82.9 - 48 ft	38.5 oz	16.5x3.75"

VISIT THE
PRODUCT
PAGE



BEST
USED
FOR





PISTOL OPEN SIGHTS

POWER X OBJ. LENS	RETICLE DOT SIZE	MOUNT	IDEAL APPLICATION
Midas TSR1	3 MOA	Picatinny Rail	
	6 MOA	Picatinny Rail	
Midas TSR1-M	3 MOA	RMR	
	6 MOA	RMR	
Midas EDC	3 MOA	RMSC	
Talos EDC	3 MOA	RMSC	



RED DOTS

Midas TSR2	2 MOA	Picatinny Rail	
Midas TSR3	2 MOA	Picatinny Rail	
Midas LE GEN2	2 MOA	Picatinny Rail	



PRISM SCOPES

POWER X OBJ. LENS	MAGNIFI- CATION	MOUNT	IDEAL APPLICATION
MIDAS TSP1	1X	Picatinny Rail	
MIDAS TSP3	3X	Picatinny Rail	
MIDAS TSP4	4X	Picatinny Rail	



MAGNIFIERS

MIDAS M5	5X	Picatinny Rail	
MIDAS M3	3X	Picatinny Rail	





PISTOL OPEN SIGHTS

4 Models, 2 dot sizes, 6 options overall: Our expanding line-up of pistol-ready red dots covers everything from full-size firearms such as the Glock 17 MOS down to the small Springfield Hellcat. Due to consumer demand, the Midas TSR1 picks up a 6 MOA reticle option and is capable of being directly attached to picatinny rail or mounted to firearms using the Doctor footprint.



Midas TSR1




Midas TSR1-M - NEW



Midas EDC - NEW



Talos EDC - NEW

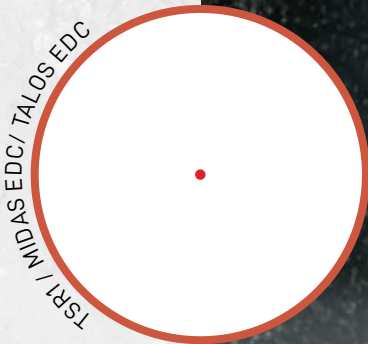

PRODUCT FEATURES

* Midas EDC | ** Talos EDC



Adjustable Illumination Settings, Aircraft Grade Aluminum, One Piece Chassis Construction, Picatinny Rail Mount (TSR1), RMR Mount (TSR1-M), RMSC Mount (Midas EDC, Talos EDC)

PRODUCT SPECIFICATION

AVAILABLE MODELS	OBJECTIVE LENS	MAGNIFICATION	RETICLE DOT SIZE	AVAILABLE RETICLES	DOT COLOR	IR SETTING	CENTER HEIGHT	CLICK VALUE	BATTERY	WEIGHT	LENGTH
MIDAS TSR1	24x17 mm	1X	3 MOA 6 MOA	TSR1	Red	1-10	0.96"	1 MOA	CR2032	2.8 oz	1.88"
MIDAS TSR1-M	24x17 mm	1X	3 MOA 6 MOA	TSR1	Red	1-10	0.67"	1 MOA	CR2032	1.1 oz	1.85"
MIDAS EDC	20x16 mm	1X	3 MOA	MIDAS EDC	Red	1-10	0.59"	Linear	CR2032	0.65 oz	1.6"
TALOS EDC	22x16 mm	1X	3 MOA	TALOS EDC	Red	Auto	0.55"	Linear	CR2032	0.36 oz	1.6"



BEST USED FOR



VISIT THE PRODUCT PAGE





RED DOTS



The speed and versatility of a Red Dot goes unmatched in close range engagements. Whether you are running an AR or PCC in competition, hunting, or running a Red Dot on an optics ready pistol, the TSR series of Red Dots has you covered. With 50,000 hours of battery life and motion sensor activation, the TSR series is always ready.



TSR2 / TSR3



LE-GEN2 (interchangeable)



Midas TSR3



Midas TSR2



Midas LE GEN2

* Midas LE GEN2

PRODUCT FEATURES



Adjustable Illumination Settings, Aircraft Grade Aluminum, One Piece Chassis Construction, Picatinny Rail Mount

PRODUCT SPECIFICATION

* Measured with Hi-Riser Mount | **Interchangeable reticle, see page 109

AVAILABLE MODELS	OBJECTIVE LENS	MAGNIFICATION	RETICLE DOT SIZE	AVAILABLE RETICLES	DOT COLOR	IR SETTING	CENTER HEIGHT	CLICK VALUE	BATTERY	WEIGHT	LENGTH
MIDAS TSR2	20 mm	1X	2 MOA	TSR2	Red	1-13	*1.59"	0.5 MOA	AAA	6.7 oz	2.79"
MIDAS TSR3	36 mm	1X	2 MOA	TSR3	Red	1-13	1.39"	0.5 MOA	CR2032	10.6 oz	3.73"
MIDAS LE GEN2	26x35 mm	1X	2 MOA	LE-GEN2**	Red	1-6	1.26"	0.5 MOA	CR2032	6.9 oz	3.40"



PRISM SCOPES

Quickly acquire and transition between targets at short and medium ranges with Athlon's prism scopes. Additional magnification offers greater versatility over traditional red dots. User-selectable red and green illumination matches conditions and shooter preferences, while etched reticles provide a foolproof aiming option when your battery runs out. The prism-based design allows for a more compact scope with a crisp and vivid image.



Midas TSP3



Midas TSP1



Midas TSP4

PRODUCT FEATURES



Adjustable Illumination Settings, Aircraft Aluminum, One Piece Chassis Construction, Picatinny Rail Mount, Capped Turrets

PRODUCT SPECIFICATION

*User selectable red/green illumination, black reticle (off)

AVAILABLE MODELS	OBJECTIVE LENS	MAGNIFICATION	FOV @100 YARDS	AVAILABLE RETICLES	RETICLE COLOR	CENTER HEIGHT	CLICK VALUE	BATTERY	WEIGHT	LENGTH
MIDAS TSP1	21 mm	1X	66 ft	TSP1	*Red/Green	0.88"L/ 1.49"H	1 MOA	AAA	6.25 oz	2.70"
MIDAS TSP3	28 mm	3X	34 ft	TSP3	*Red/Green	1.39"	0.5 MOA	CR2032	16.0 oz	5.1"
MIDAS TSP4	30 mm	4X	9 ft	TSP4	*Red/Green	1.39"	0.5 MOA	CR2032	16.8 oz	5.7"

TSP1



TSP3



TSP4



VISIT THE PRODUCT PAGE





VISIT THE
PRODUCT
PAGE



BEST
USED
FOR



MAGNIFIERS



RED DOT SIGHTS | MAGNIFIERS

Many times when in the field or during competitions you need to transition between no magnification for speed in close-range combat and magnification for precision shooting as situation dictates.

The Athlon 3 or 5 power magnifier mounts behind a traditional red-dot sight to provide magnification when needed. The mount has the ability to swing out of the way when not in use, but can quickly be placed behind the Red Dot to increase the magnification for longer mid-range shots. Rugged construction. Multi-coated lenses and 30mm tube for excellent light transmission. Nitrogen purged, shockproof, waterproof, and fogproof.



Midas M3 - with flip mount



Midas M5 - with flip mount

PRODUCT FEATURES



Fog Proof, Shockproof, One Piece Chassis Construction, Aircraft Grade Aluminum, Flip Mount, Picatinny Rail Mount

PRODUCT SPECIFICATION

* Center height with flip mount

AVAILABLE MODELS	OBJECTIVE LENS	MAGNIFICATION	FOV @100 YARDS	EYE RELIEF	WEIGHT	LENGTH	*CENTER HEIGHT
M3	23.5 mm	3X	38.3 ft	2.7"	10.5 oz	2.9"	1.42"
M5	27.2 mm	5X	23.0 ft	2.5"	11.6 oz	3.7"	1.42"

athlonoptics.com




MIDAS G2 1 MILE



The fastest rangefinder in Athlon's lineup! When seconds matter, you'll only need to spare 1/10th of a second. This Midas G2 1 Mile features a scan more providing nearinstantaneous feedback as you scan from target to target. Capable of displaying true angle-compensated distances, including the ability to measure height and line of sight distances to help you plan your next move.



Midas G2 1 MILE - **NEW**

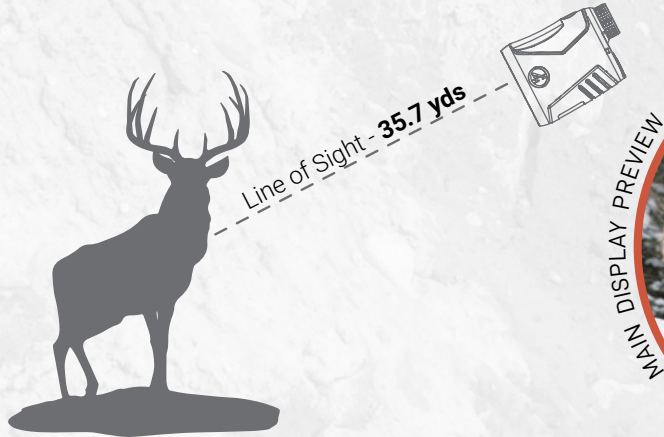

RANGING MODES TO CHOOSE FROM

INCLINE ANGLE (T) MODE	Displays the incline angle of your position to the target.
HORIZONTAL DISTANCE (H) MODE	Displays the angle compensated distance to the target. This is the primary mode used by most hunters (Both bow and rifle).
VERTICAL DISTANCE (V) MODE	Displays the vertical distance of your position to the target.

PRODUCT FEATURES



OLED Illuminating Display, Five Illumination Settings, Dual Units of Measurement (Y/M), Angle Compensation Mode, Line of Sight Mode, Scan Mode, Hunting and Golf Mode, Diopter Adjustment

PRODUCT SPECIFICATION

RANGING REFLECTIVE	RANGING DEER	ACCURACY	MAX ANGLE READING	MAGNIFICATION	OBJ. LENS DIAMETER	FOV	EYE RELIEF	POWER SUPPLY
1760 Y	800 Y	±0.5Y	±70°	6X	21 mm	6°	15 mm	CR2-3V



BEST
USED
FOR



VISIT THE
PRODUCT
PAGE





TALOS G2 850Y

We've redesigned the Talos rangefinder into a more compact frame. The Athlon Talos laser rangefinder still brings affordability to the average hunter. Accurately range deer-sized game from 6 to 300 yards and reflective targets out to 850 yards. Nitrogen purging, a water-tight body, and protective rubber armor will keep your range finder working for you even when the weather doesn't.



MAIN DISPLAY PREVIEW



Talos G2 850Y - **NEW**

RANGING MODES TO CHOOSE FROM

INCLINE ANGLE (T) MODE	Displays the incline angle of your position to the target.
HORIZONTAL DISTANCE (H) MODE	Displays the angle compensated distance to the target. This is the primary mode used by most hunters (Both bow and rifle).
VERTICAL DISTANCE (V) MODE	Displays the vertical distance of your position to the target.

PRODUCT FEATURES



Multi-Coated Lenses, Dual Units of Measurement (Y/M), Angle Compensation Mode, Line of Sight Mode, Scan Mode, Hunting and Golf Mode, Diopter Adjustment

PRODUCT SPECIFICATION

RANGING REFLECTIVE	RANGING DEER	ACCURACY	MAX ANGLE READING	MAGNIFICATION	OBJ. LENS DIAMETER	FOV	EYE RELIEF	POWER SUPPLY
850 Y	300 Y	±1Y	±70°	6X	21 mm	7°	14 mm	CR2-3V


VISIT THE
PRODUCT
PAGE



BEST
USED
FOR



The following table contains detailed specifications of all Athlon Optics riflescopes allowing you to compare them easily and find the right one for you.

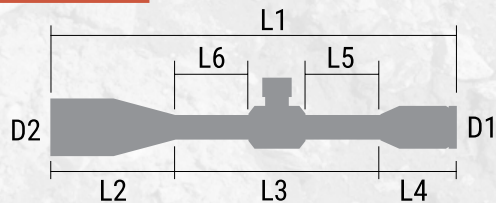

POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	EYE RELIEF	FOV @100 YARDS	WEIGHT	CLICK VALUE	ADJ. PER ROTATION	TOTAL ELEVATION ADJ.	TOTAL WINDAGE ADJ.	PARALLAX ADJ.	PURGING MAT.	DIMENSIONS							
													L1	L2	L3	L4	L5	L6	D1	D2
CRONUS BTR GEN2 *UHD / HD																				
1-6x24 SFP	Exposed & Locking	30 mm	ATSR2 SFP IR MOA	3.6-4.0"	106.9-17.7 ft	18.8 oz	0.5 MOA	32 MOA	120 MOA	120 MOA	Fixed 100 yds	Argon	10.4" /	6.9"	3.5"	2.0"	3.6"	1.7"	1.2"	
*4.5-29x56 FFP	Exposed	34 mm	APLR5 FFP IR MOA	3.6-3.8"	24.8-3.83 ft	35.8 oz	0.25 MOA	25 MOA	110 MOA	64 MOA	Side Focus 25yds - ∞	Argon	14.4"	4.1"	6.4"	3.9"	2.6"	2.1"	1.8"	2.6"
			APRS1 FFP IR MIL				0.1 MIL	10 MIL	32 MIL	18 MIL										
			APRS6 FFP IR MIL																	
ARES ETR UHD																				
* Exposed - Elevation Turret / Capped - Windage Turret ** Locking Feature on Windage only																				
1-10x24 FFP	*Exposed/ Capped	34 mm	ATMR2 FFP IR MOA	3.7"	117.3-11.7 ft	26.9 oz	0.25 MOA	25 MOA	100 MOA	80 MOA	Fixed 100 yds	Argon	10.0" /	6.9"	3.1"	2.5"	2.6"	1.8"	1.3"	
3-18x50 FFP	**Exposed & Locking	34 mm	ATMR3 FFP IR MIL	3.74"	39.2-6.65 ft	31.4 oz	0.1 MIL	10 MIL	29 MIL	25 MIL	Side Focus 10yds - ∞	Argon	14.2"	4.2"	6.6"	3.4"	2.6"	2.5"	1.83"	2.25"
			APLR6 FFP IR MOA				0.25 MOA	25 MOA	110 MOA	80 MOA										
			APRS6 FFP IR MIL				0.1 MIL	10 MIL	32 MIL	25 MIL										
4.5-30x56 FFP	**Exposed & Locking	34 mm	APLR2 FFP IR MOA	3.9"	24.5-3.75 ft	36.5 oz	0.25 MOA	25 MOA	110 MOA	110 MOA	Side Focus 25yds - ∞	Argon	15.3"	5.0"	6.6"	3.7"	2.7"	2.3"	1.83"	2.5"
			APLR5 FFP IR MOA				0.1 MIL	10 MIL	32 MIL	32 MIL										
			APRS1 FFP IR MIL																	
			APRS6 FFP IR MIL																	
ARES BTR GEN2 HD																				
2.5-15x50 FFP	Exposed	30 mm	APLR4 FFP IR MOA	3.9"	41.8-6.8 ft	27.3 oz	0.25 MOA	25 MOA	100 MOA	100 MOA	Side Focus 10yds - ∞	Argon	13.8"	4.7"	5.5"	3.6"	1.8"	2.2"	1.78"	2.25"
4.5-27x50 FFP	Exposed	30 mm	APRS5 FFP IR MIL	3.9"	22.7-3.8 ft	27.3 oz	0.1 MIL	10 MIL	29 MIL	29 MIL	Side Focus 25yds - ∞	Argon	13.8"	4.7"	5.5"	3.6"	1.8"	2.2"	1.78"	2.25"
			APLR4 FFP IR MOA				0.25 MOA	25 MOA	80 MOA	80 MOA										
			APRS5 FFP IR MIL				0.1 MIL	10 MIL	24 MIL	24 MIL										
MIDAS TAC HD																				
* Exposed - Elevation Turret / Capped - Windage Turret																				
4-16x44 FFP	*Exposed/ Capped	30 mm	APRS2 FFP MIL	3.7"	27.7-7 ft	23.8 oz	0.1 MIL	10 MIL	30 MIL	15 MIL	Side Focus 10yds - ∞	Argon	14.2"	4.3"	6.3"	3.6"	2.5"	2.6"	1.71"	2.0"
5-25x56 FFP	*Exposed/ Capped	34 mm	APLR4 FFP MOA	3.7"	22.1-4.5 ft	30.0 oz	0.25 MOA	25 MOA	110 MOA	110 MOA	Side Focus 25yds - ∞	Argon	15.1"	4.8"	6.6"	3.7"	2.7"	2.36"	1.83"	2.5"
			APRS3 FFP MIL				0.1 MIL	10 MIL	32 MIL	32 MIL										
			APRS6 FFP MIL																	
6-24x50 FFP	*Exposed/ Capped	30 mm	APLR4 FFP MOA	3.7"	17.8-4.6 ft	26.3 oz	0.25 MOA	25 MOA	85 MOA	50 MOA	Side Focus 10yds - ∞	Argon	14.6"	4.5"	6.3"	3.8"	2.2"	2.6"	1.71"	2.25"
			APRS2 FFP MIL				0.1 MIL	10 MIL	25 MIL	15 MIL										
			APRS3 FFP MIL																	




	POWER X OBJ. LENS	TURRET STYLE	TUBE SIZE	AVAILABLE RETICLES	EYE RELIEF	FOV @100 YARDS	WEIGHT	CLICK VALUE	ADJ. PER ROTATION	TOTAL ELEVATION ADJ.	TOTAL WINDAGE ADJ.	PARALLAX ADJ.	PURGING MAT.	DIMENSIONS							
														L1	L2	L3	L4	L5	L6	D1	D2
	ARGOS HMR																				
2-12x42 SFP	Capped	1"	BDC 600	3.6"	55.7- 9.6 ft	19.8 oz	0.25 MOA	15 MOA	80 MOA	80 MOA	Side Focus 10 yds - ∞	Argon	11.8"	3.3"	5.3"	3.2"	2.1"	1.6"	1.7"	2.0"	
			BDC 600A																		
			AHMC SFP MOA																		
4-20x50 SFP	Capped	1"	BDC 600A	3.6"	27.9- 5.6 ft	21.0 oz	0.25 MOA	15 MOA	80 MOA	80 MOA	Side Focus 10 yds - ∞	Argon	13.2"	5.0"	5.0"	3.2"	1.8"	1.6"	1.7"	2.3"	
			AHMC SFP MOA				0.1 MIL	10 MIL	18 MIL	18 MIL											
			MIL-DOT																		
	TALOS BTR GEN2																				
1-4x24 SFP	Capped	30 mm	ATMR6 SFP IR MOA	4.5-3.5"	110- 26 ft	16.8 oz	0.5 MOA	30 MOA	130 MOA	130 MOA	Fixed 100 yds	Nitrogen	9.4" /	5.8"	3.6"	1.9"	2.6"	1.8"	1.2		
			AHSR14 SFP IR MIL				0.2 MIL	21 MIL	40 MIL	40 MIL											
			ATMR7 SFP IR MIL																		
4-14x44 FFP	Exposed	30 mm	APLR10 FFP IR MOA	3.2- 3.15"	27.7- 7.9 ft	25.9 oz	0.25 MOA	15 MOA	65 MOA	65 MOA	Side Focus 10 yds - ∞	Nitrogen	12.9"	3.35"	6"	3.55"	2.1"	1.8"	1.7"	1.8	
			APLR2 FFP IR MIL				0.1 MIL	6 MIL	20 MIL	20 MIL											
			APRS10 FFP IR MIL																		
	TALOS																				
1.5-5x32 SFP	Capped	1"	CB100 SFP IR MOA	2.75"	62 - 20 ft	14.8 oz	0.5 MOA	30 MOA	80 MOA	80 MOA	Fixed 50 yds	Nitrogen	8.8"	1.95"	4.0"	2.85"	1.25"	1.3"	1.4"	1.54"	
3-12x40 SFP	Capped	1"	BDC 600 IR	3.82- 3.35"	34.1 - 8.9 ft	16.2 oz	0.25 MOA	15 MOA	60 MOA	60 MOA	Side Focus 15yds - ∞	Nitrogen	12"	3.6"	4.8"	3.7"	1.9"	1.3"	1.8"	1.9"	
			CENTER X				0.1 MIL	5 MIL	20 MIL	20 MIL											
			MIL-DOT																		
4-16x40 SFP	Capped	1"	BDC 600 IR	3.8- 3.35"	24.1 - 6.3 ft	19.1 oz	0.25 MOA	15 MOA	50 MOA	50 MOA	Side Focus 15yds - ∞	Nitrogen	12.9"	3.5"	5.8"	3.7"	1.9"	2.2"	1.8"	1.9"	
			MIL-DOT				0.1 MIL	5 MIL	20 MIL	20 MIL											
6-24x50 SFP	Capped	1"	BDC 600 IR	3.1- 3.0"	16.8 - 4.5 ft	23 oz	0.25 MOA	15 MOA	60 MOA	60 MOA	Side Focus 10yds - ∞	Nitrogen	13.9"	4.0"	6.2"	3.7"	1.9"	2.7"	1.8"	2.2"	
			ATMR1 SFP IR MIL				0.1 MIL	5 MIL	18 MIL	18 MIL											
	NEOS																				
3-9x40 SFP	Capped	1"	CENTER X	2.99- 3.07"	37.8- 12.6 ft	17.0 oz	0.25 MOA	15 MOA	80 MOA	80 MOA	Fixed 100 yds	Nitrogen	12.4"	3.3"	5.6"	3.5"	2.3"	2.3"	1.6"	1.9"	
			BDC 500 IR																		
			BDC 22 RIM FIRE																		
			BDC 250 MUZZLE LOADER IR																		
4-12x40 SFP	Capped	1"	CENTER X	3.11- 3.15"	27.3- 8.9 ft	18.1 oz	0.25 MOA	15 MOA	80 MOA	80 MOA	Side Focus 10 yds - ∞	Nitrogen	12.4"	3.3"	5.6"	3.5"	2.3"	2.3"	1.6"	1.9"	
			BDC 500 IR																		
			BDC 22 RIM FIRE																		
6-18x44 SFP	Capped	1"	CENTER X	3.39- 3.19"	17.5- 5.9 ft	21.7 oz	0.25 MOA	15 MOA	80 MOA	80 MOA	Side Focus 10 yds - ∞	Nitrogen	13.5"	3.7"	6.3"	3.5"	2.3"	3.0"	1.6"	2.0"	
			BDC 500 IR																		





CRONUS BTR GEN2 UHD
ATSR2 SFP IR MOA

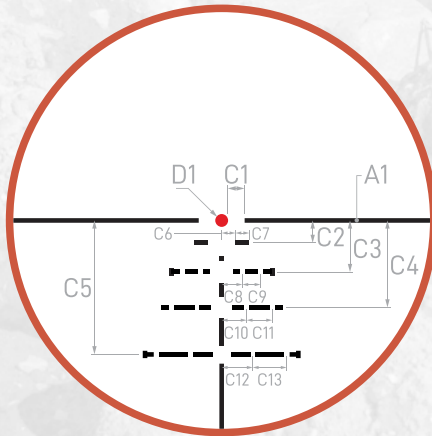


ATSR2 SFP IR MOA Designed around the .223/5.56mm using a 69 grain Sierra Match King and a 200 yard zero. The open center design allows shooters to engage 12-18" targets out to 600 yards by quickly bracketing the target. Subtension holds for 300, 400, 500, and 600 yards are calibrated to compensate for 0, 5, and 10 MPH winds. The 3-post cross hair design quickly draws the shooters attention to the illuminated center dot. Perfect for 3-gun competitions or the hunter looking for short to midrange engagement when seconds matter.

*for 1-6x24: subtension valid @ 6x

SUBTENSIONS IN MOA

A1	C1	C2	C3	C4	C5	C6	C7
0.5	2.5	2.4	5.6	9.5	14.6	1.5	1.5
C8	C9	C10	C11	C12	C13	D1	
2.25	2	2.7	2.8	3.4	3.7	1.4	

CRONUS BTR GEN2 UHD
APLR5 FFP IR MOA

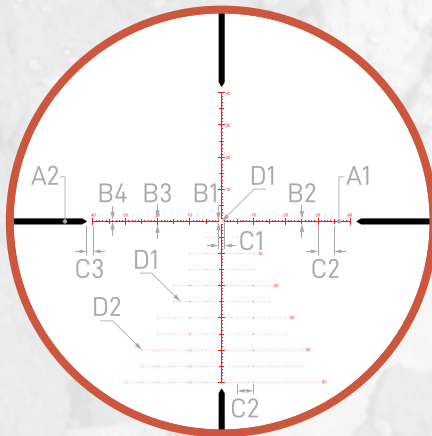


APLR5 FFP IR MOA reticle is designed for Precision Rifle Series competition and any other long-range applications that require accurate ranging capability. It can help you quickly determine distance, holdover positions, windage correction and leads for a moving target. The unique design of the fine 1 moa hash mark increments from center to 40 moa to both left and right helps the shooter determine a quick windage holdover position after he or she dialed in elevation on their targets. The floating 0.2 moa center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	B4
0.13	2	0.6	1.5	2	0.5
C1	C2	C3	D1	D2	
2	5	2	0.2	0.3	

CRONUS BTR GEN2 UHD
APRS1 FFP IR MIL

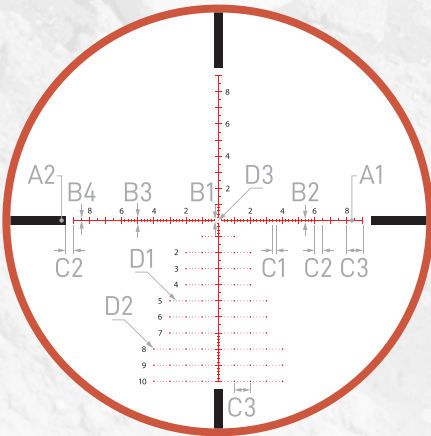


APRS1 FFP IR MIL reticle is designed for Precision Rifle Series competition and any other long-range applications that require accurate ranging capability. It can help you quickly determine distance, holdover positions, windage correction and leads for a moving target. The unique design of fine .2 mil hash mark increments from center to 6 mils to both left and right helps the shooter set a quick windage holdover position after he or she dials in elevation on their targets. The floating 0.04 center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

SUBTENSIONS IN MIL

A1	A2	B1	B2	B3	B4
0.025	0.5	0.1	0.18	0.4	0.15
C1	C2	C3	D1	D2	D3
0.2	0.5	1	0.05	0.1	0.04

CRONUS BTR GEN2 UHD
APRS6 FFP IR MIL

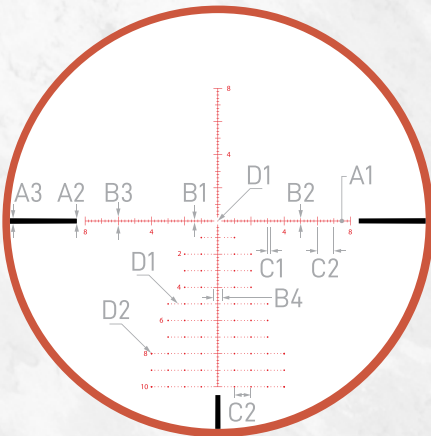


APRS6 FFP IR MIL reticle is designed for Precision Rifle Series competition and any other long-range applications that require accurate ranging capability. It can help you quickly determine distance, hold-over positions, windage correction and leads for a moving target. The unique design of fine 0.2 mil hash mark increments from center to four directions helps the shooter set a quick elevation or windage holdover position. The floating 0.05 mil center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

SUBTENSIONS IN MIL

A1	A2	A3	B1	B2	B3
0.025	0.3	0.4	0.18	0.35	0.55
B4	C1	C2	D1	D2	D3
0.4	0.2	1	0.04	0.05	0.1

ARES ETR UHD
ATMR2 FFP IR MOA

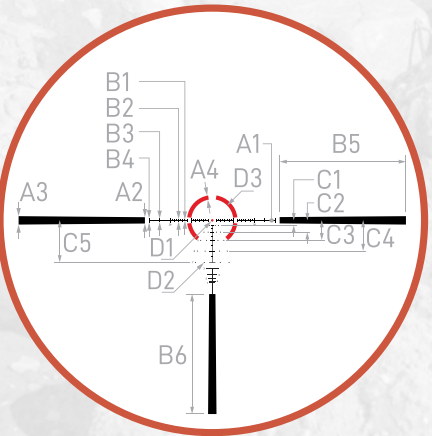


ATMR2 FFP IR MOA reticle is designed for fast close-range situations and mid-range shooting, using 68 or 69 gr .223/5.56 Nato cartridges. On 1x the 20 moa illuminated quartered ring and 1.2 moa center dot provide the same fast-acquisition capabilities of a standard red dot. Increasing magnification, the holdover and windage subtensions become visible. The .5 moa wind holds for 5 and 10 mph winds. As a First Focal Plane scope the reticle remains valid throughout the magnification range providing holdovers out to 700 yards. A built-in ranging tree on the lower vertical post provides quick range estimation on a 36" tall silhouette target.

SUBTENSIONS IN MOA

A1	A2	A3	A4	B1	B2	B3	B4	B5
0.25	3	4	2	0.4	1.2	1.5	2	60
B6	C1	C2	C3	C4	C5	D1	D2	D3
57	2.4	5.6	9.5	14.6	20	1.2	0.5	20

ARES ETR UHD
APLR6 FFP IR MOA

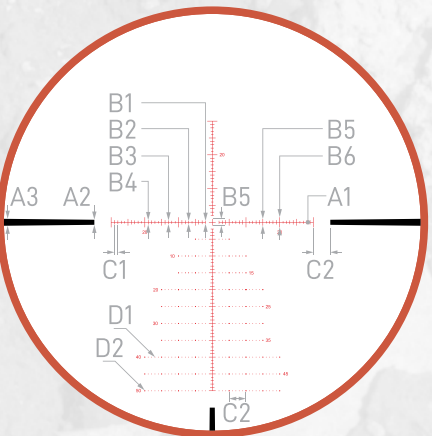


APLR6 FFP IR MOA reticle has a 2 moa floating center cross with 1 moa hash mark increments and drop lines in 5 moa increments on vertical direction down to 50 moa, both of which help you quickly lock in your target and set holdover positions. The gap between the floating center cross and the first hash mark is 1 moa at four directions. The drop lines have smaller dots with 1 moa in between and bigger dots at each 5 moa interval, starting 10 moa length horizontally and end up 40 moa in length at the 50 moa drop line. The unique design of the floating center cross with 2 moa span in the middle provides little to none target obstruction for engaging small targets at long distances.

SUBTENSIONS IN MOA

A1	A2	A3	B1	B2	B3	B4
0.18	1.5	2	0.7	0.9	1.1	1.3
B5	B6	C1	C2	D1	D2	
2	3	1	5	0.2	0.3	

ARES ETR UHD
ATMR3 FFP IR MIL

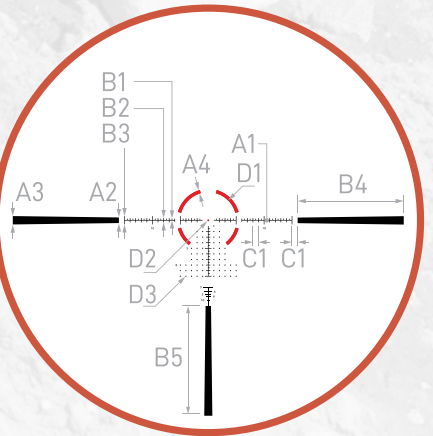


The most versatile scope in our line-up, paired with an equally versatile reticle. Fast CQB or long-range engagements are easily made thanks to this uniquely designed First Focal Plane reticle. The illuminated 10 mil quartered ring and precise .35 mil center aid in fast acquisition on low magnification. As the magnification increases the versatile holdover and windage subtensions become visible, turning this into a mid to long range capable optic. If mil ranging isn't for you, default to the simple silhouette target ranging tree at just above the vertical post.

SUBTENSIONS IN MIL

A1	A2	A3	A4	B1	B2	B3
0.11	1	1.5	0.6	0.3	0.8	1.5
B4	B5	C1	D1	D2	D3	
19	19.67	1	10	0.35	0.15	

ARES ETR UHD
APRS6 FFP IR MIL

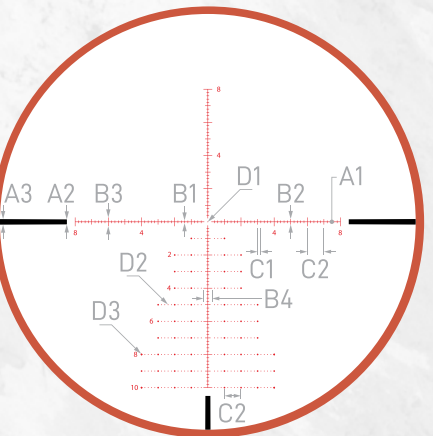

APRS6 FFP IR MIL reticle is designed for Precision Rifle Series competition and any other long-range applications that require accurate ranging capability. It can help you quickly determine distance, hold-over positions, windage correction and leads for a moving target. The unique design of fine 0.2 mil hash mark increments from center to four directions helps the shooter set a quick elevation or windage hold-over position. The floating 0.05 mil center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.


SUBTENSIONS IN MIL

A1	A2	A3	B1	B2	B3
0.05	0.4	0.6	0.18	0.35	0.55
B4	C1	C2	D1	D2	D3
0.4	0.2	1	0.05	0.06	0.1





ARES ETR UHD
APLR5 FFP IR MOA

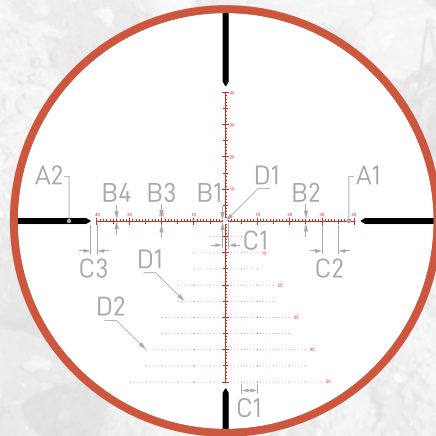


APLR5 FFP IR MOA reticle is designed for Precision Rifle Series competition and any other long-range applications that require accurate ranging capability. It can help you quickly determine distance, holdover positions, windage correction and leads for a moving target. The unique design of the fine 1 moa hash mark increments from center to 40 moa to both left and right helps the shooter determine a quick windage holdover position after he or she dialed in elevation on their targets. The floating 0.2 moa center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	B4
0.13	2	0.6	1.5	2	0.5
C1	C2	C3	D1	D2	
2	5	2	0.2	0.3	

ARES ETR UHD
APRS1 FFP IR MIL

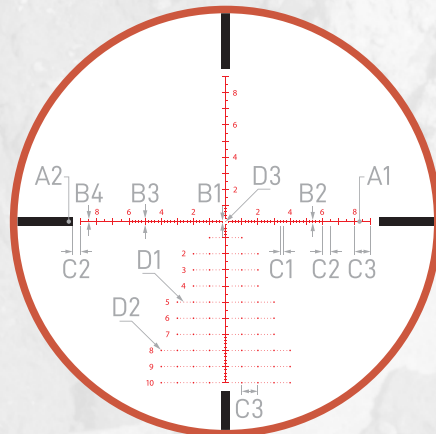


APRS1 FFP IR MIL reticle is designed for Precision Rifle Series competition and any other long-range applications that require accurate ranging capability. It can help you quickly determine distance, holdover positions, windage correction and leads for a moving target. The unique design of fine .2 mil hash mark increments from center to 6 mils to both left and right helps the shooter set a quick windage holdover position after he or she dialed in elevation on their targets. The floating 0.03 center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

SUBTENSIONS IN MIL

A1	A2	B1	B2	B3	B4
0.03	0.5	0.1	0.18	0.4	0.15
C1	C2	C3	D1	D2	D3
0.2	0.5	1	0.05	0.1	0.03

ARES ETR UHD
APLR2 FFP IR MOA

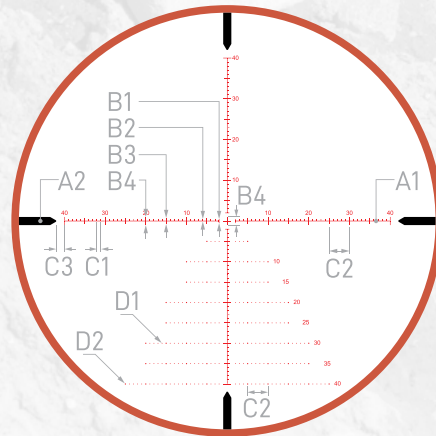


APLR2 FFP IR MOA reticle has a large illuminated center with 1 moa hash mark increments and drop lines in 5 moa increment on vertical direction down to 40 moa, both of which help you quickly lock in your target and set holdover positions. The illuminated portion has a 2 moa span center cross with illuminated cross line extends to 40 moa on both vertical and horizontal direction. The unique design of having droplines going down to 40 moa with 5 moa between each drop line and 1 moa hash marks in between provide excellent hold over positions for long precision shooting.

SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	B4
0.14	2	1	0.5	1.5	2
C1	C2	C3	D1	D2	
1	5	2	0.2	0.3	

ARES BTR GEN2 HD
APLR4 FFP IR MOA

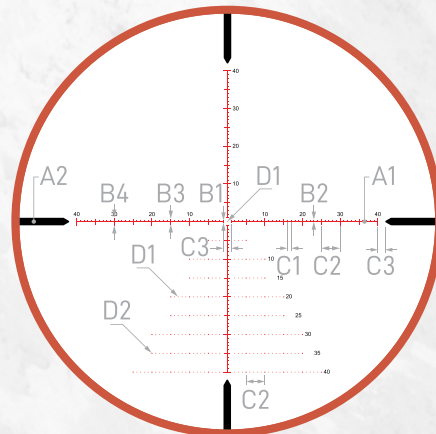


APLR4 FFP IR MOA reticle has a 0.2 moa floating center dot with 1 moa hash mark increments and drop lines in 5 moa increments on vertical direction down to 40 moa, both of which help you quickly lock in your target and set holdover positions. The gap between the floating center dot and the first hash mark is 1 moa at four directions. The drop lines have smaller dots with 1 moa in between and bigger dots at each 5 moa interval, starting 10 moa length horizontally and end up 50 moa in length at the 40 moa drop line. The floating center dot with 2moa span gap in the middle provides little to no target obstruction for engaging small targets at long distances.

SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	B4
0.24*	2	0.6	0.5	1.5	2
C1	C2	C3	D1	D2	
1	5	2	0.2	0.3	

*for 2.5-15x50: A1 = 0.24
for 4.5-27x50: A1 = 0.13

ARES BTR GEN2 HD
APRS5 FFP IR MIL

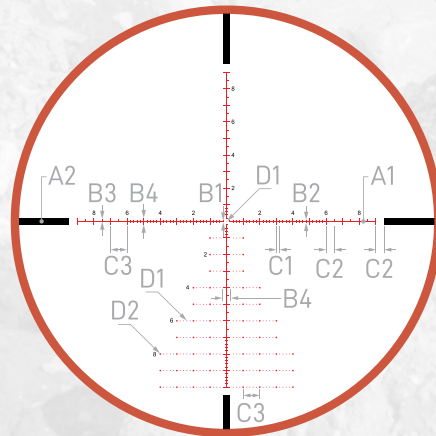


APRS5 FFP IR MIL reticle is designed for Precision Rifle Series competition and any other long-range applications that require accurate ranging capability. It can help you quickly determine distance, hold-over positions, windage correction and leads for a moving target. The unique design of fine .2 mil hash mark increments from center to 6 mils to both left and right helps the shooter set a quick windage holdover position after he or she dialed in elevation on their targets. The floating 0.05 mil center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

SUBTENSIONS IN MIL

A1	A2	B1	B2	B3	B4
0.06*	0.5*	0.1	0.18	0.15	0.4
C1	C2	C3	D1	D2	
0.2	0.5	1	0.05	0.1	

*for 2.5-15x50: A1 = 0.06, A2 = 0.5
for 4.5-27x50: A1 = 0.03, A2 = 0.4

MIDAS TAC HD
APLR4 FFP MOA

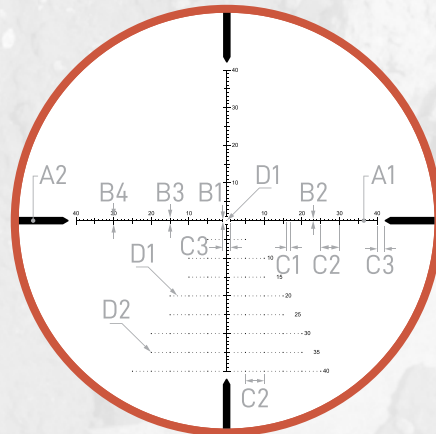


APLR4 FFP MOA reticle is a blend of precision marksman and long-range hunter. The open center design eliminates target obstruction by utilizing a .2 moa diameter dot. 1 moa hash-mark increments provide fast holdovers up to 40 moa, compensating for both windage and elevation.

SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	B4
0.12	2	0.6	0.5	1.5	2
C1	C2	C3	D1	D2	
1	5	2	0.2	0.3	

MIDAS TAC HD
APRS2 FFP MIL

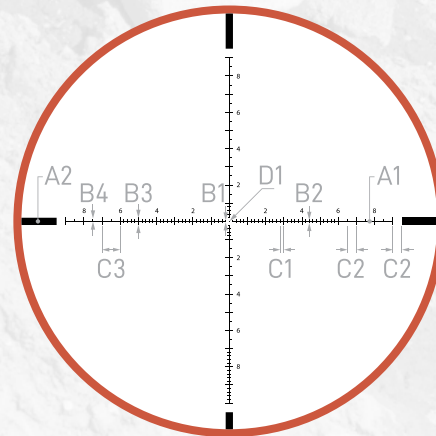


APRS2 FFP MIL reticle is designed for Precision Rifle Series competition and any other long-range applications that require accurate ranging capability. It can help you quickly determine distance, holdover positions and windage corrections. The unique design of fine .2 mil hash mark increments from center to 6 mils to both left and right helps the shooter set a quick windage holdover position after he or she dialed in elevation on their targets. The floating 0.05 (0.06) center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

SUBTENSIONS IN MIL

A1	A2	B1	B2	B3	
0.04*	0.4	0.1	0.18	0.4	
B4	C1	C2	C3	D1	
0.15	0.2	0.5	1	0.06*	

*for 4-16x44: A1 = 0.04, D1 = 0.06
for 6-24x50: A1 = 0.03, D1 = 0.05

MIDAS TAC HD
APRS3 FFP MIL

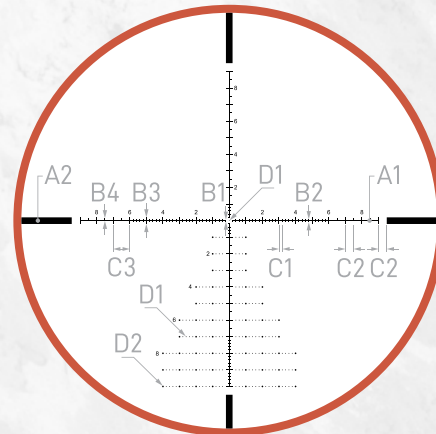

APRS3 FFP MIL reticle is a dual use design. Allowing the shooter to accurately range and compensate windage and elevation holdovers should they prefer not to make turret elevation adjustments between shots. Quick windage or lead holdovers is possible due to the .2 mil increment hash marks. This open-center reticle features a .05 mil floating dot, quickly drawing the shooters attention to the center.


SUBTENSIONS IN MIL

A1	A2	B1	B2	B3	B4
0.03	0.4	0.1	0.18	0.4	0.15
C1	C2	C3	D1	D2	
0.2	0.5	1	0.05	0.1	





MIDAS TAC HD
APRS6 FFP MIL

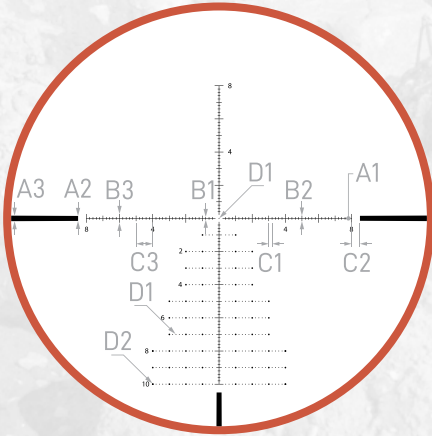


APRS6 FFP MIL reticle is designed for Precision Rifle Series competition and any other long-range applications that require accurate ranging capability. It can help you quickly determine distance, hold-over positions, windage correction and leads for a moving target. The unique design of fine 0.2 mil hash mark increments from center to four directions helps the shooter set a quick elevation or windage hold-over position. The floating 0.05 mil center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

SUBTENSIONS IN MIL

A1	A2	A3	B1	B2	B3
0.03	0.3	0.4	0.18	0.35	0.55
C1	C2	C3	D1	D2	
0.2	0.5	1	0.05	0.1	

MIDAS HMR HD
BDC 600A IR

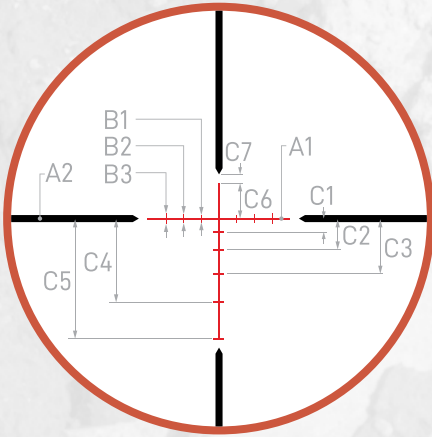


BDC 600A IR reticle can be used effectively with a variety of firearms giving your accurate ranges and reference marks which can be used to compensate for bullet drift in windy conditions or range distances. The user can sight in at 100 yards on any magnification setting, but for the ballistic reticle feature to function properly, the scope's magnification must be set to the correct power.

*for 2.5-15x50:
subtension valid @ 15x

SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	C1
0.15	0.6	0.8	1	1.2	1.5
C2	C3	C4	C5	C6	C7
3.5	6.25	9.5	13.6	4	1

MIDAS HMR HD
AHMR SFP IR MOA

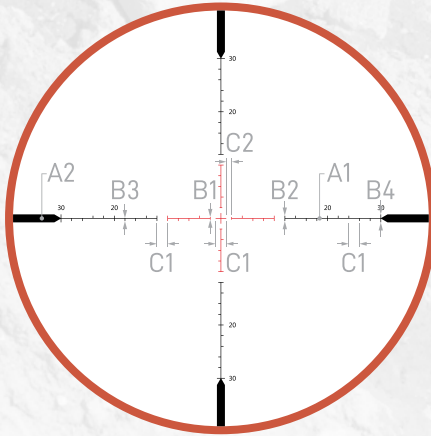


AHMR SFP IR MOA reticle has an illuminated 20 moa center with a 2 moa center cross and 2 moa incremental hash marks which provide a unique two layer visual reference for a shooter to locate and get dead on the target within a blink of an eye. The illuminated reticle provides excellent low light visibility. The unique design of the markings with 2 & 4 moa and 6 & 8 moa locating at the opposite side of the lines gives you a clear reading of the markings with no confusions.

*for 2.5-15x50:
subtension valid @ 15x

SUBTENSIONS IN MOA

A1	A2	B1	B2
0.12	1.5	0.5	1
B3	B4	C1	C2
0.5	1.5	2	1

MIDAS BTR GEN2 HD
ATSR16 SFP IR MOA

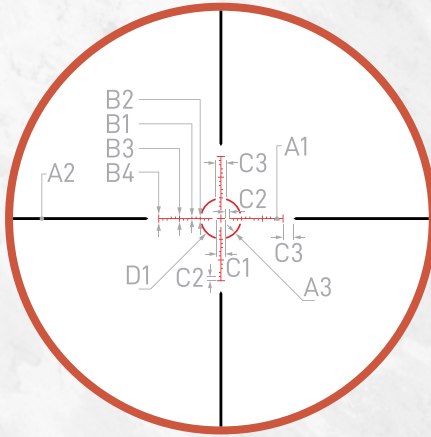


ATSR16 SFP IR MOA reticle has a large illuminated center and 2 moa incremental hash marks, which help you quickly lock in your target and set holdover positions. The illuminated center with a 20 moa diameter circle in the middle has a 2 moa center cross and 2 moa incremental hash marks extended to 30 moa at each direction on both vertical and horizontal lines. The cross lines, middle circle, and center cross provide a unique three layer visual reference for a shooter to locate the target and set dead on the center cross within a blink of an eye.

*for 1-6x24: subtension valid @ 6x

SUBTENSIONS IN MOA

A1	A2	A3	B1	B2	B3
0.4	1.38	0.75	1	2	3
B4	C1	C2	C3	D1	
4	4	2	5	20	

MIDAS BTR GEN2 HD
ATSR4 SFP IR MOA

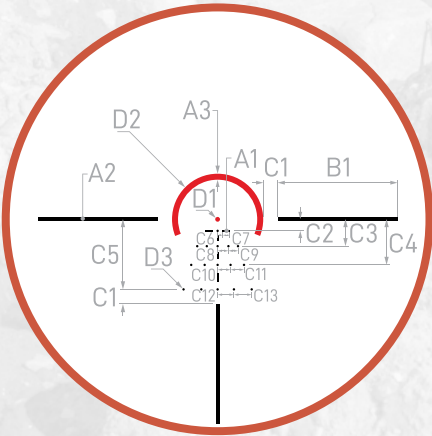


ATSR4 SFP IR MOA reticle is designed for quick target acquisition, speed, and precision shooting in short to mid-range environments. Ideal for CQC and 3-gun competition, this reticle is calibrated for a 68 grain Hornady and 69 grain Sierra cartridges, and suitable for any 5.56 Nato/.223 caliber rifle using a 200 yard zero. The 25 moa horizontal and lower 1/3rd crosshairs quickly draw the shooter's eye to the illuminated 19 moa horse-shoe and 1.4 moa center dot. With a 200 yard zero, the precise .5 moa elevation holds compensate for 300, 400, 500, and 600 yards and 0, 5 and 10 MPH winds.

*for 1-6x24: subtension valid @ 6x

SUBTENSIONS IN MOA

A1	A2	A3	B1	C1	C2	C3	C4	C5	C6
0.3	0.8	1.25	25	3	2.4	5.6	9.5	14.6	1.07
C7	C8	C9	C10	C11	C12	C13	D1	D2	D3
1.5	2.25	2	2.7	2.8	3.4	3.7	1.4	19	0.5

MIDAS BTR GEN2 HD
APRS4 SFP IR MIL

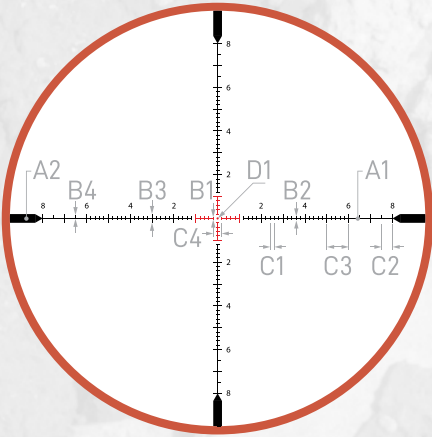


APRS4 SFP IR MIL reticle has an illuminated 2 mil center cross with an open center. A fine .1 diameter floating dot reduces target obstruction, while the illuminated cross provides excellent low light visibility. .2 mil incremental hashmarks out to 6 Mils for windage and elevation makes estimations easy.

*for 4.5-27x50:
subtension valid @ 15x

SUBTENSIONS IN MIL

A1	A2	B1	B2	B3	B4
0.04	0.4	0.1	0.8	0.4	0.15
C1	C2	C3	C4	D1	
0.2	0.5	1	0.4	0.1	

MIDAS BTR GEN2 HD
AHMR SFP IR MOA

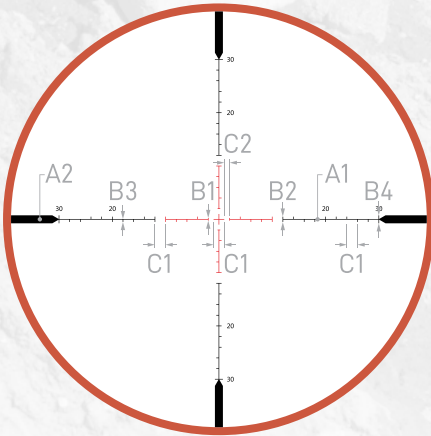


AHMR SFP IR MOA reticle has an illuminated 20 moa center with a 2 moa center cross and 2 moa incremental hash marks which provide a unique two layer visual reference for a shooter to locate and get dead on the target within a blink of an eye. The illuminated reticle provides excellent low light visibility. The unique design of the markings with 2 & 4 moa and 6 & 8 moa locating at the opposite side of the lines gives you a clear reading of the markings with no confusions.

*for 4.5-27x50:
subtension valid @ 15x

SUBTENSIONS IN MOA

A1	A2	B1	B2
0.12	1.5	0.5	1
B3	B4	C1	C2
0.5	1.5	2	1

HELOS BTR GEN2
ATMR4 SFP IR MOA

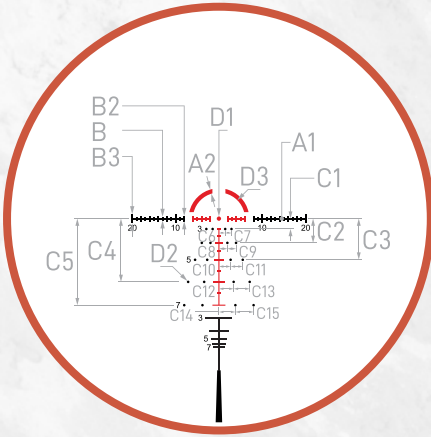

ATMR4 SFP IR MOA reticle is designed for the fast CQB or long-range engagements. The 12 moa illuminated quartered half circle aids in rapid acquisition for close range targets. The drop compensation is designed for 68 or 69 gr .223/5.56 Nato cartridges out to 700 yards. A target ranging reticle located just above the vertical post is designed to estimate target range on a 36" tall silhouette target.

*for 1-10x28:
subtension valid @ 10x

SUBTENSIONS IN MOA


A1	A2	B1	B2	B3	C1	C2	C3	C4	C5	C6	C7
0.25	1	0.8	1.2	2	2.4	5.6	9.5	14.6	20	1.4	1.5
C8	C9	C10	C11	C12	C13	C14	C15	D1	D2	D3	
1.95	2.1	2.7	2.8	3.4	3.7	3.8	4.2	1	0.6	12	





HELOS BTR

ATSR3 SFP IR MOA

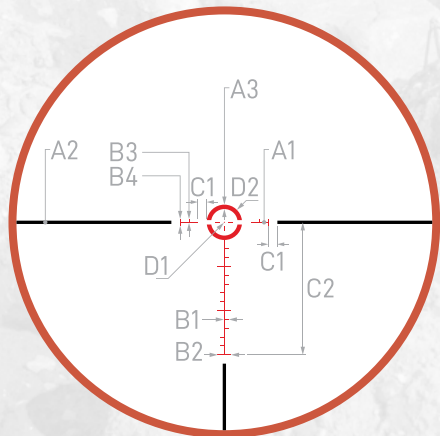

ATSR3 SFP IR MOA is designed for High Power Service Rifle matches. A 12 moa floating cross with a precise .5 moa center dot. The outer circle helps the shooter find the target quickly, while the .5 moa floating dot allows for precise shot placement. Illuminated subtensions provide contrast between the reticle and target.


*for 1-4.5x24:
subtension valid @ 4.5x

SUBTENSIONS IN MOA

A1	A2	A3	B1	B2	B3
0.45	1.5	4	2	6	1.5
B4	C1	C2	D1	D2	
3	4	60	0.5	16	

HELOS BTR GEN2

AHMR2 FFP IR MIL

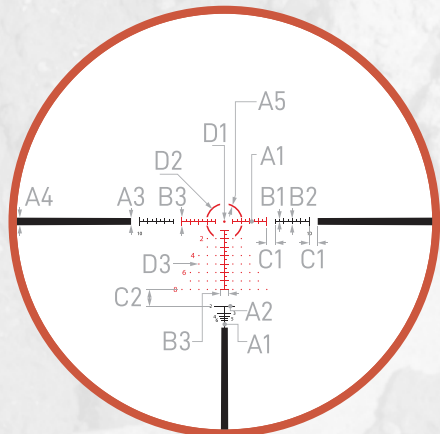


AHMR2 FFP IR MIL reticle is specifically designed for both hunting and shooting competitions. The 0.3 mil (1 moa) red dot is perfect for zeroing your rifle at 100 yards and the dots below the center red dot are for windage holdover with 0.5 mil increments. The center dot with 4 mil diameter circle provides quick aiming point at lower power and enough details for longer distance targets at higher power. The illumination of the reticle provides great visibility during low light conditions. The ranging reticle down below is specially designed for ranging a deer body mass (from belly to the top of shoulder of a whitetail buck) from 200 yds to 600 yds.

SUBTENSIONS IN MIL

A1	A2	A3	A4	A5	B1	B2
0.084	0.05	0.8	1.3	0.18	0.25	0.7
B3	C1	C2	C3	D1	D2	D3
1	1	2	2.5	0.3	4	0.15

HELOS BTR GEN2

AHMR2 FFP IR MOA

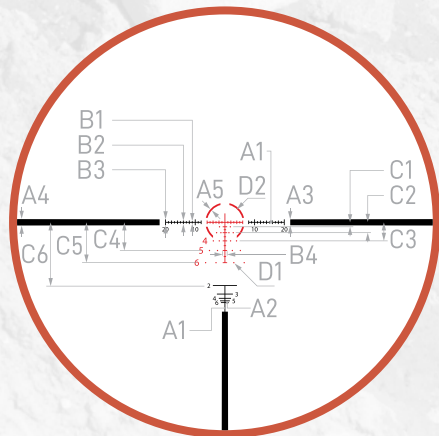


AHMR2 FFP IR MOA reticle is specifically designed for hunting and mid range application and the popular hunting caliber rifles with hold over points for both bullet drop compensation and wind holdover. The reticle is designed for you to zero your rifle a 100 yds center and use the bullet drop holdover up to 700 yds. The dots on horizontal lines below the center are specially designed for holding over for 5 mph and 10 mph wind. The ranging reticle down below is specially designed for ranging a deer body mass (from belly to the top of shoulder of a white-tail buck) from 200 yds to 600 yds. The illuminated center portion of the reticle provides great visibility during dusk and dawn low light conditions.

SUBTENSIONS IN MOA

A1	A2	A3	A4	A5	B1	B2	B3	B4
0.29	0.18	2	3	0.6	0.8	1.2	2	1.5
C1	C2	C3	C4	C5	C6	D1	D2	
1.5	3.5	6.25	9.5	13.6	21.5	0.45	12	

HELOS BTR GEN2

APLR6 FFP IR MOA

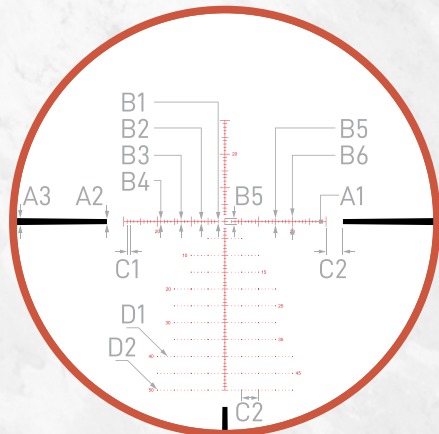

APLR6 FFP IR MOA reticle has a 2 moa floating center cross with 1 moa hash mark increments and drop lines in 5 moa increments on vertical direction down to 50 moa, both of which help you quickly lock in your target and set holdover positions. The gap between the floating center cross and the first hash mark is 1 moa at four directions. The drop lines have smaller dots with 1 moa in between and bigger dots at each 5 moa interval, starting 10 moa length horizontally and end up 40 moa in length at the 50 moa drop line. The unique design of having the floating center cross with 2 moa span in the middle provides little to no target obstruction for engaging small targets at long distances.


SUBTENSIONS IN MOA

A1	A2	A3	B1	B2	B3	B4
0.12*	1.5	2	0.7	0.9	1.1	1.3
B5	B6	C1	C2	D1	D2	
2	3	1	5	0.2	0.3	

*for 4-20x50: A1 = 0.17
for 6-24x56: A1 = 0.12

HELOS BTR GEN2

APRS6 FFP IR MIL

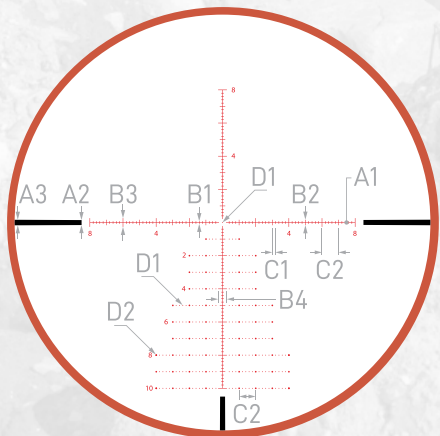

APRS6 FFP IR MIL reticle is designed for Precision Rifle Series competition and any other long-range applications that require accurate ranging capability. It can help you quickly determine distance, hold-over positions, windage correction and leads for a moving target. The unique design of fine 0.2 mil hash mark increments from center to four directions helps the shooter set a quick elevation or windage holdover position. The floating 0.05 mil center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.


SUBTENSIONS IN MIL

A1	A2	A3	B1	B2	B3
0.033*	0.3	0.4	0.18	0.35	0.55
B4	C1	C2	D1	D2	
0.4	0.2	1	0.05	0.1	

*for 4-20x50: A1 = 0.05
for 6-24x56: A1 = 0.033

HERAS SPR

AAGR1 SFP MIL - NEW

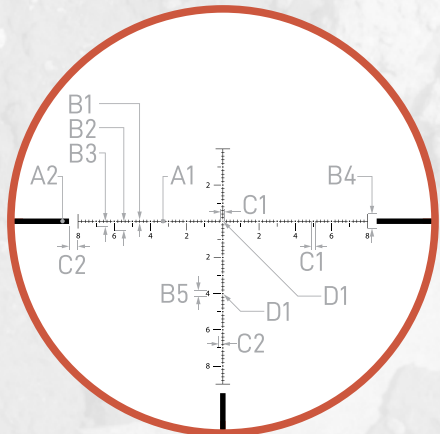

AAGR1 SFP MIL reticle is designed for short and mid-distance shooting with a floating center dot and 0.2 mil hash mark increments in all four directions, that can help you quickly lock in your target and set holdover positions and leads for a moving target. The dots at every 1 mil with 0.2 mil hash marks in between offer greater precision than the classic Mil-Dot reticle. The 0.07 mil floating center dot draws a shooter's vision right on target enabling him or her to engage a small target at long distance with little to no view obstruction.


*for 2-12x42: subtension valid @ 12x

SUBTENSIONS IN MIL

A1	A2	B1	B2	B3
0.03	0.3	0.18	0.5	0.3
B4	B5	C1	C2	D1
1	0.4	0.2	0.5	0.07

HERAS SPR

AAGR1 SFP MOA - NEW

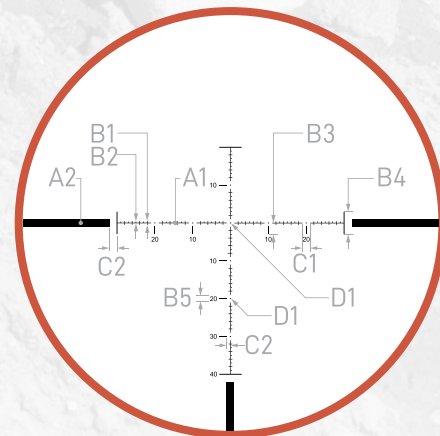

AAGR1 SFP MOA reticle has a 0.3 moa floating center dot and 1 moa increment hash marks in all four directions, which help you quickly lock in your target. The unique design of having floating dots at every 10 moa and 1 moa increment hash marks offers the shooter great reference points on the reticle with little to no view obstruction and helps set any holdover position within a blink of an eye.


*for 2-12x42: subtension valid @ 12x

SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	B4
0.14	2	1	0.4	3	6
B5	C1	C2	C3	D1	
1.2	2	1	2	0.3	

HERAS SPR

AAGR2 SFP MOA - NEW

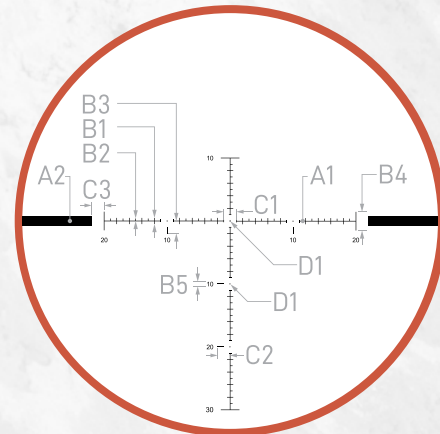

AAGR2 SFP MOA reticle has a 0.2 moa floating center dot and 1 moa increment hash marks, which help you quickly lock in your target. The unique design of having floating dots at every 10 moa and 1 moa increment hash marks offers the shooter great reference points on the reticle with little to no view obstruction and helps set any holdover points within a blink of an eye.

*for 4-20x50: subtension valid @ 20x

SUBTENSIONS IN MOA


A1	A2	B1	B2	B3	B4
0.12	1.5	1	0.4	2	3
B5	C1	C2	C3	D1	
0.7	2	1	2	0.2	





HERAS SPR

AAGR2 SFP MIL - **NEW**

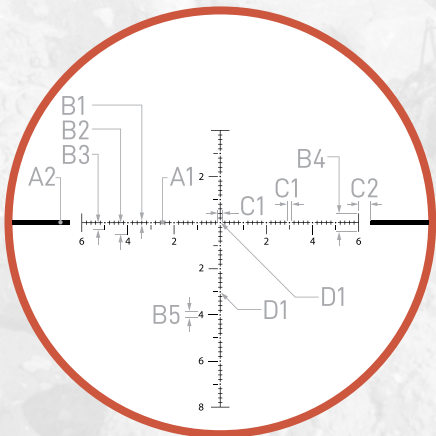

AAGR2 SFP MIL reticle is designed for mid and long-distance shooting with a floating center dot and 0.2 mil hash mark increments in all four directions, that can help you quickly lock in your target and set holdover positions and leads for a moving target. The dots at every 1 mil with 0.2 mil hash marks in between offer greater precision than the classic Mil-Dot reticle. The 0.05 mil floating center dot draws a shooter's vision right on target enabling him or her to engage a small target at long distance with little to no view obstruction.


*for 4-20x50: subtension valid @ 20x

SUBTENSIONS IN MIL

A1	A2	B1	B2	B3
0.02	0.2	0.18	0.5	0.3
B4	B5	C1	C2	D1
1	0.24	0.2	0.5	0.05

HERAS SPR

APRS7 SFP IR MIL - **NEW**

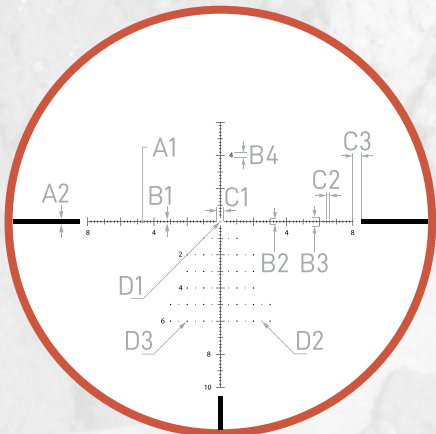

APRS7 SFP IR MIL reticle is designed for long and mid-distance shooting with an illuminated floating center dot and 0.2 mil hash mark increments from center to all four directions, that can help you quickly lock in your target and set holdover positions and leads for a moving target. The illuminated 0.07 mil center dot provides excellent low light visibility and draws a shooter's vision right on target enabling him or her to engage a small target at long distance with little to no view obstruction.


*for 6-24x56: subtension valid @ 16x

SUBTENSIONS IN MIL

A1	A2	B1	B2	B3	B4
0.03	0.3	0.18	0.35	0.55	0.3
C1	C2	C3	D1	D2	D3
0.4	0.2	0.5	0.07	0.05	0.09

HERAS SPR

APLR7 SFP IR MOA - **NEW**

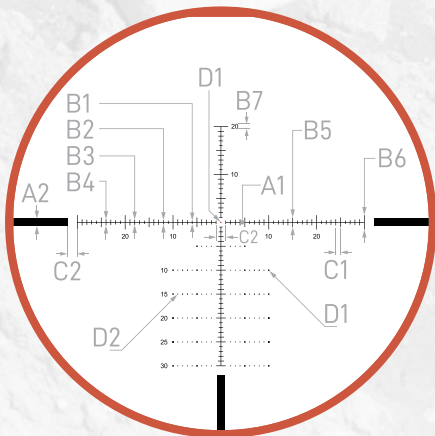

APLR7 SFP IR MOA reticle has an illuminated floating center dot and 1 moa increment hash marks, which help you quickly lock in your target and set holdover positions. The illuminated 0.3 moa center dot helps the shooter quickly locate the target and lock it on the center within a blink of an eye. The illumination provides excellent low light visibility. The 1 moa increment dots on the drop lines offer great precision for wind hold over points down to 30 moa below the center.


*for 6-24x56: subtension valid @ 16x

SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	B4	B5
0.12	1.6	0.7	0.9	1.1	1.3	2
B6	B7	C1	C2	D1	D2	
3	1	1	2	0.3	0.2	

HERAS SPR

APRS8 SFP IR MIL - **NEW**

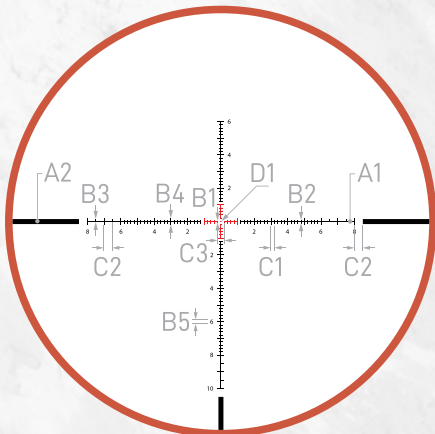

APRS8 SFP IR MIL reticle is designed for mid and long-distance shooting with illuminated 2 mil span center and 0.2 mil hash mark increments from center to all four directions, that can help you quickly lock in your target and set holdover positions and leads for a moving target. The illuminated 2 mil span center with 0.07 mil floating center dot provides excellent low light visibility and draws a shooter's vision right on target enabling him or her to engage a small target at long distance with little to no view obstruction.


*for 6-24x56: subtension valid @ 16x

SUBTENSIONS IN MIL

A1	A2	B1	B2	B3	B4
0.03	0.3	0.1	0.18	0.15	0.4
B5	C1	C2	C3	D1	
0.3	0.2	0.5	0.4	0.07	

HERAS SPR

APLR9 FFP IR MOA - **NEW**

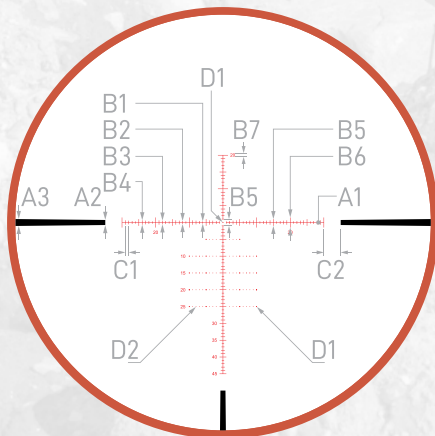


APLR9 FFP IR MOA reticle has a 0.3 moa floating center dot with 1 moa hash mark increments and drop lines in 5 moa increments on vertical direction down to 25 moa, both of which help you quickly lock in your target and set holdover positions. The gap between the center of the floating dot and the first hash mark is 1 moa at four directions. The drop lines have smaller dots with 1 moa in between and bigger dots at each 5 moa, starting 10 moa length horizontally and end up 20 moa in length at the 25 moa drop line. The floating center dot in the middle provides little to none target obstruction for engaging small targets at long distances.

SUBTENSIONS IN MOA

A1	A2	A3	B1	B2	B3	B4
0.11	1.6	2	0.7	0.9	1.1	1.3
B5	B6	B7	C1	C2	D1	D2
2	3	1	1	5	0.3	0.2

ARGOS BTR GEN2

ATSR5 SFP IR MOA

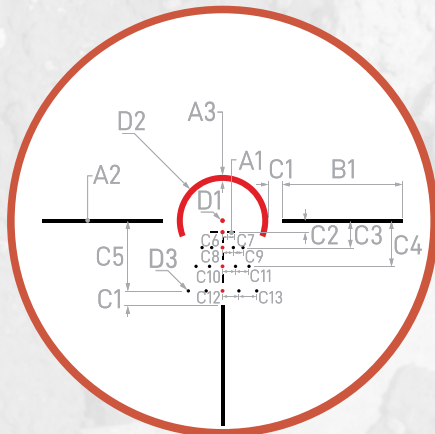

ATSR5 SFP IR MOA reticle is calibrated for a 68 grain Hornady and 69 grain Sierra cartridges, and suitable for any 5.56 Nato/.223 caliber rifle using a 200 yard zero. The 25 moa horizontal and lower 1/3rd crosshairs quickly draw the shooters eye to the illuminated 19 moa horseshoe and 1.4 moa center dot. The 19 moa horseshoe is designed to bracket a silhouette target at 100 yards. With a 200 yard zero, the precise .5 moa elevation holds compensate for 300, 400, 500, and 600 yards and 0, 5, and 10 mph winds.


*for 1-8x24: subtension valid @ 8x

SUBTENSIONS IN MOA

A1	A2	A3	B1	C1	C2	C3	C4	C5	C6
0.3	0.8	1.25	25	3	2.4	5.6	9.5	14.6	10.7
C7	C8	C9	C10	C11	C12	C13	D1	D2	D3
1.5	2.25	2	2.7	2.8	3.4	3.7	1	19	0.7

HERAS SPR

APRS9 FFP IR MIL - **NEW**

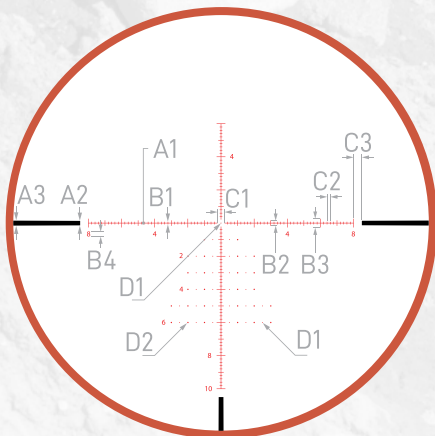


APRS9 FFP IR MIL reticle is designed for Precision Rifle Series competition and any other long-range applications that require accurate ranging capability. It can help you quickly determine distance, holdover positions, windage correction and leads for a moving target. The unique design of fine 0.2 mil hash mark increments from center to four directions helps the shooter set a quick elevation or windage holdover position. The floating 0.04 mil center dot draws a shooter's vision right on target enabling him or her to engage a target at a blink of an eye.

SUBTENSIONS IN MIL

A1	A2	A3	B1	B2	B3
0.033	0.3	0.4	0.18	0.35	0.55
B4	C1	C2	C3	D1	D2
0.3	0.4	0.2	0.5	0.04	0.08

ARGOS BTR GEN2

APLR2 FFP IR MOA

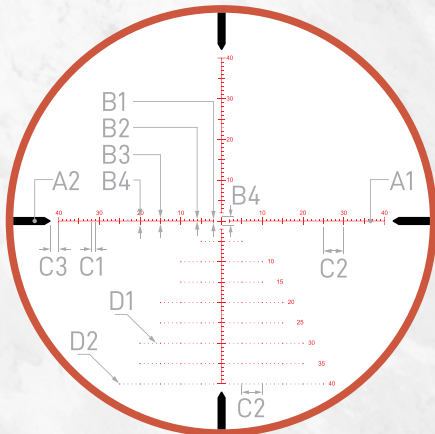

APLR2 FFP IR MOA reticle has a large illuminated center with 1 moa hash mark increments and drop lines in 5 moa increment on vertical direction down to 40 moa, both of which help you quickly lock in your target and set holdover positions. The illuminated portion has a 2 moa span center cross with illuminated cross line extends to 40 moa on both vertical and horizontal direction. The unique design of having droplines going down to 40 moa with 5 moa between each drop line and 1 moa hash marks in between provide excellent hold over positions for long precision shooting.


SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	B4
0.14	2	1	0.5	1.5	2
C1	C2	C3	D1	D2	
1	5	2	0.2	0.3	





ARGOS BTR GEN2 APMR FFP IR MIL

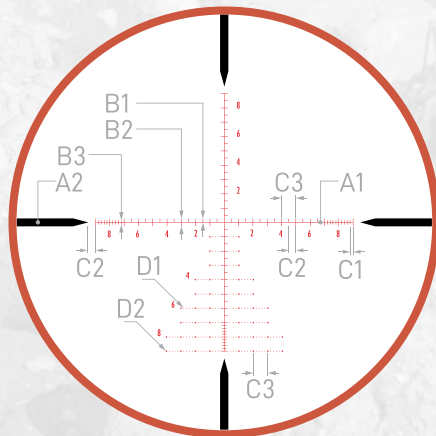


APMR FFP IR MIL reticle is designed to maximize your performance on long and mid-distance shooting with an illuminated center cross and 0.5 mil hash mark. The APMR IR MIL reticle can help you quickly lock in your target and set holdover positions and leads for a moving target. The illuminated 18 mil span cross lines with 0.5 mil hash marks and 0.2 mil hash marks from 7 mil to 9 mil on three directions provide finer details that helps the shooter quickly locate the target and find a holdover position within higher level of precision and confidence.

SUBTENSIONS IN MIL

A1	A2	B1	B2	B3
0.02	0.4	0.2	0.4	0.3
C1	C2	C3	D1	D2
0.2	0.5	1	0.05	0.1

ARGOS HMR BDC 600

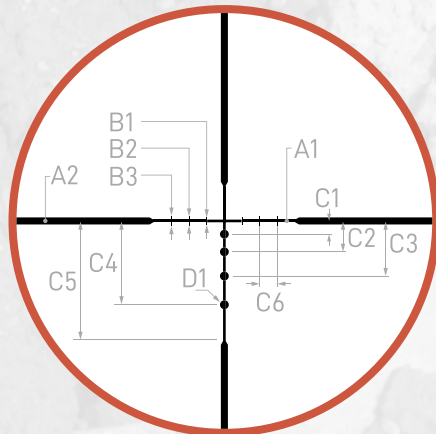


BDC 600 reticle can be used effectively with a variety of firearms as it provides accurate ranges and reference marks that can be used to compensate for bullet drift in windy conditions or range distances.

*for 2-12x42: subtension valid @ 12x
for 4-20x50: subtension valid @ 20x

SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	C1
0.3	0.8	0.8	1	1.2	1.5
C2	C3	C4	C5	C6	D1
3.5	6.25	9.5	13.6	2	1

ARGOS BTR GEN2 BLR SFP MOA

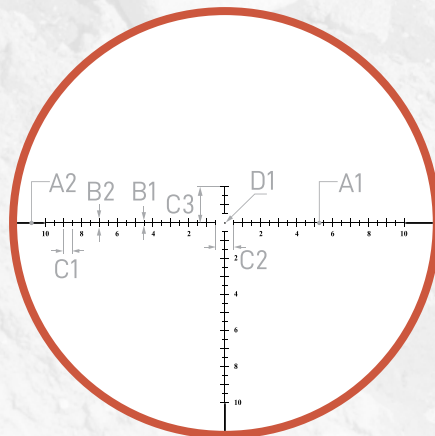


BLR SFP MOA reticle is designed to maximize your performance for both Bench Rest and F-Class shooting applications. Fine line thickness of the reticle (0.016 moa) allows for pinpoint precision at extreme ranges, especially on smaller targets. A non-illuminated floating center dot (0.09 moa thick) provides a precise aiming point. This reticle combined with the Argos BTR Rifle Scope provides the perfect solution.

*for 10-40x56:
subtension valid @ 40x

SUBTENSIONS IN MOA

A1	A2	B1	B2
0.016	0.1	0.3	0.5
C1	C2	C3	D1
0.5	1	2	0.09

ARGOS HMR BDC 600A IR

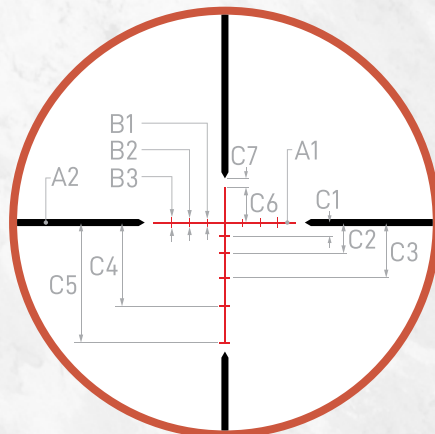


BDC 600A IR reticle can be used effectively with a variety of firearms as it provides accurate ranges and reference marks that can be used to compensate for bullet drift in windy conditions or range distances. The user can sight in at 100 yards on any magnification setting, but for the ballistic reticle feature to function properly, the scope's magnification must be set to the correct power.

*for 2-12x42: subtension valid @ 12x
for 4-20x50: subtension valid @ 20x

SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	C1
0.15	0.6	0.8	1	1.2	1.5
C2	C3	C4	C5	C6	D1
3.5	6.25	9.5	13.6	4	1

ARGOS HMR AHMC SFP MOA

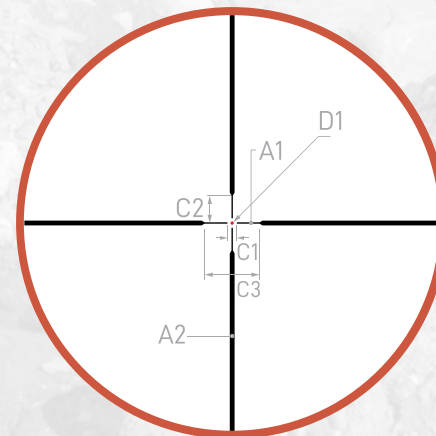


AHMC SFP IR MOA is a traditional hunting style reticle with an illuminated center-dot. The outside crosshair is bold, and prominently stands out against backgrounds that are tough to differentiate. It tapers down to a fine crosshair with a floating center-dot to reduce target obstruction, while drawing your eye to the center of the reticle.

*for 2-12x42: subtension valid @ 12x
for 4-20x50: subtension valid @ 20x

SUBTENSIONS IN MOA

A1	A2	C1
0.25	0.9	2
C2	C3	D1
6.5	13	0.7

TALOS BTR GEN2 ATMR6 SFP IR MOA - NEW

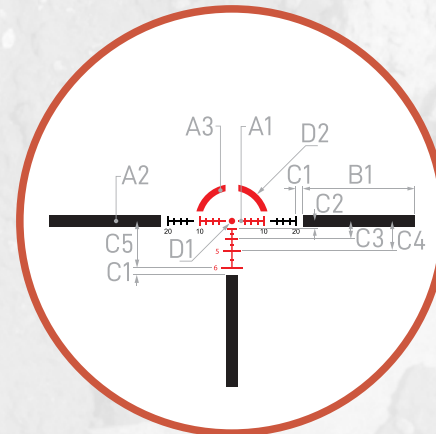


ATMR6 SFP IR MOA reticle is designed for fast CQB or mid-range engagements. The 2 moa center dot with 20 moa illuminated quartered half circle aids in rapid acquisition for close range targets or hunting and stalking in thick brush. The drop compensation is suitable for many standard and magnum calibers out to 600 yards.

*for 1-4x24: subtension valid @ 4x

SUBTENSIONS IN MOA

A1	A2	A3	B1	C1	C2
0.45	3.5	2	35	2	2.4
C3	C4	C5	D1	D2	
5.6	9.5	14.6	2	23	

ARGOS HMR / TALOS MIL-DOT

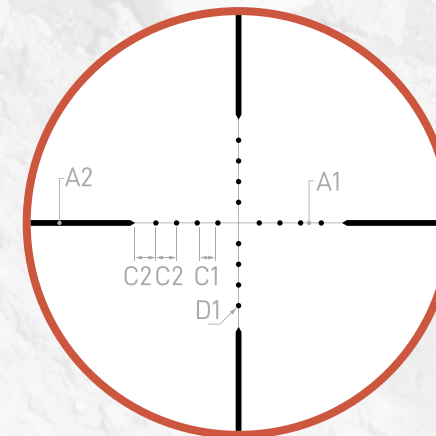


Mil-Dot reticle is one of the most accurate, versatile means of estimating ranges using a manual optical device. The MIL-DOT allows the user to do range estimations, holdover and wind drift compensation as well as for precise leads for moving targets.

*for 4-20x50: subtension valid @ 20x
for 3-12x40: subtension valid @ 12x
for 4-16x40: subtension valid @ 16x

SUBTENSIONS IN MIL

A1	A2	C1
0.05	0.25	0.75
C2	D1	
1	0.25	

TALOS BTR GEN2 AHSR14 SFP IR MIL

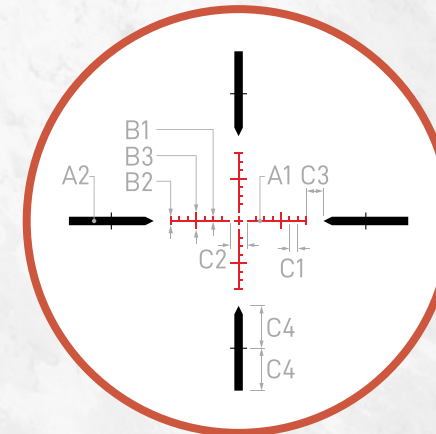

AHSR 14 SFP IR MIL reticle is designed to maximize your performance on short range shooting with illuminated 1 mil center cross and 1 mil hash mark increments extended to 8 mils on both horizontal and vertical directions and can help you quickly spot your target and set holdover positions and leads for a moving target. The illuminated 16 mil center with an 1 mil center cross (0.5 mil from center to the side) and 10 mil black lines enable a shooter to quickly locate the target and put it right on the center cross within a blink of an eye. The illuminated portion of the reticle provides excellent low light visibility.

*for 1-4x24: subtension valid @ 4x


SUBTENSIONS IN MIL

A1	A2	B1	B2	B3
0.13	1	0.5	1	2
C1	C2	C3	C4	
1	2	2	5	





TALOS BTR GEN2
ATMR7 SFP IR MIL - **NEW**

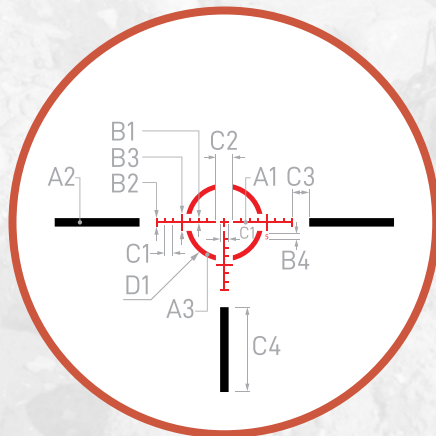


ATMR7 SFP IR MIL reticle is designed to maximize your performance on short and mid-distance shooting with illuminated center cross and 1 mil hash mark, the ATMR7 SFP IR MIL reticle can help you quickly lock in your target and set holdover positions and leads for a moving target. The illuminated 16 mil span cross lines with 1 mil hash marks and 10 mil circle provide great visual reference for quick target acquisition.

*for 1-4x24: subtension valid @ 4x

SUBTENSIONS IN MIL

A1	A2	A3	B1	B2	B3
0.13	1	0.6	0.5	1	2
B4	C1	C2	C3	D1	D2
0.6	1	2	2	10	9.2

TALOS BTR GEN2
APLR2 FFP IR MIL

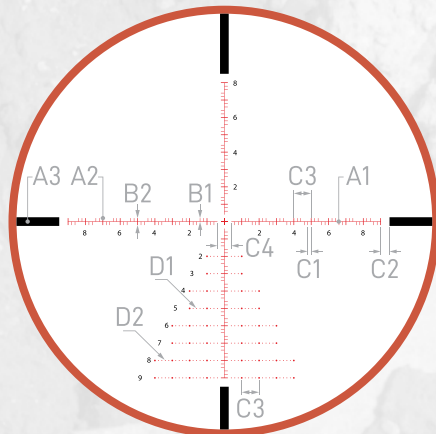


APLR2 FFP IR MIL reticle is designed to maximize your performance on precision long and mid range shooting with accurate ranging capability. It will help you quickly determine distance, holdover positions, windage correction and leads for a moving target. The unique design of fine .2 mil hash mark, having .2 and .4 on one side of either horizontal or vertical line and .6 and .8 on another side, helps the shooter quickly locate a holdover position with .2 mil increments within a blink of an eye. The illuminated fine reticle provides excellent low light visibility and windage holdovers on the bullet drop lines all the way up to 9 mils with .2 mil marks increments between.

SUBTENSIONS IN MIL

A1	A2	A3	B1	B2	C1
0.025	0.04	0.5	0.1	0.2	0.2
C2	C3	C4	D1	D2	
0.5	1	0.8	0.05	0.1	

TALOS BTR GEN2
APLR10 FFP IR MOA - **NEW**

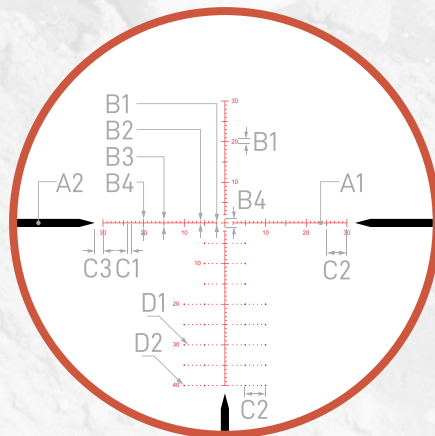


APLR10 FFP IR MOA reticle has a 2 moa floating center cross with 1 moa hash mark increments and drop lines in 5 moa increments on vertical direction down to 40 moa, both of which help you quickly lock in your target and set holdover positions. The gap between the floating center cross and the first hash mark is 1 moa at four directions. The drop lines have smaller dots with 1 moa in between and bigger dots at each 5 moa interval, starting 10 moa length horizontally and end up 20 moa in length at the 40 moa drop line. The unique design of having the floating center cross with 2 moa span in the middle provides little to no target obstruction for engaging small targets at long distances.

SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	B4
0.14	2	1	0.5	1.5	2
C1	C2	C3	D1	D2	
1	5	2	0.25	0.4	

TALOS BTR GEN2
APRS10 FFP IR MIL - **NEW**

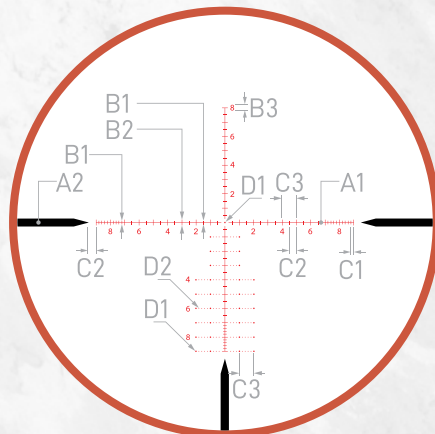


Designed for precision long to mid-range shooting applications, the APRS10 FFP IR MIL reticle can be used to effectively determine ranges, holdovers, windage and moving lead corrections. The unique design of a fine 0.1 mil floating center dot helps the shooter set a precise aiming point over their target. The illuminated reticle provides excellent low light visibility and windage holdovers on the bullet drop lines all the way up to 9 mils.

SUBTENSIONS IN MOA

A1	A2	B1	B2	B3
0.04	0.4	0.25	0.4	0.5
C1	C2	C3	D1	D2
0.2	0.5	1	0.1	0.05

TALOS
BDC 600 IR

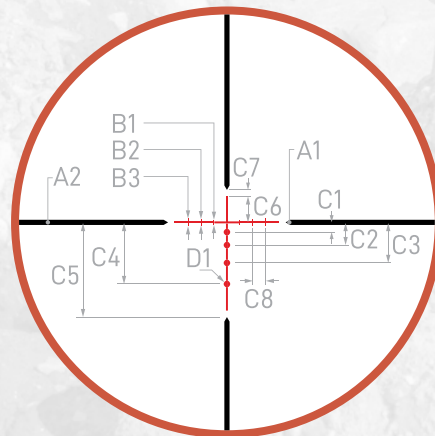


BDC 600 IR was designed to deliver a high level of precision at extended targets that can be used with today's most popular rifle cartridges.

*for 3-12x40: subtension valid @ 12x
for 4-16x40: subtension valid @ 16x
for 6-24x50: subtension valid @ 18x

SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	C1	C2
0.3	0.8	0.8	1	1.2	1.5	3.5
C3	C4	C5	C6	C7	C8	D1
6.25	9.5	13.6	4	1	2	1

TALOS
ATMR1 SFP IR MIL

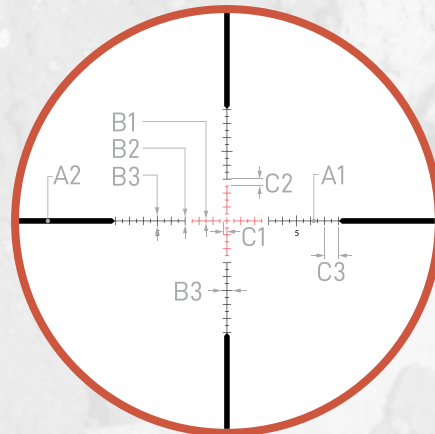


ATMR1 SFP IR MIL reticle is perfect for shooting at the range or competing in competitions. The customized mil hash mark design helps to eliminate any guesswork with holdover and windage adjustments. The illuminated reticle is great for low light situations when you need to count on a good, accurate shot.

*for 6-24x50: subtension valid @ 18x

SUBTENSIONS IN MIL

A1	A2	B1	B2
0.02	0.5	0.3	0.6
B3	C1	C2	C3
0.8	0.25	0.5	1

TALOS / NEOS
CENTER X

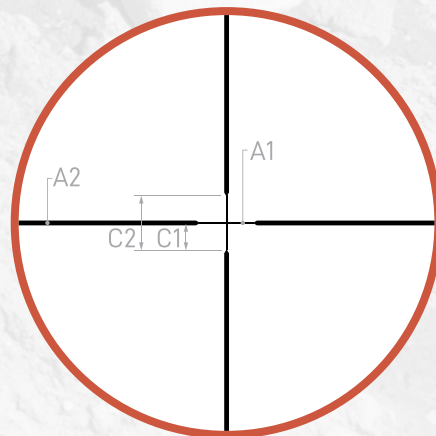

Center X reticle is a perfect choice for shooters wishing to have a clear field of view with a more traditional crosshair. The Center X reticle allows shooters to quickly view their target while maintaining one distinct aiming point on their reticle. The heavy posts stand out nicely against cover and in twilight conditions, pointing boldly to the intersection.


*for 3-9x40: subtension valid @ 9x
for 3-12x40: subtension valid @ 12x
for 4-12x40: subtension valid @ 12x
for 6-18x44: subtension valid @ 18x

SUBTENSIONS IN MOA

MODEL	A1	A2	C1	C2
3-9x40	0.25	0.9	6.5	13
3-12x40	0.18	0.7	4.5	9

MODEL	A1	A2	C1	C2
4-12x40	0.18	0.7	4.5	9
6-18x44	0.12	0.5	3.2	6.5

TALOS
CB100 SFP IR MOA - **NEW**

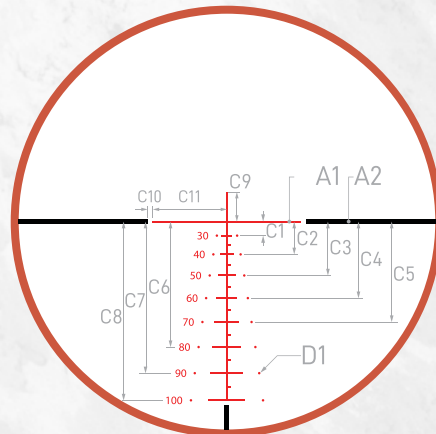


CB100 is specially designed for crossbow with arrow speed from 300FPS to 500 FPS. The illuminated center provides great visibility for low light conditions and hold-over points up to 100 yards for different arrow speeds.

SUBTENSIONS IN MOA

A1	A2	C1	C2	C3	C4	C5
0.6	2	5.73	13.34	21.9	31.09	40.79
C6	C7	C8	C9	C10	C11	D1
50.95	61.55	72.57	12	2	30	1



NEOS
BDC 22 RIMFIRE

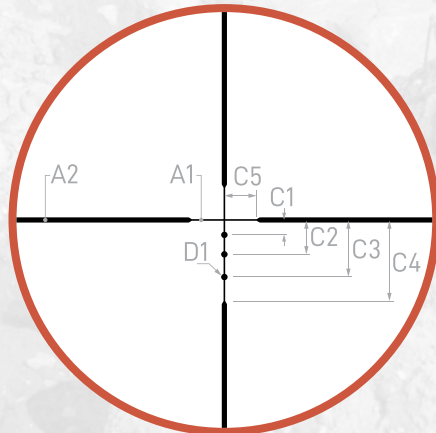


BDC22 Rimfire reticle was designed specifically for rimfire. This reticle allows shooters to compensate for bullet drop at extended shooting distances. When using a .22 LR with a muzzle velocity of approximately 1,250 feet per second, this reticle is designed to be zeroed at 50 yards, providing bullet drop compensation for 75, 100, 125 and 150 yards.

*for 3-9x40: subtension valid @ 9x
for 4-12x40: subtension valid @ 12x

SUBTENSIONS IN MOA

A1	A2	C1	C2
0.25	0.8	2.3	5.3
C3	C4	C5	D1
8.8	12.5	5	1

NEOS
BDC 500 IR

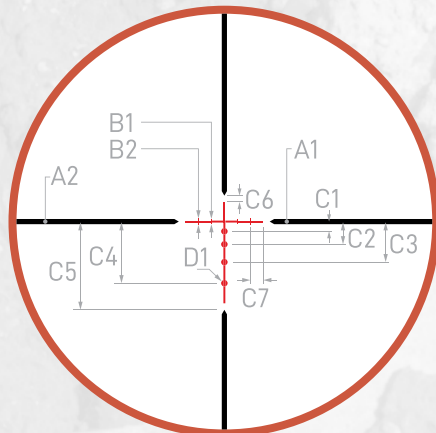


BDC 500 IR was designed to deliver a high level of precision at extended targets that can be used with today's most popular rifle cartridges.

*for 3-9x40: subtension valid @ 9x
for 4-12x40: subtension valid @ 12x
for 6-18x44: subtension valid @ 18x

SUBTENSIONS IN MOA

A1	A2	B1	B2	C1	C2
0.3	0.8	0.8	1	1.5	3.5
C3	C4	C5	C6	C7	D1
6.25	9.5	13.6	1	2	1

NEOS
BDC 250 MUZZLE LOADER IR - NEW

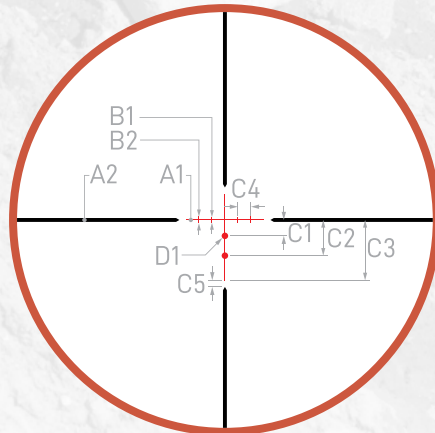

BDC 250 Muzzle Loader IR was designed to deliver a high level of confidence at extended targets that can be used with today's most popular muzzle loader rounds.


*for 3-9x40: subtension valid @ 9x

SUBTENSIONS IN MOA

A1	A2	B1	B2	C1
0.15	0.6	0.8	1	2.45
C2	C3	C4	C5	D1
5.5	9.3	2	1	1.2

RED DOT SIGHT RETICLES


MIDAS
TSR1 | TSR1-M | EDC | TSR2 | TSR3



SUBTENSIONS IN MOA

D1 (TSR1, TSR1-M)	D1 (EDC)	D1 (TSR2, TSR3)
3 or 6	3	2


TALOS
EDC



SUBTENSIONS IN MOA


D1
3

MIDAS
LE-GEN2 (Interchangeable)



SUBTENSIONS IN MOA

A1	B1	C1	C2	D1	D2
1.5	14	15	72	2	65



Dot




Circle



Dot-Circle

PRISM SCOPE RETICLES


MIDAS
TSP1 (RED/GREEN)

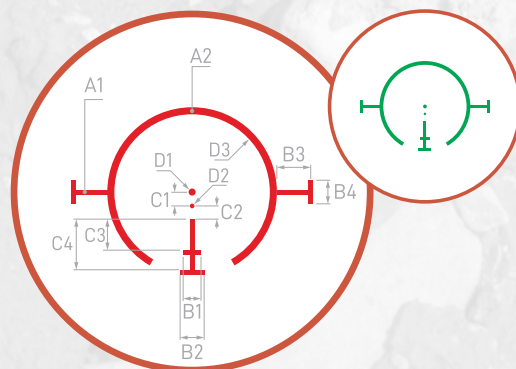

SUBTENSIONS IN MOA

A1	A2	B1	B2	B3	B4	C1
2	3	7.6	10.2	15	10	5.9
C2	C3	C4	D1	D2	D3	
5.6	13.2	22	3	2	66	


MIDAS
TSP3 (RED/GREEN)

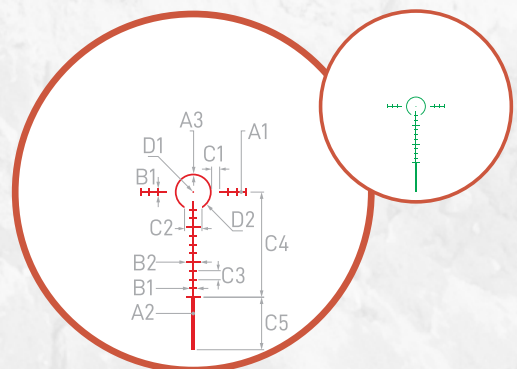

SUBTENSIONS IN MOA

A1	A2	A3	B1	B2	C1
0.6	1.8	1	4	8	4.5
C2	C3	C4	C5	D1	D2
10	5	60	30	1	21

MIDAS
TSP4 (RED/GREEN)

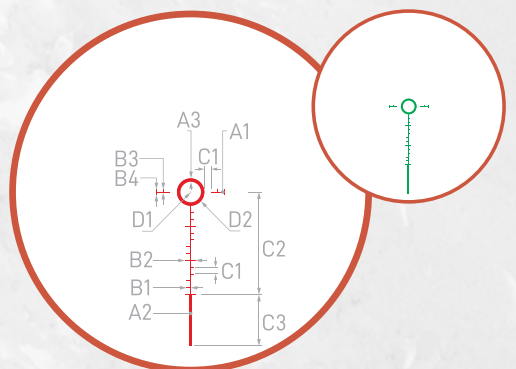

SUBTENSIONS IN MOA

A1	A2	A3	B1	B2	B3
0.45	1.5	2	2	6	1.5
B4	C1	C2	C3	D1	D2
3	4	30	60	0.5	16





TRIPODS

Rock. Solid. Stability. Athlon's carbon fiber tripods come ready to support your rifle with the included bowl mount or ball head. The ball head features Friction Control, Fluid Pan Control, Ball Lock, and Arca compatibility for direct-to-rifle attachment. Three leg diameter options offer increasing stability and max support weight for spotting optics or as a weapon-mount platform.

For those that prefer a traditional center-shaft style tripod, the aluminum 28mm provides excellent stability and versatility, ideal for a dedicated spotting optic tripod.



CF TRIPOD HEAD PARTS

- 1 Quick Release Arca Plate
- 2 Quick Release Knob
- 3 Ball Lock Knob
- 4 Friction Control Knob
- 5 Fluid Pan Control Knob
- 6 Weight/Accessory Hook

AL TRIPOD HEAD PARTS

- 1 Quick Release Arca Plate
- 2 Quick Release Knob
- 3 Ball Lock Knob
- 4 Friction Control Knob
- 5 Fluid Pan Control Knob

PRODUCT SPECIFICATION

TRIPOD MODEL	HEAD STYLE	HEAD MOUNT	LEG MATERIAL	MAX LEG DIA.	MAX EXT. HEIGHT	LOWEST EXT. HEIGHT.	FOLDED HEIGHT	WEIGHT	MAX LOAD
CF40	BALL	ARCA-SWISS	CARBON FIBER	40 mm	71"	10"	29"	8.4 lb	88 lb
CF36	BALL	ARCA-SWISS	CARBON FIBER	36 mm	71"	10"	29"	7.7 lb	66 lb
CF32	BALL	ARCA-SWISS	CARBON FIBER	32 mm	65"	9"	26"	5.7 lb	55 lb
CF29	BALL	ARCA-SWISS	CARBON FIBER	29 mm	65"	9"	26"	5.5 lb	33 lb
AL28	BALL	ARCA-SWISS	ALUMINUM	28 mm	65"	17"	27"	4.7 lb	26 lb



BEST
USED
FOR



VISIT THE
PRODUCT
PAGE





VISIT THE
PRODUCT
PAGE



ACCESSORIES



ACCESSORIES

athlonoptics.com

113

PRECISION RINGS



DIAMETER	1"	30 mm	30 mm	30 mm
SIZE	MED	LOW	MED	MSR
HEIGHT	.9"	.89"	1.05"	1.443"
DIAMETER	34 mm	34 mm	34 mm	
SIZE	LOW	MED	MSR	
HEIGHT	.96"	1.16"	1.519"	

ARMOR RINGS



DIAMETER	1"	30 mm	30 mm	30 mm
SIZE	MED	LOW	MED	MSR
HEIGHT	.9"	.868"	.993"	1.443"
DIAMETER	34 mm	34 mm	34 mm	
SIZE	LOW	MED	MSR	
HEIGHT	.944"	1.069"	1.519"	

BINOCULAR HARNESS

Front and center, high and tight! Featuring a 4-point harness for all-day comfort, the new Athlon binocular harness eliminates sag and bounce. Go unnoticed while reaching for your binoculars, thanks to the magnetic closure and clasp-less design. Side mesh pockets and a securely zippered back mesh pocket add additional storage for all your accessories.

KEY FEATURES



OTHER FEATURES

Fold-Down Lid Retention, Magnetic Closure for Quiet Access, 4 Point Harness for All Day Comfort, Zippered Back Mesh Pocket, Side Mesh Pockets



AR TACTICAL CANTILEVERS



DIAMETER	30 mm	30 mm	34 mm
ANGLE (MOA)	0	20	20

ARMOR CANTILEVERS



DIAMETER	1"	30 mm	30 mm	34 mm	34 mm
ANGLE (MOA)	0	0	20	0	20

SCOPE SUNSHADES

Cronus BTR GEN2 UHD, Ares ETR, Ares BTR GEN2, Midas TAC, Midas HMR, Midas BTR GEN2, Helos BTR GEN2, Argos BTR GEN2, Talos BTR riflescopes.

Black matte surface finish, 4.5 inches long, sizes in 56, 50, 44mm.





WHAT EXPERTS SAY ABOUT ATHLON OPTICS



ARES G2 UHD GREAT OPTICAL QUALITY FOR THE PRICE



The optical quality is batting well above its price class. Really good light transmission and was able to glass well into the evening. I do wish these scopes had a secondary focus adjustment but the large ring is useable to penetrate brush. I think the focal length of 15-45 may be a bit short for some western hunts, but is ok for shorter range glassing to determine rack size. It's a definite trade of weight for range. I'd recommend this to anyone looking for a lighter spotting scope at a great price.

Evan Hatter

ARGOS HMR TRUE VALUE!



For me, this scope provides the best dollar for dollar value I have over the more than twenty plus scopes I currently own. What works for me are 1) the generous objective 2) the lens coatings that actually gather light and 3) turrets that track true.

Peter de KAM

MIDAS TAC HEAVY HITTER AND EASY ON THE POCKETBOOK



I bought the Midas TAC 5-25x56 to go on a 6.5 Grendel build. I read and watched several reviews and everything was mostly positive. I was still a bit skeptical with the price point but decided if it didn't work for what I needed on the 6.5 I would just use it on my CZ-457 and would be super overkill. I have now been using the Midas TAC and all I can say is wow! Glass is clean and clear, MOA hash marks are easy to read and are spot on. There is more MOA adjustment than my SIG Tango6, everything tracks perfectly and the zero stop is easy to set and solid. I love that the windage is capped because I never touch my windage and normally only use holdover. My only issue is that on 25x the eye relief is pretty small but not really a big problem. I will be ordering another one shortly in a 30mm tube to use on my CZ.

Steve Maze

HELOS BTR GEN2 BEST SERIES OF OPTICS FOR THE PRICE



Shooting made easy with the Helos. 300 win mags are capable but exponentially more so when your optics are great. The Helos provided all the necessary feature for a great prison rifle with a few bells and whistles that make it that much better, like an illuminated reticle. Great scope for entry level and medium level shooter but also great for experienced shooters looking to save without sacrificing quality.

Grayson Rickenbaker

CRONUS G2 UHD KEY TO SUCCESS



I hunt in Eastern Washington in open fields with long shots. Optics are the key to success on these hunts. The Cronus G2 UHD has provided exceptional clarity and focus on these hunts, and you cannot buy better binoculars for this price. These binoculars are suited for both beginners and experts. My granddaughter uses them to spot birds in our yard and often comments on their clarity.

Bryan DuCommun

MIDAS TRIPOD EXCEPTIONAL QUALITY



I was looking for a tripod that I could use for everything from a stable spotting base with my binos to a stable shooting platform. I am 6'4" and I can use this with my binos without having to bend over and kill my back and absolutely love it. Great product and good build quality. This tripod is fitting for anyone who is just starting out or the experienced user. Would recommend to anyone who is in need of one.

Dustin D.





**SHARP, TIGHT
AND PRICED
JUST RIGHT!**



801 N MEADOWBROOK DR.
OLATHE, KS 66062

TOLL FREE: 1-855-913-5678
contact@athlonoptics.com

www.athlonoptics.com