

PRODUCT	MODEL	RETICLE	SKU#	PAGE
CRONUS ATS THERMAL SCOPE	35-400	5 MOA RETICLES 5 MIL RETICLES	210130	1/2

## IDEAL APPLICATION



PREDATOR  
HUNTING



VARMINT  
HUNTING

## TOP FEATURES

### CUTTING-EDGE THERMAL SENSOR

The cutting-edge 12µm pixel thermal sensor offers a high-resolution thermal image and maximum detection range.

### HIGH-RESOLUTION OLED DISPLAY

A 0.39" OLED display with a 1440 x 1080 resolution provides a sharp, high contrast view with vivid color.

### WIFI & BLUETOOTH


Apple and Android Compatible app allows users to record audio, video, and download images directly to their personal device.

## ALL FEATURES


Cutting-edge Thermal Sensor, High-resolution OLED Display, Wifi & Bluetooth, 10 Built-in Interchangeable Reticles, 6 Reticle Color Options, 10 Illumination Settings, 64 GB Memory Capacity, Auto Power-OFF, 6 Color Palette Options, 10 Detection Sensitivity, Auto Shot Record, One Shot Zero, Eco Mode, Waterproof, Fog Proof, Shockproof, Long Battery Life.

## RETICLES

### MOA RETICLES

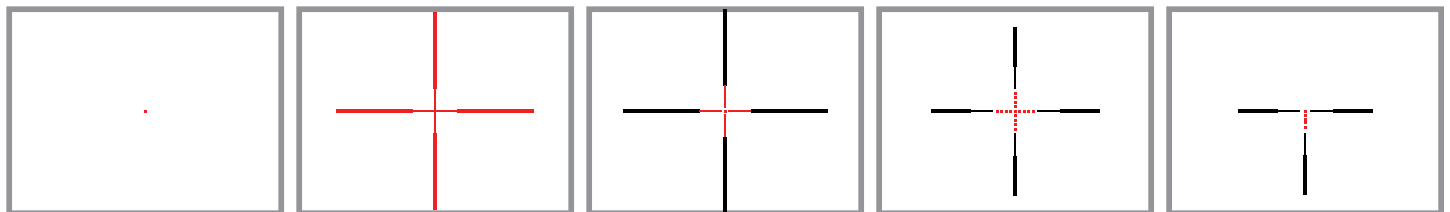

### MIL RETICLES

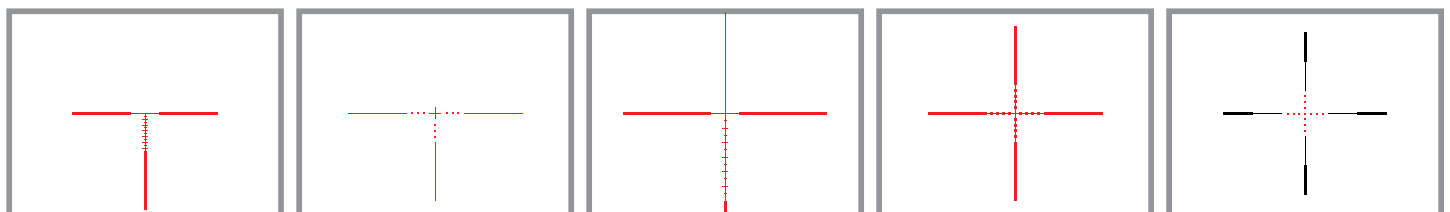

### RETICLE COLOR OPTIONS




SHARP, TIGHT  
AND PRICED  
JUST RIGHT!

PRODUCT	MODEL	RETICLE	SKU#	PAGE
CRONUS ATS THERMAL SCOPE	35-400	5 MOA RETICLES 5 MIL RETICLES	210130	2/2

THERMAL SENSOR	400 x 300 @12µm			
NETD	≤25mK @ 77°F/25°C			
DISPLAY RESOLUTION	1440 x 1080			
DISPLAY	0.39" OLED			
LENS SYSTEM	35 mm F1.0			
FIELD OF VIEW	7.8° x 5.9°			
BASE MAGNIFICATION	2.65X			
COMBINED MAGNIFICATION	10.6X			
EYE RELIEF	1.9"			
DETECTION RANGE	2620 Yds			
RECOGNITION RANGE	1090 Yds			
COLOR PALETTES	White Hot, Black Hot, Adjustable Red Hot, Green Hot, Iron Red, Blue Hot			
RETICLE	10 Built-in Reticles (5 MOA, 5 MIL)			
RETICLE ADJUSTMENT	Digital			
DISTANCE MEASUREMENT	Stadiametric Ranging			
VIDEO RECORD / SNAPSHOT	1440 x 1080			
BUILT-IN MEMORY	64 GB			
WI-FI CONNECTION	Yes			
STANDBY MODE	Yes			
BATTERY	1 Built-in Battery, and 2 Spare External Batteries			
BATTERY LIFE	≥ 10 h @ 77°F/25°C			
EXTERNAL POWER	5V2A Adapter (USB Type-C)			
WORKING TEMPERATURE	-22°F to 122°F / -30°C to 50°C			
WATERPROOF	IP67			
WEIGHT	35.3 oz			
ZEROING PROFILES	10			

### DETAILED DIMENSIONS

L1	L2	L3	L4	L5	L6	D1	D2
14.3"	4.5"	5.6"	4.2"	1.9"	1.9"	1.75"	2.35"

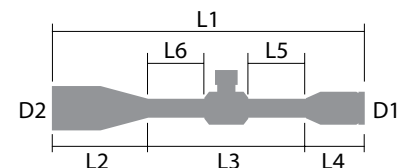

**SHARP, TIGHT  
AND PRICED  
JUST RIGHT!**